


**To apply the GraphiTI to the slide case of your calculator:**

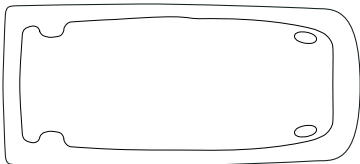

- With the slide case turned horizontally, peel the back off of the GraphiTI and position it over the rubber feet on the slide case. When positioned correctly, adhere the GraphiTI to the slide case and press evenly from the center outward so that air is not trapped. If there are any air bubbles, press them to the nearest edge for a smooth fit. If necessary, you may gently remove the GraphiTI to re-position it on the slide case.
- To remove the GraphiTI from the slide case, gently pull up a corner of the GraphiTI and slowly pull it off of the slide case. (It is recommended that the calculator with the GraphiTI applied not be left in high heat as this can hinder removal of the GraphiTI.) Remove the calculator from the slide case when cleaning to ensure that your calculator is not damaged. If any adhesive residue remains on the slide case, use a moist paper towel and clean the slide case.
- Your GraphiTI will perform best if not subjected to excessive hot or cold temperatures.

GraphiTIs are provided "as-is" without warranty.