

TI-Nspire™ CX Premium Teacher Software Guidebook

Important Information

Except as otherwise expressly stated in the Licence that accompanies a programme, Texas Instruments makes no warranty, either express or implied, including but not limited to any implied warranties of merchantability and fitness for a particular purpose, regarding any programmes or book materials and makes such materials available solely on an "as-is" basis. In no event shall Texas Instruments be liable to anyone for special, collateral, incidental or consequential damages in connection with or arising out of the purchase or use of these materials, and the sole and exclusive liability of Texas Instruments, regardless of the form of action, shall not exceed the amount set forth in the licence for the programme. Moreover, Texas Instruments shall not be liable for any claim of any kind whatsoever against the use of these materials by any other party.

© 2021 Texas Instruments Incorporated

Adobe®, Excel®, Mac®, Microsoft®, PowerPoint®, Vernier DataQuest™, Vernier EasyLink®, Vernier EasyTemp®, Vernier Go!Link®, Vernier Go!Motion®, Vernier Go!Temp®, Windows®, and Windows® XP are trademarks of their respective owners.

Actual products may vary slightly from provided images.

Contents

Getting Started with TI-Nspire™ CX Premium Teacher Software	1
Selecting the Handheld Type Exploring the Content Workspace Exploring the Documents Workspace Changing Language Using Software Menu Shortcuts Using Handheld Keyboard Shortcuts	2 3 4
Using the Content Workspace	15
Exploring the Content Workspace Exploring the Resources Pane Using the Preview Pane Accessing Computer Content Using Shortcuts Working with Links Using Web Content	15 17 18 20
Working with Connected Handhelds	27
Viewing Content on Connected Handhelds Managing Files on a Connected Handheld Sending Files to Handhelds Preparing Handhelds Remotely Checking for an OS Update Installing an OS Update Renaming Handhelds Using Identify Selected to Locate Handhelds	29 31 34 37 38
Using the Transfer Tool	43
Transfer Tool Interface Opening the Transfer Tool Adding Files or Folders to the Transfer List Removing Files or Folders from the Transfer List Editing the Destination Folder Deleting All Handheld Files and Folders Starting a Transfer Stopping File Transfers Closing the Transfer Tool	45 45 47 48 50
Using the Documents Workspace	52
Exploring the Documents Workspace	52

	Using the Documents Toolbox	52
	Exploring Document Tools	53
	Exploring the Page Sorter	53
	Exploring the TI-SmartView™ Feature	54
	Exploring Content Explorer	56
	Exploring Utilities	58
	Using the Work Area	59
	Changing Document Settings	59
	Changing Graphs & Geometry Settings	61
W	orking with TI-Nspire™ Documents	63
	Creating a New TI-Nspire™ Document	63
	Opening an Existing Document	64
	Saving TI-Nspire™ Documents	65
	Deleting Documents	66
	Closing Documents	66
	Formatting Text in Documents	67
	Using Colours in Documents	68
	Setting Page Size and Document Preview	68
	Working with Multiple Documents	70
	Working with Applications	71
	Selecting and Moving Pages	74
	Working with Problems and Pages	77
	Printing Documents	79
	Viewing Document Properties and Copyright Information	80
W	orking with PublishView™ Documents	82
	Creating a New PublishView™ Document	82
	Saving PublishView™ Documents	86
	Exploring the Documents Workspace	87
	Working with PublishView™ Objects	91
	Working with TI-Nspire™ Applications	97
	Working with Problems	
	Organizing PublishView™ Sheets	103
	Using Zoom	
	Adding Text to a PublishView™ Document	
	Using Hyperlinks in PublishView™ Documents	
	Working with Images	116
	Working with Video Files	118
	Converting Documents	
	Printing PublishView™ Documents	121

Working with Lesson Bundles	
Creating a New Lesson Bundle	
Adding Files to a Lesson Bundle	124
Opening a Lesson Bundle	126
Managing Files in a Lesson Bundle	126
Managing Lesson Bundles	128
Packaging Lesson Bundles	130
Emailing a Lesson Bundle	131
Sending Lesson Bundles to Connected Handhelds	131
Capturing Screens	133
Accessing Screen Capture	133
Using Capture Page	134
Using Capture Selected Handheld	135
Viewing Captured Screens	135
Saving Captured Pages and Screens	136
Copying and Pasting a Screen	
Capturing Images in Handheld Mode	
Using Capture Class	
Setting Teacher Preferences for Capture Class	142
Setting View Options in Capture Class	143
Creating Stacks of Student Screens	
Comparing Selected Screens	148
Using Make Presenter	148
Saving Screens When Using Capture Class	148
Printing Captured Screens	149
Working with Images	151
Working with Images in the Software	151
Using Question in the Teacher Software	154
Understanding the Question Tools	154
Using the Teacher Tool Palette	155
Understanding the Configuration Tool	156
Formatting Text and Objects	
Adding Images to Questions	158
Adding Questions	158
Responding to Questions	173
Understanding the Question Toolbar	173
Types of Questions	
Responding to Quick Poll Questions	174

Submitting Responses	176
Calculator Application	177
Entering and Evaluating Maths Expressions	178
CAS: Working with Measurement Units	
Using the Unit Conversion Assistant	187
Working with Variables	189
Creating User-defined Functions and Programmes	190
Editing Calculator Expressions	194
Financial Calculations	195
Working with the Calculator History	196
Using Variables	200
Linking Values on Pages	200
Creating Variables	200
Using (Linking) Variables	205
Naming Variables	207
Adjusting Variable Values with a Slider	208
Locking and Unlocking Variables	210
Removing a Linked Variable	212
Graphs Application	214
What You Must Know	215
Graphing Functions	217
Exploring Graphs with Path Plot	218
Manipulating Functions by Dragging	219
Specifying a Function with Domain Restrictions	221
Finding Points of Interest on a Function Graph	222
Graphing a Family of Functions	224
Graphing Equations	225
Graphing Conic Sections	226
Graphing Relations	229
Graphing Parametric Equations	232
Graphing Polar Equations	232
Graphing Scatter Plots	233
Plotting Sequences	234
Graphing Differential Equations	236
Viewing Tables from the Graphs Application	239
Editing Relations	240
Accessing the Graph History	241
Zooming/Rescaling the Graphs Work Area	242
Customising the Graphs Work Area	244

Н	liding and Showing Items in the Graphs Application	247
C	onditional Attributes	248
C	alculating a Bounded Area	249
Т	racing Graphs or Plots	251
Ir	ntroduction to Geometric Objects	253
С	reating Points and Lines	255
С	reating Geometric Shapes	260
С	reating Shapes Using Gestures (MathDraw)	266
В	asics of Working with Objects	269
N	Neasuring Objects	272
Т	ransforming Objects	277
E	xploring with Geometric Construction Tools	280
Α	nimating Points on Objects	285
Α	djusting Variable Values with a Slider	286
La	abelling (Identifying) the Coordinates of a Point	288
D	Displaying the Equation of a Geometric Object	289
U	Ising the Calculate Tool	290
3D C	Lanke	202
	iraphs	
	Graphing 3D Functions	
	Graphing 3D Parametric Equations	
	otating the 3D View	
	diting a 3D Graph	
	ccessing the Graph History	
	changing the Appearance of a 3D Graph	
	howing and Hiding 3D Graphs	
	sustomising the 3D Viewing Environment	
	racing in the 3D View	
E:	xample: Creating an Animated 3D Graph	300
Geor	metry Application	302
V	Vhat You Must Know	302
Ir	ntroduction to Geometric Objects	305
С	reating Points and Lines	307
	reating Geometric Shapes	
	reating Shapes Using Gestures (MathDraw)	
	asics of Working with Objects	
	Measuring Objects	
	ransforming Objects	
	xploring with Geometric Construction Tools	
	Ising Geometry Trace	
	Conditional Attributes	

Hiding Objects	in the Geometry Application	339
Customizing the	e Geometry Work Area	340
Animating Poin	ts on Objects	341
Adjusting Varial	ble Values with a Slider	342
Using the Calcu	late Tool	344
Lists & Spreadsh	eet Application	347
Creating and Sh	aring Spreadsheet Data as Lists	348
Creating Spread	dsheet Data	
Navigating in a	Spreadsheet	
Working with C	ells	354
Working with R	ows and Columns of Data	358
Generating Col	umns of Data	362
Graphing Sprea	dsheet Data	365
0 0	a with Other Computer Software	
	from Graphs & Geometry	
	a for Statistical Analysis	
Statistics Input	Descriptions	
Statistical Calcu	llations	379
	ervals	
Working with F	unction Tables	396
Data & Statistics	Application	398
Basic Operation	ns in Data & Statistics	399
Overview of Ra	w and Summary Data	403
Working with N	lumeric Plot Types	404
Working with C	ategorical Plot Types	413
Exploring Data		421
Using Window/	Zoom Tools	430
Graphing Funct	ions	431
Using Graph Tra	ace	436
	ur Workspace	
	ble Values with a Slider	
Inferential Stati	stics	441
Notes Applicatio	n	443
Using Template	es in Notes	444
	t in Notes	
		116

	Inserting Images	447
	Inserting Items on a Notes Page	447
	Inserting Comments	448
	Inserting Geometric Shape Symbols	448
	Entering Maths Expressions in Notes Text	449
	Evaluating and Approximating Maths Expressions	. 450
	Using Maths Actions	452
	Graphing from Notes and Calculator	455
	Inserting Chemical Equations in Notes	456
	Deactivating Maths Expression Boxes	457
	Changing the Attributes of Maths Expression Boxes	. 458
	Using Calculations in Notes	459
	Exploring Notes with Examples	460
D -	An Callaskian	465
υa	ta Collection	. 465
	What You Must Know	466
	About Collection Devices	
	Connecting Sensors	471
	Setting Up an Offline Sensor	472
	Modifying Sensor Settings	473
	Collecting Data	475
	Using Data Markers to Annotate Data	. 479
	Collecting Data Using a Remote Collection Unit	481
	Setting Up the Sensor for Triggering	
	Collecting and Managing Data Sets	485
	Using Sensor Data in Programmes	
	Collecting Sensor Data using RefreshProbeVars	489
	Analysing Collected Data	
	Displaying Collected Data in Graph View	496
	Displaying Collected Data in Table View	
	Customising the Graph of Collected Data	502
	Striking and Restoring Data	511
	Replaying the Data Collection	
	Adjusting Derivative Settings	513
	Drawing a Predictive Plot	. 514
	Using Motion Match	515
	Printing Collected Data	. 515
Wi	idgets	. 518
	Creating a Widget	518
	Adding a Widget	
	Saving a Widget	521

Libraries	522
What is a Library?	
Creating Libraries and Library Objects	522
Private and Public Library Objects	523
Using Library Objects	524
Creating Shortcuts to Library Objects	525
Included Libraries	525
Restoring an Included Library	526
Using Press-to-Test	527
Entering Press-to-Test Mode by Choosing Restrictions	
Entering Press-to-Test Mode with a Test Code	
Test Code Examples	532
Accessing Press-to-Test Help	
Clearing Data in Press-to-Test Mode	533
Reviewing Press-to-Test Mode Restrictions	534
Operating the Handheld in Press-to-Test Mode	535
Working with Documents in Press-to-Test Mode	537
Transferring Press-to-Test Restrictions	538
Exiting Press-to-Test Mode	540
Cancelling Press-To-Test on Multiple Handhelds	541
Understanding Press-to-Test Restrictions	544
Press-to-Test for TI-84 Plus Mode	547
Using the TI-SmartView™ Emulator	551
Opening the TI-SmartView™ Emulator	551
Choosing Display Options	552
Working with the Emulated Handheld	553
Using the Touchpad	554
Using Settings and Status	
Changing TI-SmartView™ Options	555
Working with Documents	556
Using Screen Capture	556
Using the Help Menu	557
Activating Your Software Licence	557
Registering Your Product	559
Downloading the Latest Guidebook	559
Exploring TI Resources	559
Updating the TI-Nspire™ Software	560
Updating the OS on a Connected Handheld	560
Viewing Software Version and Legal Information	561

Helping Improve the Product	562
Enabling the TI-Nspire™ CX Navigator™ System	563
Appendix A: Conversion Categories and Units	564
General Information	568
Index	570

Getting Started with TI-Nspire™ CX Premium Teacher Software


TI-Nspire™ CX Premium Teacher Software enables teachers to use PC and Mac® computers to perform the same functions as on a handheld. This document covers:

- TI-Nspire™ CX Premium Teacher Software
- TI-Nspire[™] CX CAS Premium Teacher Software

Note: When there are differences between the software, those differences are described.

Selecting the Handheld Type

When you launch the software for the first time, you will see the Handheld Type selection dialog box:

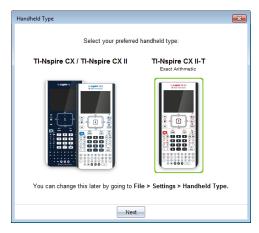

Click the image of the handheld type you want to use then click **Next** to apply that selection and open the software.

To change the handheld type after the first launch:

1. Click File > Settings > Handheld Type and select the type you want.

The Handheld Type confirmation dialog box opens.




2. Click Cancel to continue your work.

Click **Quit Now** to close the software immediately. You will be prompted to save any open documents. When you restart the software, the new handheld type will be applied.

Exploring the Content Workspace

The Content Workspace provides access to folders and files on your local drive, network drives, external drives, to files on connected handhelds, and links to web resources. Teachers can also use this workspace to create and manage lesson bundles.

Note: TI-Nspire[™] CX Student Software users will not see the Content workspace.

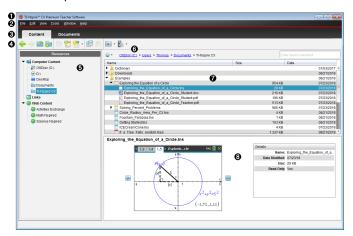

- **Title bar**. Shows the name of the software. The minimise, maximise and close buttons are located in the right corner.
- **Menu bar.** Contains options used to work with files and to modify system settings. In the Content Workspace these are File, Edit, View, Tools, Window and Help.
- **Workspace Selector**. Click these tabs to switch from the Content Workspace to the Documents Workspace.
- ◆ Toolbar. Contains short-cuts to tools used to create folders, save files, create lesson bundles, send files to handhelds and copy/paste. Options available from the toolbar change depending on which workspace is open. In the Content Workspace, the forward and back arrows function as they do in a web browser enabling you to go back and forth between locations.
- **Resources pane**. Enables you to locate and view files on your computer, access web links and access files on connected handhelds. When you select a resource, the details for that resource are displayed in the content pane.
- Navigation bar. Navigate to a location on your computer by clicking an item in the breadcrumb trail. When you select a resource, the options available are specific to that resource.


Content pane. Shows the content for the resource selected. Use the content pane as you would a file manager to locate and view folders, lesson bundles and TI-Nspire™ and PublishView™ documents on your computer or on connected handhelds. Click

to access options applicable to the selected folder or TI-Nspire™ document.

Preview pane. Details about the selected file or folder are displayed in the bottom half of the space.

Exploring the Documents Workspace

Use the Documents Workspace to create or edit TI-Nspire™ and PublishView™ documents and work with applications and problems. The tools in the workspace are specific to working with open documents.

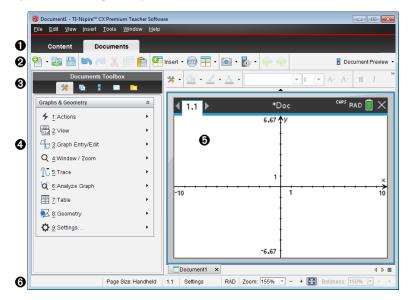

■ Workspace Selector. Click a tab to switch between the Documents Workspace and the Content Workspace.

Note: These tabs are not shown in the TI-Nspire[™] CX Student Software. The Document Workspace is the only available workspace.

- Toolbar. Contains short-cuts to frequently performed tasks such as creating new documents, opening existing documents, saving documents, inserting applications, inserting variables and taking screen captures. The cut, copy and paste icons are also located in the toolbar. At the right side, a **Document Preview** button lets you select Handheld or Computer preview.
- **② Documents Toolbox.** Contains tools needed to work with TI-Nspire™ and PublishView[™] documents. Use these tools to insert applications, use the page sorter to view TI-Nspire™ documents, open the TI-SmartView™ emulator, open Content Explorer, insert utilities such as math templates and the symbols from the Catalogue,

and insert text and images into PublishView™ documents. Click each icon to access the available tools.

- Toolbox pane. Options for the selected tool are displayed in this area. For example, click the Document Tools icon to access tools needed to work with the active application. The tool for configuring questions opens in this space when you insert a question.
- **Work area**. Shows the current page of the active (selected) document. Lets you perform calculations, add applications and add problems and pages. Only one document at a time is active. Multiple documents appear as tabs.
- **Status bar**. Provides information about the active document.

Understanding the Status Bar

The status bar provides information about the current document, and provides options that enable you to toggle between Handheld and Computer view and adjust how the document appears in the work area.



- Page Size. Shows the document's page size as Handheld or Computer. You can use the TI-Nspire™ File menu to convert a document from one page size to the other.
- Problem/Page counter. The first value represents the problem number of the active page, and the second value tells you the page number within the problem. In the example, the counter reads 1.2, indicating Problem 1, Page 2.
- **Settings**. Double-click to view or change the Document Settings for the active document or to change the default Document Settings.
- Mode. Shows the angle mode (RAD, DEG, GRAD) for the current page of the document, or for the active Math Box in a Notes application.
- **5 Zoom**. Enabled in Handheld preview only (click **Document Preview** on the toolbar and select **Handheld**). Click ▼ and select a magnification value for the preview.
- Boldness. Enabled in Computer preview only (click Document Preview on the toolbar and select Computer). Click ▼ and select a value to increase or decrease the boldness of text and other items.

Changing Language

Use this option to select a preferred language. You must restart the software for the language to take effect.

1. Click File > Settings > Change Language.

The Choose a Language dialogue box opens.



- 3. Select the desired language.
- 4. Click Quit Now to close the software immediately. You will be prompted to save any open documents. When you restart the software, the language change is effective.

-or-

Click Quit Later to continue your work. The language change is not applied until you close and restart the software at a later time.

Note: If you select Simplified Chinese or Traditional Chinese as the language in the TI-Nspire[™] software, you should see Chinese characters in the menus and dialogues. If your computer uses the Windows® XP operating system and you do not see Chinese characters, you may need to install the Windows® XP East Asian Language Support package.

Using Software Menu Shortcuts

Use the following software menu shortcuts to perform common functions.

Note: Mac[®] users should substitute \mathcal{H} (Cmd) anywhere Ctrl is used.

Getting Help	
Help	F1
Online Help	F2
Editing Text	
Cut	Ctrl+X
Сору	Ctrl+C
Paste	Ctrl+V
Undo	Ctrl+Z

	Ctrl+Esc	
Redo	Ctrl+Y Shift+Esc	
Toggle approximate and exact results	Ctrl+Enter	
Python Editor and Shell: Add a new line after the current line.		
Inserting Characters and Symbols in a document		
Manual data capture point	Ctrl+.	
Equals symbol	=	
Insert variable	Ctrl+L	
Managing Documents		
Display Document Tools menu	Ctrl+Shift+M	
Open document	Ctrl+O	
Close document	Ctrl+W	
Create new document	Ctrl+N	
Create new PublishView™ document	Ctrl+Shift+N	
Insert new page	Ctrl+I	
Select application	Ctrl+K	
Save current document	Ctrl+S	
Navigation		
Top of page	Ctrl+7	
Python Editor and Shell: Moves cursor to the beginning of the first line in the program.		
End of page	Ctrl+1	
Python Editor and Shell: Moves cursor to the end of the last line in the program.		

Page Up	Ctrl+9
Page Down	Ctrl+3
Up a level in the hierarchy	Ctrl+▲
Down a level in the hierarchy	Ctrl+▼
Extends selection in direction of arrow	Shift+Any arrow
Python Editor and Shell: Indents text on the current line or selected lines or navigates between inline prompts	Tab
Navigating in Documents	
Displays previous page	Ctrl+ ∢
Displays next page	Ctrl+
Displays Page Sorter	Ctrl+▲
Exits Page Sorter	Ctrl+▼
Moves focus backward within page	Shift+Tab
Python Editor and Shell: Dedents text on the current line or selected lines or navigates backwards between inline prompts	
Wizards and Templates	
Add a column to a matrix after the current column	Shift+Enter
Add a row to a matrix after the current row	Enter
Python Editor and Shell: Add a new line after the current line.	
Application-Specific Shortcuts	
Notes/Program Editor/Python Editor: Select all	Ctrl+A
Press-to-Test: Select all items in the dialog	
Program Editor/Python Editor: Check syntax and store	Ctrl+B

Program Editor/Python Editor: Find	Ctrl+F
Geometry/Graph: Hide/Show Entry Line	Ctrl+G
Lists & Spreadsheet/Program Editor/Python Editor: Go To	
Program Editor/Python Editor: Find and Replace	Ctrl+H
Calculator/Program Editor/Python Editor and Shell: Beginning of line	Ctrl+8
Calculator/Program Editor/Python Editor and Shell: End of line	Ctrl+2
Notes: Insert math expression box	Ctrl+M
Notes: Insert chemical equation box	Ctrl+E
Lists & Spreadsheet: Recalculate	Ctrl+R
Program Editor: Check syntax, store program and paste program name in Calculator (after clearing current line in Calculator)	
Python Editor: Check syntax, save program and execute in Python Shell	
Python Shell: Rerun last program	
Geometry/Graphs/Lists & Spreadsheet: Add Function Table	Ctrl+T
Program Editor/Python Editor and Shell: Add/remove comment symbol	
Group/Ungroup applications on a page	Ctrl+4 / Ctrl+6
Miscellaneous	
Handheld Preview	Alt+Shift+H
Computer Preview	Alt+Shift+C
Transfer Tool (Teacher Software only)	Ctrl+Shift+T

Quick Poll (Teacher Software only)	Ctrl+Alt+Q
Capture Class (Teacher Software only)	Ctrl+Shift+R
Capture Page	Ctrl+J
Rename (Content Workspace only)	F2
Print	Ctrl+P
Exit Software	Alt+F4

Using Handheld Keyboard Shortcuts

Use the following handheld emulator keyboard shortcuts to perform common functions.

Getting Help	
Open Hints	ctrl trig
Editing Text	
Cut	ctri X
Сору	ctri C
Paste	ctri V
Undo	ctrl Z ctrl esc
Redo	ctrl Y
Toggle approximate and exact results	ctrl enter
Python Editor and Shell: Add a new line after the current line.	
English: Change key to include appropriate accent Chinese: Insert character	B
Inserting Characters and Symbols in a document	

Display character/symbol palette	ctrl 🕮
Underscore	ctri 🛄
Display math template palette	lot{8
Backslash (\)	û shift ÷
Manual data capture point	ctri .
Clear	ctri dei
Caps Lock	ctrl [::shift]
Store	ctri var
Square brackets	ctri (
Curly brackets	ctri)
Display Trig symbol palette	trig
Equals symbol	=
Display pi symbols palette $(\pi, /, \theta,$ and so on)	π•
Display equality/inequality palette $(>, <, \neq, \leq, \geq, \text{ and })$	ctri =
Display marks and letter symbols palette (? ! $\$$ $^{\circ}$ ' $\%$ " : ; _ \)	?!▶
Square root	ctri x²
log	ctri 10X
In	ctri [e ^x]
ans	ctri (–)
Managing Documents	

Open document menu	docv
Open document	ctri O
Close document	ctri W
Create new document	ctri N
Insert new page	ctrl
Select application	ctrl K
Save current document	ctri S
Navigation	
Top of page	ctri 7
Python Editor and Shell: Moves cursor to the beginning of the first line in the program.	
End of page	ctrl 1
Python Editor and Shell: Moves cursor to the end of the last line in the program.	
Page Up	ctri 9
Page Down	ctri 3
Up a level in the hierarchy	ctrl 🔺
Down a level in the hierarchy	ctrl ▼
Context menu for selection	menu
Extends selection in direction of arrow	⊕shift Any arrow
Python Editor and Shell: Indents text on the current line or selected lines or navigates between inline prompts	tab

Navigating in Documents	
Displays previous page	ctrl •
Displays next page	ctri 🕨
Displays Page Sorter	ctrl 🔺
Exits Page Sorter	ctrl ▼
Switch between applications on a split page	ctrl tab
Moves focus backward within page	⊕ shift tab
Python Editor and Shell: Dedents text on the current line or selected lines or navigates backwards between inline prompts	
Wizards and Templates	
Add a column to a matrix after the current column	ûshift ←J
Add a row to a matrix after the current row	Ţ
Python Editor and Shell: Add a new line after the current line.	
Integration template	⊕r shift +
Derivative template	⊕ shift —
Math template palette	[□[g] Or ctrl □
Fraction template	ctri ÷
Modifying Display	
Increase contrast	ctrl +
Decrease contrast	ctrl —
Power off	ctrl Gi on


Application-Specific Shortcuts	
Notes/Program Editor/Python Editor: Select all	ctri A
Press-to-Test: Select all items in the dialog	
Program Editor/Python Editor: Check syntax and store	ctrl B
Program Editor/Python Editor: Find	ctrl F
Geometry/Graph: Hide/Show Entry Line	ctri G
Lists & Spreadsheet/Program Editor/Python Editor: Go To	
Program Editor/Python Editor: Find and Replace	ctrl H
Calculator/Program Editor/Python Editor and Shell: Beginning of line	ctri 8
Calculator/Program Editor/Python Editor and Shell: End of line	ctri 2
Notes: Insert math expression box	ctrl M
Notes: Insert chemical equation box	ctri E
Open the Scratchpad	
Lists & Spreadsheet: Recalculate	ctri R
Program Editor: Check syntax, store program and paste program name in Calculator (after clearing current line in Calculator)	
Python Editor: Check syntax, save program and execute in Python Shell	
Python Shell: Rerun last program	
Geometry/Graphs/Lists & Spreadsheet: Add Function Table	ctri T
Program Editor/Python Editor and Shell: Add/remove	

comment symbol	
Group/Ungroup applications on a page	ctri 4 / ctri 6

Using the Content Workspace

The Content Workspace provides access and navigation to folders and files stored on your computer, network, and external drives, allowing you to open, copy, and transfer files to students.


Exploring the Content Workspace

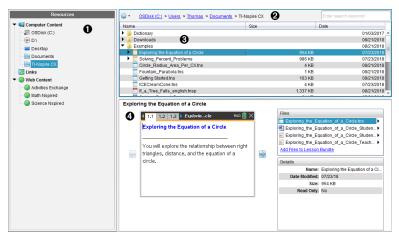

- Resources pane. Select content here. You can select folders and shortcuts on your computer, network drives, external drives, or web content. If you are using software that supports TI-Nspire™ CX handhelds, the Connected Handhelds heading is visible when handhelds are connected.
 - **Note:** You can add new links to your favourite Web sites in the Links section. You can access these new links in the Content pane. New links may not be added to the Web content section.
- Navigation bar. Navigate to any location on your computer by clicking an item in the breadcrumb trail. When you select a resource, the options shown are specific to that resource.
- Content pane. By default, the folders on your desktop are displayed. Use this space to locate and view files on your computer. You can locate and access files on a connected handheld if using software that supports handhelds. Use the top half of the space as you would a file manager. The Content pane is able to display the contents of only one selected item at a time. Avoid selecting more than one item at a time.
- Preview pane. Shows details about the selected file or folder.

Exploring the Resources Pane

Use the **Resources** pane to locate documents on a computer, access web content, and communicate with connected handhelds if using TI-Nspire™ software that supports connected handhelds.

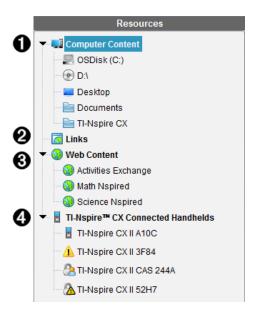

- Computer Content. Enables navigation to all files on a computer, network drives and external drives. Computer Content expands and collapses to provide access to the following default shortcuts:
 - Local Disk
 - External drives
 - Network drives
 - Desktop
 - Documents or My Documents

When you select an item in Computer Content, the file structure appears in the Content pane. When you select a folder or supported file, the detail is displayed in the Preview pane.

- Links. By default, links to Texas Instruments sites are listed. When you click Links, it shows a list of links in the Content pane. Then when you click a link there, it launches in your web browser. You can add your own links to this section. Links from the latest version of the TI-Nspire™ software are added when you upgrade.
 - Users located in the United States can search US standards or textbooks by selecting the search option from Links.
- Web Content. Lists links to Texas Instruments sites that contain TI-Nspire™supported activities. Web Content is available if you are connected to the Internet. You can save material you find on these sites to your computer and share items through the Computer Content pane or Connected Handhelds if using software that supports handhelds. You cannot save links to websites in the Web Content section.

Note: The web content that is available varies depending on region. If there is no online content, this section is not visible in the Resources pane.

When you select an item in Web Content, the list of activities is displayed in the Content pane and a preview of the selected activity is displayed in the Preview pane.

TI-Nspire™ CX Connected Handhelds. Lists information about the handhelds connected to your computer. To see folders and files on a specific handheld, click its name.


Each handheld name is shown with a status icon:

- A logged-in symbol () indicates that a student is logged in to the handheld and the handheld is not in Press-to-Test mode.
- A padlock symbol () Shows that the handheld has been placed in Press-to-Test mode by the Prepare Handhelds command. If the padlock is combined with a warning symbol (1/14), the handheld is in Press-to-Test mode but was not placed in that mode by the Prepare Handhelds command.
- A single warning symbol (1) indicates that the version of the handheld OS does not match the teacher's software version.

To open a tooltip containing status details, hover the mouse pointer over the status icon.

Note: Connected Handhelds are not shown if there are no handhelds connected.

Using the Preview Pane

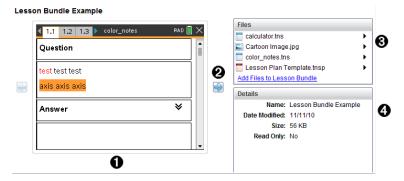

A thumbnail preview of the selected folder, .tns file, file-type icon, or lesson bundle. Double-click a file-type icon to open the file in its associated application.

Note: If a lesson bundle is empty and this space is blank, you have the option to add files.

If a TI-Nspire[™] document has multiple pages, use the forward arrow bto

preview the next page. The backward arrow becomes active so you can move backward through the pages. If working with a lesson bundle, you can choose to preview a TI-Nspire[™] document within the bundle by this method.

- If a lesson bundle is selected, the Files dialogue box opens above the Details Ø window listing the files in the lesson bundle. Double-click any file in a lesson bundle to open the file in its associated application.
- If a folder is selected, the **Details** window shows the name of the folder, the **4** path where the folder is located, and the date modified.

For document files and lesson bundle files, the **Details** window shows the name, the date the file was modified, the file size, and whether or not the file is read only.

Accessing Computer Content

Computer Content provides access to all information stored on your computer, network, and external drives.

Using the Navigation bar

The Content pane Navigation bar provides tools needed to locate folders and files.



- a Options. Click v to open the menu to access options for working with files and folders.
- **Current path**: Contains a clickable breadcrumb trail of the current location. Click a breadcrumb to navigate to any section in the path.
- **Search**. Enter a search keyword and press **Enter** to find all files within the selected folder containing that word.

Filtering Computer Content

Use this filtering option for easy access and selection of your teaching content. You can select show TI-Nspire[™] content only or to show all content.

- 1. Select a folder in Computer Content in the Resources pane.
- 2. From the Menu bar, select View > Filter by.
- 3. Choose one of the following options.
 - Show TI-Nspire™ content only
 - Show all content

Mapping a Network Drive

Complete the following steps to map a network drive.

1. Select Computer Content from the Resources list.

2. Click , and then click Create Shortcut.

The Add Shortcut location to Content dialogue box opens.



Click Browse.

Note: You can also type the full path name for the network drive.

The Select Shortcut Folder dialogue box opens.



- 4. Navigate to the network drive.
- Click Select.
- 6. Click Add Location.

The Please enter network drive credentials dialogue box opens.



7. Type the username and password given to you by your system administrator.

8. Click Accept.


The network drive is added to the list of folders under the Computer Content heading in the Resources pane.

Accessing a Secured Network Drive

If access to a network drive requires authentication, complete the following steps to access secured network.

1. Click the drive you want to access in the Resources pane.

The Please enter network drive credentials dialogue box opens.

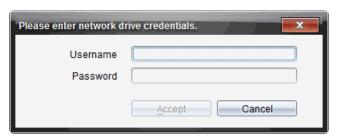

- Type your username and password.
- 3. Click Accept.

Using Shortcuts

Use this option to add folders or lesson bundles containing frequently used files to the Computer Content list.

Adding a Shortcut

To add a shortcut to a folder containing files you access often:

Navigate to the folder where the files are located.



2. . and then click Create Shortcut.

The folder is added to the list of folders under Computer Content in the Resources pane.

Deleting a Shortcut

To delete a shortcut:

- 1. From the Computer Content list, select the folder to be deleted.
- 2. Right-click the selected folder, and then click Remove Shortcut.

The folder is removed from the list of shortcuts.

Note: You cannot remove default shortcuts.


Working with Links

By default, the Links list contains a list of links to Texas Instruments websites. Click a link to launch your web browser and access the website.

Using the Links Toolbar

When you select Links in the Resources pane, the tools on the navigation bar are specific to working with links. Use these tools to add, edit, or delete links from the list. You can also move a link up or down in the list.



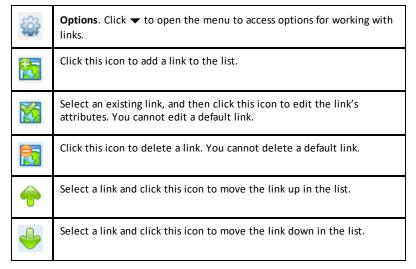


Adding a Link

Complete the following steps to add a link to the list of Links in the Resource pane.



. CITCK

The Add Link dialogue box opens.

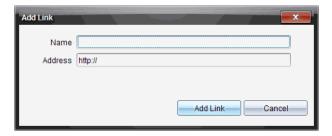

- 2. Type the name of the link.
- 3. Type the URL in the Address field.
- 4. Click Add Link.

The link is added to the bottom of the list of existing links.

Editing an Existing Link

Complete the following steps to edit an existing link.

1. Select the link you want to change.



The Edit Link dialogue box opens.



- 3. Make needed changes to the name of the link or to the URL.
- 4. Click Edit Link.

The changes are applied to the link.

Removing a Link

Complete the following steps to delete a link.

1. Select the link you want to delete.



The confirmation dialogue box opens.

Click Remove.

The link is removed from the list.

Note: You cannot delete a default link.

Moving Links Up or Down in the List

You can change the order of the links in the list to suit your needs.



to move a selected link up one place in the list.




Click to move a selected link down one place in the link.

- Click , and then select Move to Top of List to relocate a selected link to the top of the list.
- Click , and then select Move to Bottom of List to relocate a selected link to the bottom of the list.

Using Web Content

Web Content provides links to online materials on Texas Instruments websites. You can save material found on these websites to your computer and share them using the Computer Content pane and Connected Handhelds.

Information provided for each activity includes the name of the activity, the author, the date the activity was posted, the size of the file, and the source.

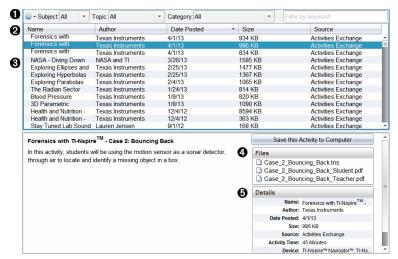

- Navigation toolbar.
- Column headings.
- A List of available activities.
- List of the files contained in the activity.
- Details about the selected activity. ล

Note: An Internet connection is required to access Texas Instruments websites.

Sorting the List of Activities

Use the column headings to sort the information in the list of activities. By default the list is displayed in alphabetical order by Name.

- Click the Name heading to list activities in reverse alphabetical order. Click the heading again to return to A to Z order.
- Click the Author heading to list the activities in alphabetical order by author name.
- Click the Date Posted heading to list the activities in order from newest to oldest or from oldest to newest.
- Click the Size heading to list the activities according to file size.
- Click the Source heading to list the activities in order by source.
- Right-click the column heading row to customize displayed column headings.

Filtering the List of Activities

By default, all available activities are listed in the Content pane. Options on the Navigation bar enable you to filter the activities by subject, topic, and category. You can also search for an activity using a keyword search.

To find all activities related to a particular subject:

- In the Subject field, click ▼ to open the drop-down list.
- 2. Select a subject.

All activities related to the selected subject are listed.

- 3. To narrow the search, click ▼ in the Topic field to view and select a topic related to the subject selected.
- 4. Use the Category field to narrow the search even further. Click ▼ to select a category related to the selected subject and topic.

Using Keywords to Search for an Activity

Complete the following steps to search for an activity using a keyword or phrase.

- 1. Type a keyword or phrase in the Filter by Keyword field.
- 2. Press Enter.


All activities that contain the keyword or phrase are listed.

Opening an Activity

- 1. Select the activity you want to open.
- 2. Click , and then select **Open**.

The Open Activity dialogue box opens with a list of all documents related to the selected activity.

You can open a .tns or .tsnp file in the TI-Nspire™ software. Other files such as Microsoft® Word and Adobe® PDF files open in their respective applications.

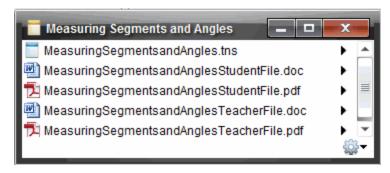

- 3. Select the file and click , and then select Open.
 - The .tns file opens in the Documents Workspace.
 - The .doc or .pdf file opens in its associated application.

Saving an Activity to Your Computer

Complete the following steps to save an activity to your computer.

 Select the activity you want to save. The file details are displayed in the bottom half of the window.



2. Click Save this Activity to Computer in Preview pane, above Files.

Note: You can also right-click on the selected activity and choose Save to Computer.

The Save Selected files dialogue box opens.

- 3. Navigate to the folder where you want to save the file.
- Click Save.

The activity is saved to your computer as a lesson bundle.

Copying an Activity

Complete the following steps to copy an activity. Once the activity is copied to the Clipboard, you can paste the activity into a folder on your computer, and then drag the activity to your list of shortcuts in the Local Content pane.

- 1. Click the activity you want to copy to select it.
- 2. Use one of the following methods to copy the activity to the Clipboard:
 - Select the activity and drag it to a folder in the Local Content list.
 - Click ⁽²⁾, and then click **Copy**.
 - Right-click on a file in the Files list, and then click Copy.
 - Click (Copy icon), which is located in the toolbar.

The activity is copied to the Clipboard.

Open a folder on your computer, and then click Edit > Paste to copy the activity to the selected folder.

Working with Connected Handhelds

The TI-Nspire™ software enables you to view content, manage files, and install operating system updates on handhelds connected to the computer.


To use the features described in this chapter, handhelds must be turned on and connected by one of these means:

- TI-Nspire™ Docking Station or TI-Nspire™ CX Docking Station
- TI-Nspire[™] Navigator[™] Cradle and access point
- TI-Nspire™ CX Wireless Network Adapter and access point
- TI-Nspire™ CX Wireless Network Adapter v2 and access point
- A direct connection through a standard USB cable

Note: The tasks in this section can only be performed using TI-Nspire™ handhelds. In order to enable wireless connectivity, the TI-Nspire™ Premium Teacher Software and the OS installed on the TI-Nspire™ CX II handhelds must be version 5.0 or later. For TI-Nspire™ CX handhelds, the OS must be version 4.0 or later.

Viewing Content on Connected Handhelds

When you select a handheld in the Resources pane in the Content Workspace, all files and folders on the handheld appear in the Content pane. To preview the document contents, select **Click here to preview document** in the Preview pane.

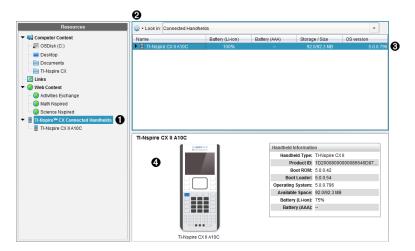

TI-Nspire™ CX Connected Handhelds - Lists all handhelds that are connected and turned on.

Note: A warning symbol next to the handheld name indicates that the OS installed on the handheld does not match the software version installed on the computer and that an OS update is needed.

- **Options** Available options vary depending on the task you select under Resources.
- **3** Content pane When Connected Handhelds is selected, the Content pane shows details about handhelds that are connected and turned on:
 - Name
 - Battery (Li-ion) Li-ion (rechargeable) battery charge (Critical 2%, 25%, 50%, 75%, 100%, or "--" to indicate no battery is present).
 - Battery (AAA) AAA battery charge (Critical 2%, 25%, 50%, 75%, 100%, or "--" to indicate no battery is present).
 - Storage Size
 - OS Version
- Preview pane Provides information on a handheld when you click Connected Handhelds in the Resources pane and then a handheld in the Content pane. If you select a TI-Nspire™ file in the Content pane, the Preview pane shows a preview available for that file.
 - Handheld Type: Names of handhelds.
 - Product ID: Handheld product identification.
 - Boot ROM: Internal bootstrap that performs lower level operation for booting up device.
 - Boot Loader: External bootstrap that performs lower level operation for booting up device.
 - Operating System: The operating system in use.
 - Available Space: The amount of space left and available on the handheld.
 - Battery (Li-ion) Li-ion (rechargeable) battery charge (Critical 2%, 25%, 50%, 75%. 100%. or "--" to indicate no battery is present).
 - Battery (AAA) AAA battery charge (Critical 2%, 25%, 50%, 75%, 100%, or "--" to indicate no battery is present).

When you select a handheld, all files and folders on the handheld appear in the Content pane. When a file or folder is selected, the details are displayed in the Preview pane. Click the icon to preview the document.



Details about the selected folder or file are shown in the Preview pane.




Details for selected folder



Details for selected file

- ► To view the files in a folder, double-click the folder name in the Content pane. The files in the folder are listed in the Content pane.
- To preview the contents of a .tns file, select Click here to preview document in the Preview pane.

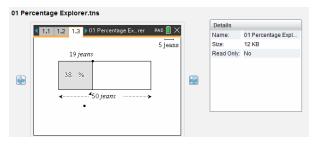

Managing Files on a Connected Handheld

When working with files on connected handhelds in the Content Workspace, use the Options menu or the context menu to manage files.

Option	How it Works
Open	Open a file on a connected handheld:
	Click the file you want to open.
	Click Open . The document opens in the Documents Workspace.
Save to Computer	Save a copy of the selected file on your computer.
	Click the file you want to save.
	Click Save to Computer. The Save Select File dialogue box opens.

Option	How it Works
	Navigate to the folder where you want to save the file.
	• Click Save.
Copy/Paste	Create a copy of a file:
	 Click the file you want to copy.
	 Click Options > Copy to copy the file to the Clipboard.
	 To paste the file in another location, navigate to the new location and then click Options > Paste.
	Note : If you don't select a new location, the copied file is pasted with a new name "Copy of"
Delete	Delete a file on a connected handheld:
	 Click the file you want to delete.
	Click Delete.
	Click Yes when the Warning dialogue box opens. Click No to cancel.
Refresh	To refresh the list of files, click Options > Refresh .
Rename	To rename a file on a connected handheld:
	Click the file you want to rename.
	• Click Rename.
	• Type the new name and press Enter .
Up a Level	Go up a level in the folder hierarchy. This option is available when you select a file inside a folder.
New Folder	Create a new folder:
	Click New Folder.
	Type a name for the new folder.
	Press Enter.

Opening Documents on Connected Handhelds

To open a document on a connected handheld in the TI-Nspire™ software:

- 1. Ensure the handheld is connected to your computer.
- to open Content Explorer.

The connected handheld name is listed in the Connected Handhelds pane.

3. Double-click the handheld name.

The folders and documents on the handheld are listed.

4. Navigate to the document you want to open, and then double-click the file name.

The document opens in the Documents Workspace work area.

Saving Files to a Connected Handheld

When you save a file from your computer to a handheld, files are converted to TI-Nspire[™] documents (.tns files). To save a file on your computer to a connected handheld:

- 1. Ensure the handheld is connected to your computer.
- to open Content Explorer. 2. Click

The folders and files on your computer are listed in the Computer pane.

- 3. Navigate to the folder or file you want to save to the handheld.
- 4. Click the file to select it.
- 5. Drag the file to a connected handheld listed in the Connected Handheld pane.

The file is saved to the connected handheld.

Note: To save the file in a folder on the handheld, double-click the handheld name to list the folders and files, and then drag the file to a folder on the handheld.

If the file already exists on the handheld, a dialogue box opens asking if you want to replace the file. Click Replace to overwrite the existing file. Click No or Cancel to abandon the save.

Sendina Files to Handhelds

You can transfer activities, folders, lesson bundles and supported files from a computer to connected handhelds, from one connected handheld to another or from one connected handheld to all connected handhelds.

Items you can transfer include:

- Folders
- Supported files
 - .tcc
 - .tco
 - .tcc2
 - .tco2
 - .tilb
 - .tns

Sending an Activity to a Connected Handheld

In the Content Workspace, you can send an activity from the Web Content link to connected handhelds.

- 1. Use the Workspace selector to select the Content Workspace.
- 2. Click Web Content in the Resources pane.

- 3. Click the activity you want to send to connected handhelds.
- 4. Use one of the following options to send the file to the selected handhelds:
 - Drag the file to the Selected Handhelds label to transfer to the file to all
 connected handhelds. To transfer the file to a specific handheld, drag the file to
 a specific handheld name.
 - To transfer the file using Transfer Tool:

Note: You cannot use the Transfer Tool to transfer files to handhelds while a class is in session.

5. From the toolbar, click and then select Send to Connected Handhelds.

-or-

Click , and then select Send to Connected Handhelds.

The Transfer Tool opens.



Select the file, and then click Start Transfer.

The selected files and folders are transferred to the selected handhelds.

7. When the transfer is complete, close the Transfer Tool.

Sending Files to all Connected Handhelds


You can send a file to all connected handhelds when a class is not in session. To transfer files or folders from a connected handheld or from the computer to all connected handhelds, complete the following steps:

- 1. Use the Workspace selector to select the Content Workspace.
- 2. Select the files or folders you want to transfer from the Resources pane.

Note: You can choose files from Computer Content, Web Content, or Connected Handhelds.

3. Click , and then click Send to Connected Handhelds.

The Transfer Tool window opens.

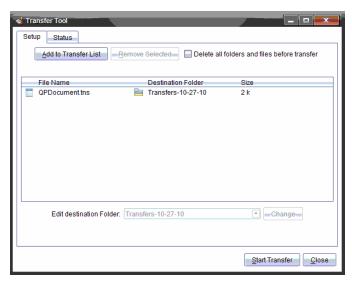

Click Start Transfer.

Note: To add additional files to the transfer list, click Add to Transfer List.

The selected files and folders are transferred to the connected handhelds. By default, the files are transferred to a folder on the handheld titled *Transfers-mm-dd-yy*.

Transferring Files Between Handhelds

If multiple handhelds are connected, you can send a folder or file from one handheld to another handheld in the Connected Handhelds list in the Resources pane.

- Use the Workspace selector to select the Content Workspace.
- 2. In the Resources pane, click the handheld that contains the files you want to transfer. The files on the handheld are listed in the Content pane.

- 3. Click the folder or file you want to send.
- 4. Drag the file to another handheld in the Connected Handhelds list.

Note: You can also copy and paste a file from one handheld to another.

Preparing Handhelds Remotely

TI-Nspire™ Premium Teacher Software lets you change settings on connected handhelds from your computer. The handhelds can be connected through wired or wireless connections.

You don't need to start a class session or require students to log in. You can perform these operations while other transfer activities, such as Quick Poll or Live Presenter, are in progress.

Clearing the Scratchpad

This removes all Scratchpad data from the connected handhelds, including the Scratchpad Calculator pages and Graphs & Geometry pages, the Scratchpad history and variables, and the contents of each handheld's clipboard. The handhelds can be in or out of Press-to-Test mode.

WARNING: This action clears the Scratchpad and Clipboard data from *all currently connected handhelds*. You cannot limit it to a selected set of handhelds.

1. From the Tools menu, select Prepare Handhelds > Clear Scratchpad.

A Clear Scratchpad confirmation message appears.

2. To proceed, click Clear Scratchpad.

A status log reports the progress. A notification message appears on each handheld.

Configuring Document Settings

This lets you apply document settings, such as Angle unit and Calculation Mode, to the connected handhelds. It gives you a quick way to put all the handhelds into a known state. You can choose to save configurations for reuse. The handhelds can be in or out of Press-to-Test mode.


Note: The document settings are applied immediately to handheld Scratchpads and are saved as defaults for the Scratchpad and all new documents. Existing documents, whether open or closed, retain their prior settings.

1. From the Tools menu, select Prepare Handhelds > Set Default Document Settings.

The Document Settings dialogue box opens, showing the setting that will be applied.

- 2. Click each option that you want to change, and select the desired setting.
 - To apply a previously saved configuration, click the Saved Configuration list, and select the configuration.
 - To restore factory default settings, click the Saved Configuration list, and select
 TI Factory Default.
- (Optional) To save the current settings as a named configuration, click Save, type a Name into the Save Configuration dialogue box, and click Save.
- 4. Click Send.

A notification message appears on each handheld, and a status log reports errors and warnings to the teacher. Click **Done** to close the log.

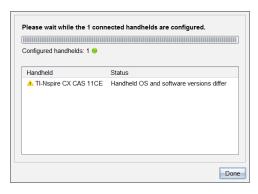

Entering Press-to-Test Mode on the Handhelds

This lets you start a Press-to-Test session on the connected handhelds and apply the same set of restrictions to each by choosing them from a dialogue and optionally saving the configurations for reuse. Or you can enter a Test Code that contains a predefined set of restrictions.

WARNING: All currently connected handhelds will restart, including any handhelds that are already in a Press-to-Test session. You cannot limit this action to a selected set of handhelds.

Choosing Test Mode Restrictions

 From the Tools menu select Prepare Handhelds > Send Press-to-Test > Choose Test Mode Restrictions. The Press-to-Test Configuration dialogue box opens, showing the restrictions that will be applied.

2. Click the tick box for each restriction to select or deselect it.

In the Test Code section, the code will automatically update based on your selections.

- 3. (Optional) To save the current settings as a named configuration, click Save, type a Name into the Save Configuration dialogue box, and click Save.
- 4. Click Send Press-to-Test.

A warning message lists the effects of entering a Press-to-Test session.

5. To proceed, click Enter Press-to-Test.

Entering a Test Code

To enter a test code, you can use one provided to you, or one generated using the above method.

1. From the Tools menu select Prepare Handhelds > Send Press-to-Test > Enter Test Code.

The Press-to-Test Configuration dialogue box opens showing the most recent test code, or blanks if it is your first-ever session.

Enter a test code in the numeric boxes.


The test code will be validated as you enter each of the eight numbers and will display a message accordingly. You will not be able to start Press-to-Test without a valid test code.

- 3. (Optional) To save the current test code as a named configuration, click Save, type a Name into the Save Configuration dialogue box, and click Save.
- 4. Click Next.

The Press-to-Test Configuration dialogue box opens showing the valid test code, the angle setting, CAS mode, and a list of the restrictions.

Click Send Press-to-Test.

Each handheld preserves its current files and settings and then restarts in Press-to-Test mode. A status log reports errors and warnings to the teacher. Click Done to close the log.

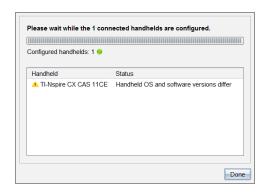

Exiting Press-to-Test mode

This closes the Press-to-Test session on the connected handhelds and restarts them.

WARNING: All currently connected handhelds will exit Press-to-Test and restart. All data and files created while in Press-to-Test will be deleted. You cannot limit this action to a selected set of handhelds.

- 1. Notify the students that you are about to close the Press-to-Test session on their handhelds
- 2. From the Tools menu, select Prepare Handhelds > Exit Press-to-Test.

A warning message lists the effects of exiting a Press-to-Test session.


3. To proceed, click Exit Press-to-Test.

A status log reports the progress. Each handheld restarts with its previous files and settings restored.


Checking for an OS Update

When handhelds are connected, you can check for OS updates from the Content Workspace or from the Documents Workspace.

- 1. Show all connected handhelds.
 - In the Content Workspace, click Connected Handhelds in the Resources pane.
 - In the Documents Workspace, open the Content Explorer and click Connected Handhelds.
- 2. Click the handheld you want to check, and then right-click and select Check for OS Update.
 - If the operating system is current, the Check for Handheld OS Update dialogue box opens indicating that the operating system on the handheld is current.

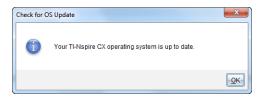

 If the operating system is not current, the TI-Nspire™ software prompts you to install the latest OS now, with the option to download the OS to your computer.



Click Close to close the dialogue box, or click Continue and follow the prompts to install the OS on the handheld.

Installing an OS Update

Note: To avoid losing unsaved data, close all documents on the handheld before updating its operating system (OS). Updating the OS does not replace or remove previously saved documents.

The OS on a new handheld comes bundled with the installer, which places the OS in a default location such as: C:\mydocuments\TI-Nspire\downloads.

Go to education.ti.com/latest to download the latest OS files.

Note: You can install OS updates on connected handhelds from the Content Workspace at any time.

Updating the OS on a Single Handheld

- 1. Ensure that your computer is connected to the internet.
- Show all connected handhelds by clicking the arrow next to TI-Nspire™ Connected Handhelds in the Resources pane.




Note: An attention ! symbol next to a handheld name means:

The handheld needs an OS update.

The handheld has a newer OS than the teacher's.

- 3. Hover your mouse over the TI-Nspire™ handheld you want to update, and then right-click.
- 4. Click Check for OS Update.

The Check for OS Update dialogue box opens.

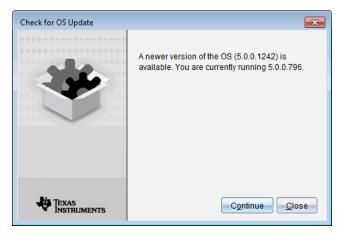

5. Click Close to cancel the installation, or click Continue and follow the prompts to install the OS on the handheld.


When the update is complete, the handheld restarts automatically.

Updating the OS on Multiple Handhelds

Note: To avoid losing unsaved data, close all documents on the handheld before updating its operating system (OS). Updating the OS does not replace or remove previously saved documents.


- Click **TI-Nspire™ Connected Handhelds** in the Resources pane.
- Select all handhelds you want to update in the Content Pane.
- Click Tools > Install OS.

The OS Installation dialogue box opens.

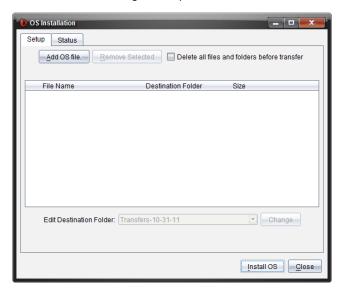

Click Add OS file.

The Add to Transfer List dialogue box opens.

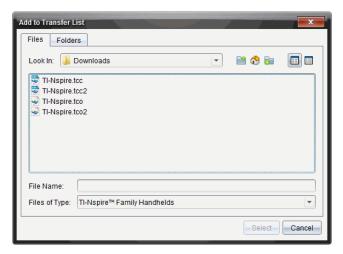

- 5. Select the applicable OS files.
 - To upgrade a TI-Nspire™ CX handheld, select TI-Nspire.tco.
 - To upgrade a TI-Nspire™ CX CAS handheld, select TI-Nspire.tcc.

- To upgrade a TI-Nspire™ CX II handheld, select TI-Nspire.tco2.
- To upgrade a TI-Nspire™ CX II CAS handheld, select TI-Nspire.tcc2.
- To upgrade a TI-Nspire™ CX II-T handheld, select TI-Nspire.tct2.

6. Click Select.

The OS Installation redisplays with your selected OS files.

7. Click Install OS.

The OS version information updates, and the Select OS Handheld File dialogue redisplays for further selection.

Renaming Handhelds

You can rename the handhelds from the Content Workspace.

Note: Renaming a handheld does not affect student login information.

- Right-click the handheld name in the Content pane.
- 2. Click Rename.
- Type the new name.
- 4. Press **Enter** to go to the next name to change.



5. To exit the Edit mode, click an area of the screen outside the handheld names. You will also leave the Edit mode after you press **Enter** on the last name you edit.

Using Identify Selected to Locate Handhelds

If you are using the TI-Nspire™ Docking Station or the TI-Nspire™ CX Docking Station, use this feature to locate handhelds.

- 1. Be sure that the handhelds are turned on and that the docking station is connected to your computer.
- 2. Use the Workspace selector to select the Content Workspace.
- Click **Tools** > **Identify Selected** or right-click the handheld name in the Content pane.

Both LED lights on the docking s will blink for 30 seconds.	tation under	the slot wher	e the handhe	eld is located

Using the Transfer Tool

When a class is not in session, you can transfer files or folders containing files from your computer to connected TI-Nspire™ handhelds using the Transfer Tool. With the Transfer Tool, you can transfer one or more files or documents to one or more handhelds without requiring students to log in.

Files	File Extensions
Operating systems (OS)	.tcc (TI-Nspire™ CX CAS handhelds) .tco (TI-Nspire™ CX handhelds) .tcc2 (TI-Nspire™ CX II CAS handhelds) .tco2 (TI-Nspire™ CX II handhelds) .tct2 (TI-Nspire™ CX II-T handhelds)
Documents	.tilb (TI-Nspire™ Lesson Bundle) .tns (TI-Nspire™ document)

Notes:


You can transfer more than one operating system file at a time; however, you can
only transfer one operating system file with the same file extension at a time. For
example, you can transfer a .tcc and a .tco file at the same time, but only one .tcc
file at that time.

Transfer Tool Interface

The Transfer Tool dialogue box contains a Setup tab and a Status tab.

Setup Tab

The Setup tab allows you to select files to transfer and a destination folder.

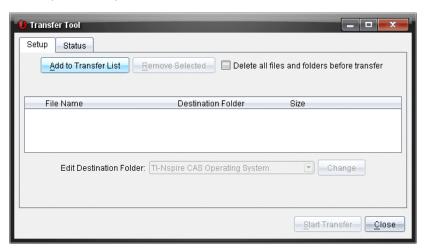


The Setup tab includes the following features:

Feature	Description
Add to Transfer List	Click to add files or folders with files to the Transfer List. The Transfer List displays the File Name (or folder name), the Destination Folder, and the Size (in KB) of the file or folder you want to transfer.
Remove Selected	Click to remove selected files and folders from the Transfer List. This option becomes active when you add files to the Transfer List.
Delete all files and folders before transfer	Select to clear all files and folders on a handheld before a file transfer.
Edit Destination Folder	Select to change the destination folder for the files you want to transfer.

Status Tab

The Status tab is only active when a transfer is in progress.

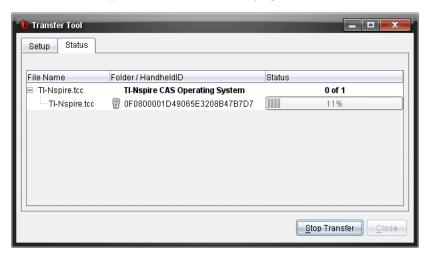

When you start a transfer, the Transfer Tool automatically switches to the Status tab. The Status tab allows you to view the progress and status of files as they transfer and provides the following information:

Information	Description
File Name	Indicates the file name and extension.
Folder/Handheld	Indicates the destination folder and the handheld ID.

Information	Description
ID	
Status	Indicates the completion status, the progress bar, or any error message. Error messages include:
	Low battery
	Wrong handheld type
	Memory full
	Lost connectivity

Notes:

- If no transfers are active, the following message is displayed: "No transfers are active. Use the Setup tab to configure and start the transfer."
- During a transfer, no options are available on the Setup tab.

Opening the Transfer Tool

Before you can use the Transfer Tool, you must end any running class sessions.

To open the Transfer Tool, use one of these methods:

- Click Tools > Transfer Tool.
- Click and then select **Send to Connected Handhelds**.

The Transfer Tool opens the Setup tab.

Adding Files or Folders to the Transfer List


You must add files or folders to the Transfer List before you can start a transfer.

Note: You can only add a folder that contains files to the Transfer List.

To add files or folders to the Transfer List:

1. In the Transfer Tool dialogue box, click Add to Transfer List.


The Add to Transfer List dialogue box opens.

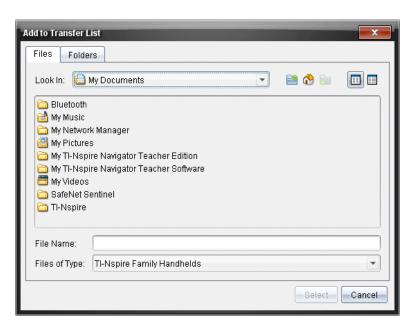

- 2. To add files to the Transfer List, navigate to the folder or folders that contain the files you want to transfer.
- 3. Click Select to add highlighted files to the Transfer list.
 - On the Files tab, you can see both files and folders, but you cannot select folders. You must drill down and select a file.
 - To select multiple files within a folder, press and hold the Ctrl key (Mac®: X) while selecting files.
- 4. To add folders containing files, click the Folders tab and navigate to the folder you want to select.
- 5. Click Select to add the highlighted folders.

Note: To select multiple folders, press and hold the **Ctrl** key (Mac[®]: **光**) while selecting folders.

Selected files and folders are displayed in the Transfer Tool dialogue box.

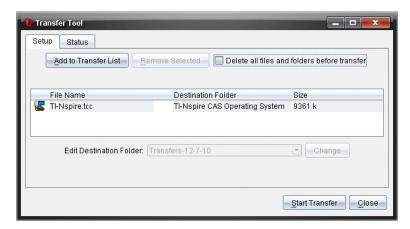

Note: You can only add one operating system file type to the Transfer List. If you attempt to add more than one operating system file type, the following error message is displayed.




Removing Files or Folders from the Transfer List

You can remove files or folders that you no longer want to transfer.

To remove files or folders from the Transfer List, complete the following steps:

1. In the Transfer Tool dialogue box, select files or folders you want to remove.

Note: To select multiple files or folders, press and hold the Ctrl key (Mac®: 光) while selecting each file or folder.

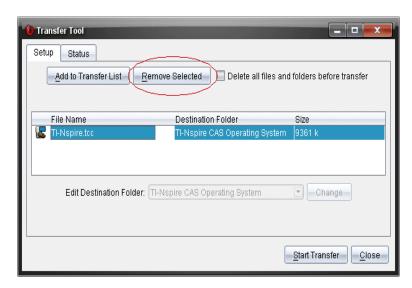

2. Click Remove Selected.

The files or folders are removed from the Transfer List.


Editing the Destination Folder

Except for an operating system file, you can change the destination folder for any file or folder in the Transfer List.

By default, the Transfer Tool creates the destination folder "Transfer-date." The date format is based on the user's preferred language setting and location. For example, the default date format for the United States is mm-dd-yy. If you change your preferred language setting, this default date format changes.

To change the destination folder:

- 1. Click a file or folder.
- 2. Complete one of the following actions:
 - From the Edit Destination Folder drop-down list, select the top level folder for any available handheld or any available folder.
 - In the Edit Destination Folder drop-down list, type a new destination folder name.

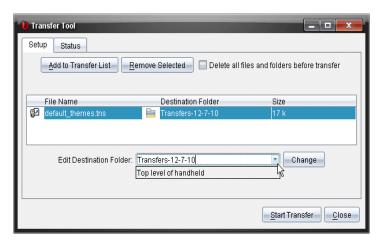

Note: Folder names can contain alphanumeric characters and can include slashes (/ and \backslash). You cannot use double slashes (// and $\backslash\backslash$) and these special characters (? |: *"" <> |).

3. Click Change.

The destination folder in the Transfer List changes for the files or folders you selected.


Deleting All Handheld Files and Folders

You can use the Transfer Tool to delete all files and folders on a connected handheld. Use this feature to delete existing files and folders to ensure that only the files you want students to work with are on the handhelds.

By default, the Transfer Tool disables this setting. If selected, the new setting becomes the default the next time you open Transfer Tool.

To delete all files and folders from a connected handheld:

In the Transfer Tool dialogue box, select Delete all files and folders before transfer.

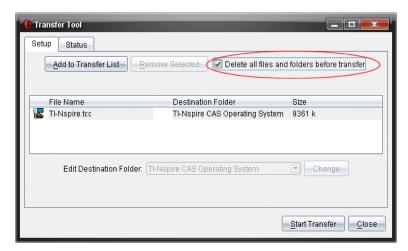

2. Click Start Transfer.

The Confirm dialogue box opens.



Click Yes.

The Transfer Tools displays the Status tab. This tab displays the status and progress as files are deleted.

Starting a Transfer

After you have added all files and folders to the Transfer List and selected other options as necessary, you can start the transfer. You can transfer operating system files and documents at the same time.

To start a transfer:

1. Connect one or more TI-Nspire[™] handhelds.

If handhelds are not connected, the Status tab indicates "No Active Connected Handhelds" when you start a transfer.

- 2. From the Resources pane, complete one of the following actions:
 - To transfer files to one or more TI-Nspire™ handhelds, select the individual handhelds.
 - To transfer files to all connected TI-Nspire™ handhelds, select Connected Handhelds (top level).

3. In the Transfer Tool dialogue box, click Start Transfer.

The Transfer Tool dialogue box switches to the Status tab and displays the transfer information.

- The progress bar disappears when a transfer is complete.
- During a transfer, the Transfer Tool indicates which handhelds are connected and successfully received files.
- If a handheld disconnects and then reconnects during a transfer, the Transfer Tool indicates the status of completed transfers, and resumes transferring other files as necessary.

Stopping File Transfers

You can stop a file transfer at any time.

To stop a file transfer:

1. In the Transfer Tool, click **Stop Transfer**.

The Confirm dialogue box opens.



Click Yes.

The Transfer Tool stops transferring and displays the **Setup** tab.

- If a connected handheld has already received files, those files remain on the handhelds.
- Files remain in the **Setup** tab until you close the Transfer Tool, or until you delete them.

Closing the Transfer Tool


When you have completed transferring files and folders, close the Transfer Tool.

- To close the Transfer Tool, click Close.
 - You cannot close the Transfer Tool if a transfer is active.
 - When closed, the Transfer Tool clears files and folders you added to the Transfer List.
 - When closed, the Transfer Tool keeps the last Delete all files and folders before transfer setting.

Using the Documents Workspace

Use this workspace to create, modify, and view TI-Nspire™ and PublishView™ documents, and to demonstrate mathematical concepts.


Exploring the Documents Workspace

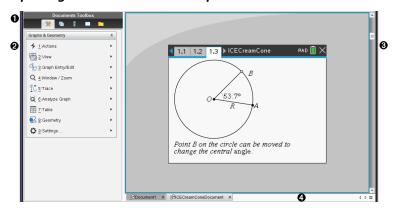

- Documents Toolbox. Contains tools such as the Document Tools menu, Page Sorter, TI-SmartView™ emulator, Utilities, and Content Explorer. Click each icon to access the available tools. When you are working in a TI-Nspire™ document, the tools available are specific to that document. When you are working in a PublishView™ document, the tools are specific to that document type.
- **Toolbox pane**. Options for the selected tool are displayed in this area. For example, click the Document Tools icon to access tools needed to work with the active application.
 - **Note:** In the TI-Nspire[™] CX Premium Teacher Software, the tool for configuring guestions opens in this space when you insert a guestion. For more information, see Using Question in the Teacher Software.
- **Work area**. Shows the current document and enables you to perform calculations, add applications and add pages and problems. Only one document at a time is active (selected). Multiple documents appear as tabs.
- **Document information.** Shows the names of all open documents. When there are too many open documents to list, click the forward and backward arrows to scroll through the open documents.

Using the Documents Toolbox


The Documents Toolbox, located on the left side of the workspace, contains tools needed for working with both TI-Nspire™ documents and PublishView™ documents. When you click a toolbox icon, the associated tools appear in the Toolbox pane.



Exploring Document Tools

In the following example, the Document Tools menu is open showing the options for the Calculator application. In TI-Nspire™ documents, the Document Tools menu contains tools available for working with an application. The tools are specific to the active application.

In PublishView™ documents, the Document Tools menu contains tools needed to insert TI-Nspire™ applications and TI-Nspire™ documents, as well as multimedia objects such as text boxes, images, and links to websites and files. For more information, see Working with PublishView™ Documents.

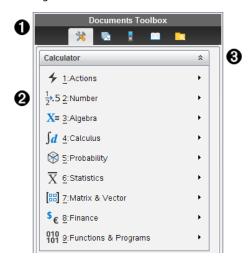

- The Documents Toolbox menu.
- 2 Tools available for the Calculator application. Click ▶ to open the submenu for each option.
- Click to close and click to open Document Tools.


Exploring the Page Sorter

The following example shows the Documents Toolbox with the Page Sorter open. Use the Page Sorter to:

- See the number of problems in your document and where you are.
- Move from one page to another by clicking on the page you want.

Add, cut, copy, and paste pages and problems within the same document or between documents.

Note: When you are working in a PublishView™ document, the Page Sorter is not available in the Documents Toolbox.

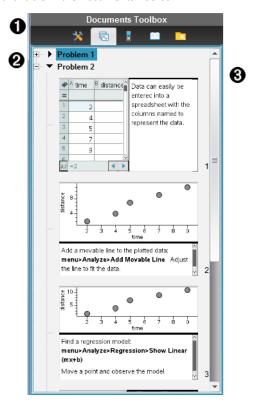

- The Documents Toolbox menu.
- Click the minus sign to collapse the view. Click the + sign to open the view and show pages in the document.
- Scroll bar. The scroll bar is only active when there are too many pages to show in the pane.


Exploring the TI-SmartView™ Feature

The TI-SmartView™ feature emulates how a handheld works. In the teacher software, the emulated handheld facilitates classroom presentations. In the student software, the emulated keypad gives students the ability to drive the software as if using a handheld.

Note: Content is displayed on the TI-SmartView[™] small screen only when the document is in Handheld view.

When working in a PublishView™ document, TI-SmartView™ emulator is not available.

Note: The following illustration shows the TI-SmartView[™] panel in the teacher software. In the Student Software, only the keypad is shown. For more information, see Using the TI-SmartView[™] Emulator.

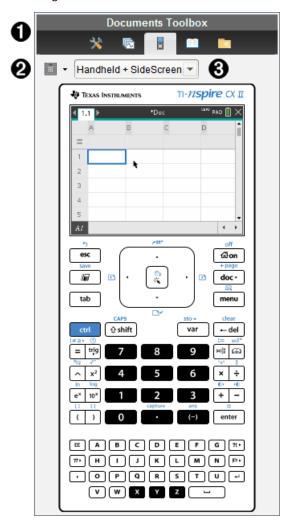

- ♠ The Documents Toolbox menu.
- **2** Keypad Options. Click **▼** to select how to show the handheld:

- Dark
- Light
- Outline
- - Handheld Only
 - Kevpad + SideScreen
 - Handheld + SideScreen

Note: You can also change these options in the TI-SmartView[™] Options window. Click File > Settings > TI-Smartview™ Options to open the window.

Note: The view selector is not available in the student software.


When the Handheld Only display is active, select Always in Front to keep the display in front of all other open applications. (Teacher software only.)

Exploring Content Explorer

Use Content Explorer to:

- See a list of files on your computer.
- Create and manage lesson bundles.
- If using software that supports connected handhelds, you can:
 - See a list of files on any connected handheld.
 - Update the OS on connected handhelds.
 - Transfer files between a computer and connected handhelds.

Note: If you are using TI-Nspire™ software that does not support connected handhelds, the Connected Handheld heading is not shown in the Content Explorer pane.

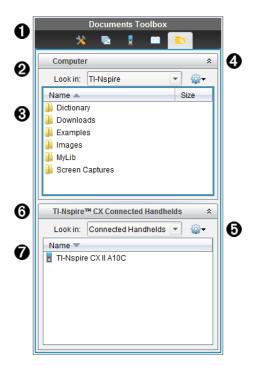


- ♠ The Documents Toolbox menu.
- Shows files on your computer and the name of the folder where the files are located. Click ▼ to navigate to another folder on the computer.
- The list of folders and files within the folder named in the Look In: field. Right-click on a highlighted file or folder to open the context menu listing available actions for that file or folder.
- Olick to close the list of files. Click to open the list of files.
- - · Open an existing file or folder.
 - Move (navigate) up one level in the folder hierarchy.
 - Create a new folder.
 - Create a new lesson bundle.
 - · Rename a file or folder.
 - Copy selected file or folder.

- Paste file or folder copied to Clipboard.
- Delete selected file or folder.
- Select all files in a folder.
- Package lesson bundles.
- Refresh the view.
- Install OS.
- 6 Connected handhelds. Lists the connected handhelds. Multiple handhelds are listed if more than one handheld is connected to the computer or when using the TI-Nspire[™] Docking Stations.
- The name of the connected handheld. To show the folders and files on a handheld, double-click the name.

Exploring Utilities

Utilities provides access to the math templates and operators, special symbols, catalogue items, and libraries that you need when working with documents. In the following example, the Math templates tab is open.

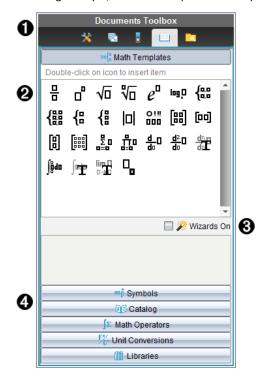

- ♠ The Documents Toolbox menu.
- Math Templates are open. Double-click a template to add it to a document. Click the Math Template tab to close the template view.

To open the Symbols, Catalogue, Math Operators, and Libraries, click the tab.

- Wizards On check box. Select this option to use a wizard to enter function arguments.
- Tabs for opening views where you can select and add symbols, catalogue items, math operators, and library items to a document. Click the tab to open the view.

Using the Work Area

The space on the right side of the workspace provides an area for creating and working with TI-Nspire™ and PublishView™ documents. This work area provides a view of the document so that you can add pages, add applications, and perform all work. Only one document at a time is active.

When you create a document, you specify its page size as Handheld or Computer. This is how the page is displayed in the work area.

- Handheld page size is optimized for the smaller screen of a handheld. This page size can be viewed on handhelds, computer screens, and tablets. The content is scaled when viewed on a larger screen.
- Computer page size takes advantage of the larger space of a computer screen.
 These documents can show details with less scrolling required. The content is not scaled when viewed on a handheld.

You can change the page preview to see how the document will look in a different page size.

To change the page preview, click Document Preview on the toolbar, and then click Handheld or Computer.



For more information on page size and document preview, see *Working with TI-Nspire™ Documents*.

Changing Document Settings

Document settings control how all numbers, including elements or matrices and lists, are displayed in TI-Nspire™ and PublishView™ documents. You can change the default settings at anytime and you can specify settings for a specific document.

Changing Document Settings

- 1. Create a new document or open an existing document.
- 2. From the TI-Nspire™ File menu, select Settings > Document Settings.

The Document Settings dialogue box opens.

When you open Document Settings the first time, the default settings are displayed.

3. Press **Tab** or use your mouse to move through the list of settings. Click ▼ to open the drop-down list to view the available values for each setting.

Field	Values
Display Digits	 Float Float1 - Float12 Fix0 - Fix12
Angle	RadianDegreeGradian
Exponential Format	NormalScientificEngineering
Real or Complex	RealRectangularPolar
Calculation Mode	 Auto Exact Approximate Note: Auto mode shows an answer that is not a whole number as a fraction except when a decimal is used in the problem. Exact mode (CAS only) shows an answer that is not a whole number as a fraction or in symbolic form, except when a decimal is used in the problem.
Exact Arithmetic	 On Off Note: This option is only available on Exact Arithmetic handhelds.
CAS Mode	 On Exact Arithmetic Off Note: This option is only available on CAS handhelds and software.
Vector Format	RectangularCylindricalSpherical

Field	Values
Base	DecimalHexBinary
Unit System	 SI Eng/US Note: This option is only available on CAS handhelds and software.

- 4. Click the desired setting.
- 5. Choose one of the following options:
 - To apply the settings to the open document and to Scratchpad, and to make default for new applications, click OK.
 - Click Cancel to close the dialogue box without making changes.


Changing Graphs & Geometry Settings

Graphs & Geometry settings control how information is displayed in open problems and in subsequent new problems. When you change the Graphs & Geometry settings, the selections become the default settings for all work in these applications.

Complete the following steps to customise the application settings for graphs and geometry.

- 1. Create a new graphs and geometry document or open an existing document.
- 2. In the Documents Toolbox, click 🌟 to open the Graphs & Geometry application menu.
- 3. Click Settings > Settings.

The Graphs & Geometry Settings dialogue box opens.

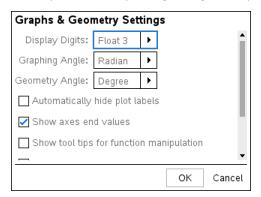

4. Press **Tab** or use your mouse to move through the list of settings. Click ▶ to open the drop-down list to view the available values for each setting.

Field	Values	
Display Digits	•	Auto
	•	Float
	•	Float1 -
		Float12
	•	Fix0 - Fix12
Graphing Angle	•	Auto
	•	Radian
	•	Degree
	•	Gradian
Geometry Angle	•	Auto
	•	Radian
	•	Degree
	•	Gradian

- 5. Select the desired setting.
- 6. Select a checkbox to enable an option or clear a checkbox to disable an option.

Check box	Operation when selected
Automatically hide plot labels	Plot labels are displayed only when selected, grabbed or hovered.
Show axis end values	A numeric label is displayed at the least and greatest values visible on an axis
Show tool tips for function manipulation	Shows helpful information as you manipulate function graphs
Automatically find a point of interest	Shows zeros, minima and maxima for graphed functions and objects while tracing function graphs.

- 7. Choose one of the following options:
 - To apply the settings to the open document and to Scratchpad, and to make default for new Graphs and Geometry applications, click OK.
 - Click Cancel to close the dialogue box without making changes.

Working with TI-Nspire™ Documents

All work that you create and save using TI-Nspire™ applications is stored as a document, which you can share with others using TI-Nspire™ software and with those using handhelds. There are two types of documents:

- TI-Nspire[™] document (.tns file)
- PublishView™ document (.tnsp file)

TI-Nspire™ Documents

A TI-Nspire[™] document consists of one or more problems. Each problem can contain one or more pages. A single page is displayed in the work area. All work occurs in the applications within pages.

Because the TI-Nspire™ software and handhelds share the same functionality, you can transfer TI-Nspire™ documents between computers and handhelds. When you create a document, you select one of two page sizes.

- Handheld. Size: 320 × 217 pixels. This size allows documents to be viewed on all platforms. The content will be scaled when viewed on a tablet or larger screen.
- Computer. Size: 640 × 434 pixels. The content will not be scaled when viewed on smaller platforms. Some content may not be visible on a handheld device.

You can convert a document from one page size to the other any time.

PublishView™ Documents

PublishView™ documents can be printed on a standard piece of paper or published to a website or blog. PublishView™ documents can include formatted text, images and hyperlinks as well as all TI-Nspire[™] applications.

For more information, see Working with PublishView™ Documents.

Creating a New TI-Nspire™ Document

When you open the software, the Documents Workspace opens with a blank document containing one problem. You can add applications and content to this problem to create a document.

Note: The Welcome Screen is displayed when you open the software if the "always show this at startup" option is selected. Click an application icon to add a problem with an active application to a new document.


To create a new document, complete the following steps:

- On the TI-Nspire[™] File menu,
 - Select New TI-Nspire™ Document Handheld Page Size.

-or-

Select New TI-Nspire™ Document - Computer Page Size.

The new document opens in the Documents Workspace, and you are prompted to select an application.

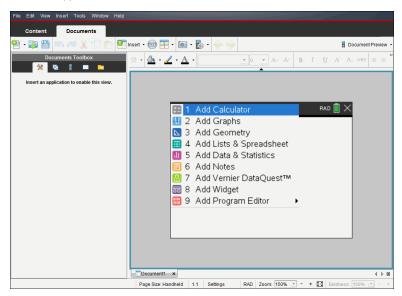

2. Select an application to add a problem to the document.

The problem is added to the document.


Opening an Existing Document

To open an existing document:

1. Click File > Open Document.



The Open dialogue box opens.

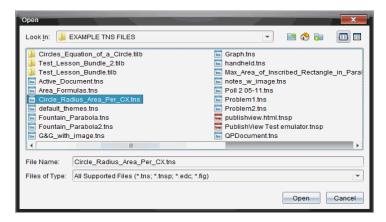

- Use the file browser to locate the file you want to open and click the file to select it.
- 3. Click Open.

The document opens in the work area.


Note: To select from your 10 most recent documents, click **File > Recent Documents** and select a document from the drop-down list.

Saving TI-Nspire™ Documents

To save a new document:



The Save TI-Nspire™ Document dialogue box opens.

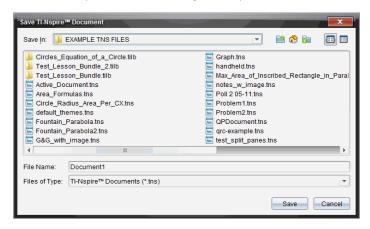

- Navigate to the folder where you want to save the document or create a folder in which to store the document.
- 3. Type a name for the new document.
- 4. Click Save to save the document.

The document closes and is saved with the extension .tns.

Note: When you save a file, the software looks in the same folder the next time you open a file.

Saving a Document with a New Name

To save a previously saved document in a new folder and/or with a new name:

Click File > Save As.

The Save TI-Nspire™ Document dialogue box opens.

- 2. Navigate to the folder where you want to save the document or create a folder in which to store the document.
- 3. Type a new name for the document.
- 4. Click **Save** to save the document with a new name.

Deletina Documents

File deletions on your computer are sent to the Recycle bin and can be retrieved if the Recycle bin has not been emptied.

Note: File deletions on the handheld are permanent and cannot be undone, so be sure that you want to delete the file that you select.

- 1. Select the document you want to delete.
- Click Edit > Delete or press Delete.

The Warning dialogue box opens.

3. Click Yes to confirm the delete.

The document is deleted.

Closing Documents

To close a document, click File > Close or click the Close icon on the document tab at the bottom of the document.



If working in tiled view, click the **Close** icon in the upper right corner of the document window.

Formatting Text in Documents

Use the text formatting tools to format text in TI-Nspire™ applications that allow text input, and to format text in PublishView™ documents. By default, the text formatting toolbar opens in the area above an active document. Options on the toolbar are enabled or disabled depending on the active application.



Option	Function	
*	Click ▼ to open the menu for the active application. This tool enables you to open an application menu regardless of the option selected in the Documents Toolbox.	
	Click ▼ to select a background colour for highlighting text or choose a fill colour for a selected cell.	
4	Click ▼ to select the line colour for an object. For example, in Graphs & Geometry, you can choose a colour for a selected shape.	
A	Click ▼ to select a colour for selected text.	
TI-Nspire Sans 💌 11 💌 🗛 🗛	Use these tools to choose a font and set the size of the font.	
	 Click	
	 To select as specific font size, click	
	Click A to increase the font size or click A to decrease the font size incrementally.	
B I U Aª Aa ABG	Click the appropriate tool to apply bold, italics or underlining; apply superscript or subscript; or strike out text.	
	In a PublishView™ document, use these tools to position text within the header or footer, or in text box. Clicking opens the Hyperlink dialogue box.	

Option	Function
	For more information, see Working with PublishView™ Documents.

Hiding and Showing the Formatting Toolbar

- When the formatting toolbar is visible, click (located under the toolbar) to hide the toolbar.

Using Colours in Documents

In the TI-Nspire[™] applications that allow formatting, you can use colour in filled areas of an object, or in lines or text, depending on the application you are using and how you have selected the item. If the icon or menu item that you want to use is not available (dimmed) after you have selected an item, colour is not an option for the selected item.

Colours appear in documents opened on your computer and on the TI-Nspire™ CX handheld

Note: For more information about using colour in a TI-Nspire™ application, see the chapter for that application.

Adding Colour from a List

To add colour to a fill area, line or text, complete the following steps:

- Select the item.
- 2. Click Edit > Colour or select where you want to add colour (fill, line or text).
- Select the colour from the list.

Adding Colour from a Palette

To add colour using the palette, complete the following steps:

- Select the object.
- 2. Click the appropriate toolbar icon.
- 3. Select the colour from the palette.

Setting Page Size and Document Preview

When you create a document, you specify its page size as Handheld or Computer, depending on how you expect the document to be used. Documents of both page sizes can be opened on either platform, and you can convert the page size any time.

Handheld. Size: 320 × 217 pixels, fixed. Handheld documents can be viewed on all platforms. You can magnify (zoom) the content when viewing it on a tablet or larger screen.

Computer. Size: 640 × 434 pixels, minimum. Computer documents scale up automatically to take advantage of higher resolution screens. The minimum size is 640×434 , so some content may be clipped on handheld devices.

Note: You can view documents of either page size using Handheld or Computer preview.

Converting the Current Document's Page Size

On the main TI-Nspire™ File menu, select Convert to, and then select the page size.

The software saves the current document and creates a copy that uses the requested page size.

Viewing the Document in Handheld Preview

1. On the application toolbar, click **Document Preview**, and select **Handheld**.

The preview changes. This does not change the document's underlying page size.

- 2. (Optional) Adjust the viewing magnification:
 - (Optional) Click the **Zoom** tool beneath the work area, and select a magnification value for the preview.

-or-

- Click the **Zoom to Fit** button **to** make the handheld preview adjust automatically to the window size.

Viewing the Document in Computer Preview

1. On the application toolbar, click **Document Preview**, and select **Computer**.

The preview changes. This does not change the document's underlying page size.

2. (Optional) Click the **Boldness** tool beneath the work area, and select a value to increase or decrease the boldness of text and other items.

Setting a Default Preview

By default, when you open a document, it is automatically displayed using the preview that matches its page size. You can override the rule and specify a preview that you prefer.

- 1. On the main TI-Nspire™ File menu, select Settings > Preview Settings.
- 2. Select the preview that you want documents to use when you open them.

Working with Multiple Documents

When multiple documents are open, document names are listed in tabs at the bottom of the work area. Only one document is active at a time, and only the active document is affected by commands from menus or tools.



To switch between documents:


- Click the tab to show a document in the work area. This document a becomes the active document. If the Show Documents in Tiles view is open, these tabs are not shown.
- Use the right and left arrows to scroll through the list of documents. a These arrows are active only when there are too many documents to fit in the window.
- Click the Show List icon to list all open documents. This is useful when A you have a large number of documents open and documents names on the tabs may be truncated.

Working with Multiple Documents in Tiled View

When multiple documents are open, you can view thumbnails of the documents in the work area. To change the view:

Click Window > Show Documents in Tiles.

Open documents are shown as thumbnails in the work area, and the scroll bar becomes active.

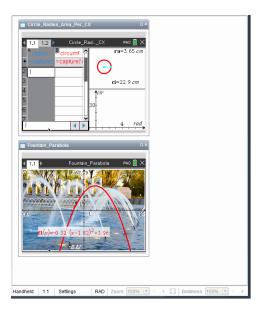


The status bar remains available; however, document names now appear in the thumbnail view. Click **Select Window > Show Documents in Tabs** to view one document at a time in the work area.

Working with Applications

When you first open a new document or add a new problem to a document, you select an application from a menu.

The following illustration shows how a document containing the Lists & Spreadsheet application appears in the work area.

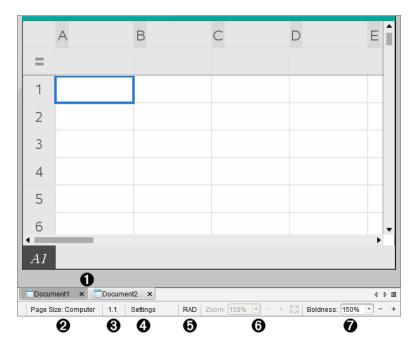

- **Document name**. Tabs show the names of open documents. Click a name to make it the active document.
- Page Size. Shows the document's page size as Handheld or Computer. You can use the TI-Nspire™ File menu to convert a document from one page size to the other.
- Problem/Page counter. Labels the problem number and page number of the active page. For example, a label of 1.2 identifies Problem 1, Page 2.
- Settings. Double-click to view or change the Document Settings for the active document or to change the default Document Settings.
- **Angle Mode**. Shows an abbreviation of the angle mode (Degrees, Radians or Gradians) in effect. Hover the pointer over the indicator to see the full name.
- **3 200m.** Enabled in Handheld preview only (click **Document Preview** on the toolbar and select **Handheld**). Click ▼ and select a magnification value, or click the zoom-to-fit button to make the preview adapt automatically to window size.
- Boldness. Enabled in Computer preview only (click Document Preview on the toolbar and select Computer). Click ▼ and select a value to increase or decrease the boldness of text and other items.

Working with Multiple Applications on a Page

You can add up to four applications to a page. When you have multiple applications on a page, the menu for the active application is displayed in the Documents Toolbox. Using multiple applications involves two steps:

Changing the page layout to accommodate multiple applications.

Adding the applications.

You can add multiple applications to a page even if an application is already active.

Adding Multiple Applications to a Page

By default, each page contains space to add one application. To add additional applications to the page, complete the following steps.

1. Click Edit > Page Layout > Select Layout.




The page layout menu opens.



There are eight page layout options available. If an option is already selected, it is dimmed.

2. Highlight the layout you want to add to the problem or page, then click to select it.

The new layout is displayed with the first application active.

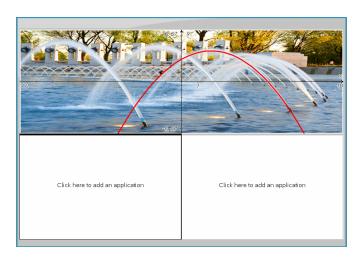

3. In Handheld preview, click Press menu to select an application for each new section in the problem or page. In Computer view, select Click here to add an application.

Swapping Applications

To change the position of applications on a page with multiple applications, "swap" the positions of two applications.

1. Click Edit > Page Layout > Swap Application.

Note: The last active application you worked on is automatically selected as the first application to be swapped.

2. Click the second application to swap.


This action performs the swap.

Note: When there are only two work areas, the selected application automatically swaps position with the other application in the work area.

To cancel a swap, press Esc.

Selecting and Moving Pages

As you add problems and pages to a document, you can take advantage of features for managing the parts.

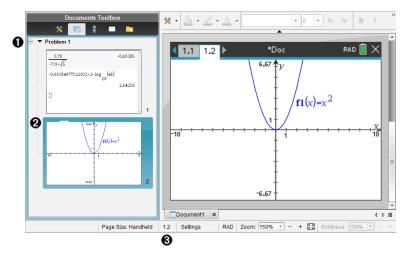

- Page Sorter. Lists the problems you have inserted in your document and shows thumbnail images of the pages in each problem. The Page Sorter lets you rearrange, copy and move both problems and pages. It also lets you rename problems.
- Active page. Indicates the current page by highlighting its thumbnail image. Thumbnails let you easily scan the pages in a document and select a specific page to work with.
- Problem/Page counter. Displays the problem number and page number of the currently selected page.

Selecting Pages

Use any of these methods to move from page to page.

- ▶ On the View menu, select Previous Page or Next Page.
- On the keyboard, press Ctrl+PgUp or Ctrl+PgDn.
 (Mac®: Press Fn+Up Arrow or Fn+Down Arrow).
- ► Click the Previous Page ← or Next Page → button on the main toolbar.
- ► Click the Page Sorter tool in the Documents Toolbox, and then click the thumbnail of the page you want to work with.

Tip: To expand or collapse the list of thumbnails for a problem, double-click the name of the problem.

Rearranging Pages with the Page Sorter

The Page Sorter makes it easy to reorder pages within a problem.

- 1. If necessary, click the Page Sorter tool in the Documents Toolbox.
- 2. In the Page Sorter, drag the thumbnail image of the page to the desired position.

Copying a Page

You can copy a page within the same problem or copy it to a different problem or document.

- If necessary, click the Page Sorter tool in the Documents Toolbox.
- Select the thumbnail of the page to be copied.
- On the **Edit** menu, click **Copy**.
- Click the location at which you want to insert the copy.
- 5. On the Edit menu, click Paste.

Moving a Page

You can move a page within the same problem or move it to a different problem or document.

- If necessary, click the Page Sorter tool in the Documents Toolbox.
- Select the thumbnail of the page to be moved. 2.
- On the Edit menu, click Cut.
- 4. Click the new location of the page.
- 5. On the Edit menu, click Paste.

Deleting a Page

- Select the page in the work area or in the Page Sorter.
- 2. Click Edit > Delete.

Grouping Applications on a Page

You can combine as many as four consecutive application pages into a single page.

- 1. Select the first page in the series.
- 2. Click Edit > Page Layout > Group.

The next page is grouped with the first page. The page layout automatically adjusts to display all the pages in the group.

Ungrouping Applications into Separate Pages

- 1. Select the grouped page.
- 2. Click Edit > Page Layout > Ungroup.

The applications are divided into individual pages.

Deleting an Application from a Page

- 1. Click the application to be deleted.
- 2. Click Edit > Page Layout > Delete Application.

Tip: To undo the delete, press **Ctrl + Z** (Mac[®]: \mathcal{H} + Z).

Working with Problems and Pages

When you create a new document, it consists of a single problem with a single page. You can insert new problems and add pages to each problem.

Adding a Problem to a Document

A document can contain up to 30 problems. Each problem's variables are unaffected by the variables in other problems.

▶ On the Insert menu, select Problem.

-or-

Click the Insert tool
on the main toolbar, and select Problem.

A new problem with an empty page is added to your document.

Adding a Page to the Current Problem

Each problem can contain up to 50 pages. Each page has a work area, where you can perform calculations, create graphs, collect and plot data, or add notes and instructions.

1. Click Insert > Page.

-or-

Click the Insert tool on the main toolbar, and select Page.

An empty page is added to the current problem, and you are prompted to choose an application for the page.

2. Select an application to add to the page.

Renaming a Problem

New problems are named automatically as Problem 1, Problem 2, and so on. To rename a problem:

- If necessary, click the Page Sorter tool to in the Documents Toolbox.
- Click the problem name to select it.
- On the Edit menu, click Rename.
- 4. Type the new name.

Rearranging Problems with the Page Sorter

The Page Sorter lets you reorder problems within a document. If you move a problem that you have not renamed, the numeric part of the default name changes to reflect the new position.

- If necessary, click the Page Sorter tool 🔂 in the Documents Toolbox.
- In the Page Sorter, arrange the problems by dragging each problem name to its new position.

Tip: To collapse a problem's list of page thumbnails, double-click the name of the problem.

Copying a Problem

You can copy a problem within the same document or copy it to a different document.

- If necessary, click the Page Sorter tool in the Documents Toolbox.
- 2. Click the problem name to select it.
- On the **Edit** menu, click **Copy**.
- Click the location at which you want to insert the copy.
- 5. On the Edit menu, click Paste.

Moving a Problem

You can move a problem within the same document or move it to a different document.

- If necessary, click the Page Sorter tool 🔂 in the Documents Toolbox.
- 2. Click the problem name to select it.
- 3. On the Edit menu, click Cut.

- 4. Click the new location of the problem.
- 5. On the Edit menu, click Paste.

Deleting a Problem

To delete a problem and its pages from the document:

- 1. If necessary, click the Page Sorter tool 🔂 in the Documents Toolbox.
- 2. Click the problem name to select it.
- 3. On the Edit menu, click Delete.

Printing Documents

1. Click File > Print.

The Print dialogue box opens.

- 2. Set options for the print job.
 - Printer Select from your list of available printers
 - Print What:
 - Print All prints each page on a separate sheet
 - Viewable Screen prints selected pages with additional layout options (see Layout, below)
 - Print Range Click All Pages, or click Page range and set the starting and ending pages.
 - Layout:
 - Orientation (portrait or landscape)
 - The number of TI-Nspire[™] pages (1, 2, 4 or 8) to be printed on each sheet (available in Viewable Screen option only). The default is 2 pages per sheet.
 - Whether to allow space below each printed TI-Nspire™ page for comments (available in Viewable Screen option only)
 - Margins (from .25 inches to 2 inches) The default margin is .5 inches on all edges.
 - Documentation information to include:
 - Problem name, including the option to group the pages physically by problem
 - Page label (such as 1.1 or 1.2) under each page
 - Page header (up to two lines)
 - Document name in the footer
- 3. Click Print, or click Save As PDF.

Note: To restore the Print defaults, click Reset.

Using Print Preview

- Click the Preview tickbox to toggle the preview pane.
- Click the arrows at the bottom of the preview pane to page through the preview.

Viewing Document Properties and Copyright Information

Note: Most of these instructions apply only to the Teacher Software.

Checking Page Size

- In the Teacher Software, go to the TI-Nspire™ File menu and select Document Properties.
- 2. Click the Page Size tab.
- 3. A tick indicates the document's current page size.

Viewing Copyright Information

The Teacher Software and Student Software let you view copyright information that has been added to a document.

1. On the TI-Nspire™ File menu, select View Copyright Information.

The Copyright Information dialogue box opens.



2. Click **OK** to close the dialogue box.

Adding Copyright Information to a Document

Using the Teacher Software, you can add copyright information to individual documents that you create, or you can apply the same copyright information to all new documents.

1. Open the document.

- 2. On the TI-Nspire™ File menu, select Document Properties.
- 3. Click the Copyright tab.
- 4. Edit the following fields to define the copyright details:
 - Author
 - Copyright (select Public Domain or Copyright).
 - Year (disabled if you selected Public Domain)
 - Owner (disabled if you selected Public Domain)
 - Comments
- To add the supplied information to all new documents from this point forward, select Apply this copyright to all new documents.
- 6. Click **OK** to apply the copyright information to the document.

Protecting a Document (making a document read-only)

Teachers can protect documents to create a document for distribution to your students or for other use. A student who receives a read-only document and makes changes to it will be prompted to save the document as a new file.

- 1. Open the document.
- 2. On the TI-Nspire™ File menu, select Document Properties.
- 3. Click the Protection tab.
- 4. Select the Make this document Read Only checkbox.
- 5. Click OK.

Working with PublishView™ Documents

Use the PublishView™ feature to create and share interactive documents with teachers and students. You can create documents that include formatted text, TI-Nspire™ applications, images, hyperlinks, links to videos and embedded videos in a format that is suitable for printing on a standard piece of paper, publishing to a website or blog, or for use as an interactive worksheet.

PublishView™ features provide layout and editing features for presenting maths and science concepts in a document where TI-Nspire™ applications can be interactively and dynamically linked with supporting media, enabling you to bring the document to life. Using the PublishView™ feature:

- Teachers can create interactive activities and assessments used on screen.
- Teachers can create printed materials to complement documents used on TI-Nspire™ CX II handhelds.
- When working with lesson plans, teachers can:
 - Create lesson plans from existing handheld documents or convert lesson plans to handheld documents.
 - Link to related lesson plans or documents.
 - Embed explanatory text, images, video and links to web resources.
 - Build or interact with TI-Nspire[™] applications directly from the lesson plan.
- Students can create reports or projects such as lab reports containing data playback, curve fits, pictures and video—all on the same sheet.
- Students can print and turn in assignments on a standard piece of paper.
- Students taking exams can use one tool to create a document that contains: all problems on the exam, text, images, hyperlinks, or videos, interactive TI-Nspire™ applications, screen shots and layout options needed to print a document.

Note: PublishView™ documents can reside in the Portfolio Workspace and TI-Nspire™ questions within a PublishView™ document can be automatically graded by the TI-Nspire™ Navigator™ system.

Creating a New PublishView™ Document


1. From the Documents Workspace, click File > New PublishView™ Document.

-or-

Click [™]. and then click **New PublishView Document**.

- A blank letter-size document opens in the Documents Workspace. The orientation is portrait, which cannot be changed.
- The default margin settings for the top and bottom margins are one-inch. There are no settings for side margins.
- By default, a problem is added to the document.

- By default, the document contains the page number in a # of # format at the bottom of the sheet.
- The scroll bars on the right side of the screen and at the bottom of the screen are active.
- Add TI-Nspire™ applications and PublishView™ objects as needed to complete the document.

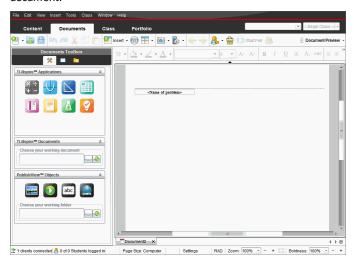

About PublishView™ Documents


When working with PublishView™ documents, it is important to keep the following points in mind:

- PublishView[™] documents are saved as .tnsp files, which distinguishes them from TI-Nspire[™] documents (.tns files).
- When inserting PublishView™ objects into a document, the text, image, hyperlink
 or embedded video are contained in boxes that can be moved and resized.
- When you insert TI-Nspire™ applications, they work the same way as pages in a TI-Nspire™ document.
- In a PublishView™ document, objects can overlap each other and you can control which object is on top or bottom.
- Objects can be placed and positioned in a PublishView™ document in a free-form fashion.
- You can convert an existing TI-Nspire[™] document to a PublishView[™] document (.tnsp file).

- When you convert a PublishView[™] document to a TI-Nspire[™] document (.tns file),
 TI-Nspire[™] applications are converted. PublishView[™] objects containing text,
 hyperlinks, videos and images are not converted.
- You cannot create or open a PublishView™ document on a handheld. You must convert a PublishView™ document to a TI-Nspire™ document before sending it to a handheld.

Exploring a PublishView™ Document

The following example shows how you might use TI-Nspire™ applications and PublishView™ objects to build a PublishView™ document. In this example, borders are turned on to show the boundaries around the objects. Showing borders enables you to work with objects easily while building a document. When you are ready to print or publish the document to the web, you can select to the hide borders.

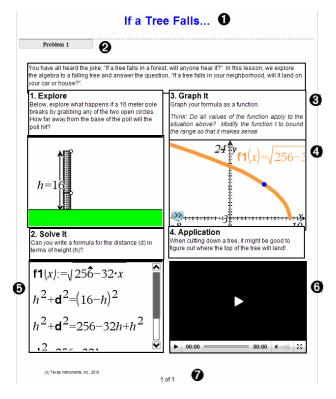

Header. In this example, the header contains the title of the document. When the header area is active, you can type and format text as needed.

- Problem break and name. In PublishView™ documents, use problem breaks to control the page layout. You can select to hide or show problem breaks. Deleting a problem removes the contents of the problem and removes the space between problems when there are multiple problems. Problem breaks also enable you to use variables in PublishView™ documents. Variables that have the same name are independent of one another if they are used in different problems.
- Text boxes. In this example, the introduction text and the text in boxes 1, 2, 3 and 4 is contained in text boxes. You can insert text and hyperlinks into a PublishView™ document using a text box. Text boxes can be resized and positioned as needed. PublishView™ text boxes are not retained when you convert a PublishView™ document to a TI-Nspire™ document.
- 4 TI-Nspire™ applications. In this example, the author uses Graphs & Geometry to show the maths functions. When a TI-Nspire™ application is active in a PublishView™ document, the appropriate application menu opens in the Documents Toolbox. You can work in a TI-Nspire™ application just as you would in a TI-Nspire™ document. When you convert a PublishView™ document to a TI-Nspire™ document, applications are retained.
- Notes application. You can also use the TI-Nspire™ Notes application to add text to a PublishView™ document. Because Notes is a TI-Nspire™ application, it will be retained when you convert the PublishView™ document to a TI-Nspire™ document. Using the Notes application enables you to use an equation editor and can contain TI-Nspire™ maths templates and symbols.
- **(6)** Video. This is an example of a video that is embedded in a PublishView[™] document within a frame. Users can start and stop the video using the controls. Frames containing videos and images can be resized and positioned in the document as needed.
- ▼ Footer. By default, the footer area contains the page number, which cannot be edited. You can add other text above the page number if needed. Like the header, you can format text as needed.

Using the Status Bar in a PublishView™ Document

When a PublishView™ document is open, options on the status bar are different than when working in a TI-Nspire™ document.



- ① Document names are displayed in tabs. If multiple documents are open, the document names are listed. You can have TI-Nspire™ and PublishView™ documents open at the same time. In this example, Document 1 is an inactive TI-Nspire™ document (□). Document 2 is the active PublishView™ document (□). Click the X to close a document.
- Page Size. Shows the document's page size as Handheld or Computer. You can use the TI-Nspire™ File menu to convert a document from one page size to the other.
- Click Settings to change Document Settings. You can specify settings that are specific to an active document or set default settings for all PublishView™ documents. When you convert a TI-Nspire™ document into a PublishView™ document, the settings in the TI-Nspire™ document convert to the settings defined for PublishView™ documents.
- Use the Zoom scale to zoom the active document in or out from 10% to 500%. To set a zoom, type a specific number, use the + and - buttons to increase or decrease by increments of 10%, or use the drop-down box to choose pre-set percentages.
- **(3)** In TI-Nspire™ applications, use the **Boldness** scale to increase or decrease the boldness of text and line thickness within applications. To set the boldness, type a specific number, use the + and buttons to increase or decrease by increments of 10%, or use the drop-down box to choose pre-set percentages.
 - For PublishView™ objects, boldness is used to match text within TI-Nspire™ applications to other text on the PublishView™ sheet. It can also be used to increase the visibility of TI-Nspire™ applications when presenting a document to a class.
- **(6)** When there are too many open document names to show in the status bar, click the forward and backward arrows (◀ ▶) to move through the documents.
- 7 Click to see a list of all open documents.

Saving PublishView™ Documents


Saving a New Document

1. Click File > Save Document.

-or-

Click 🛗

The Save TI-Nspire™ Document dialogue box opens.

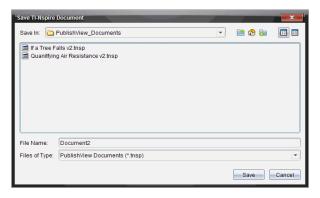

- Navigate to the folder in which you want to save the document.
 - -or-

Create a folder in which to store the document.

- 3. Type a name for the new document.
- 4. Click Save.

The document closes and is saved with the extension .tnsp.

Note: When you save a file, the software first looks in the same folder the next time you open a file.

Saving a Document with a New Name

To save a previously saved document in a new folder and/or with a new name:

1. Click File > Save As from the menu.

The Save TI-Nspire™ Document dialogue box opens.

2. Navigate to the folder in which you want to save the document.

-or-

Create a folder in which to store the document.

- 3. Type a new name for the document.
- 4. Click **Save** to save the document with a new name.

Note: You can also use the Save As option to convert documents from TI-Nspire™ files to PublishView[™] files or convert PublishView[™] files to TI-Nspire[™] files.

Exploring the Documents Workspace

When you create or open a PublishView[™] document, it opens in the Documents Workspace. Use the menu options and the toolbar just as you would when working with a TI-Nspire[™] document to:


- Navigate to existing folders and documents using Content Explorer
- Open existing documents
- Save documents
- Use the copy, paste, undo, and redo options
- Delete documents
- Access TI-Nspire™ application-specific menus
- Open the Variables menu in TI-Nspire[™] applications that allow variables
- Access and insert maths templates, symbols, catalogue items, and library items into a PublishView™ document

Note: For more information, see Using the Documents Workspace.

Exploring the Documents Toolbox

When a PublishView™ document is active, the Documents Toolbox contains tools needed for working with PublishView™ documents. You can add TI-Nspire™ applications to a problem, insert parts of existing TI-Nspire™ documents into a problem, and add PublishView™ objects.

The Documents Toolbox opens when you create a new PublishView™ document or open an existing PublishView™ document. When working in a PublishView™ document, Page Sorter and TI-SmartView™ emulator are not available.

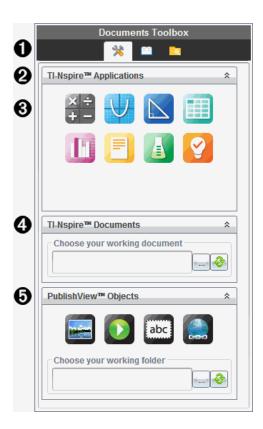

In a PublishView™ document:

- Click
 * to open the application menu and tools needed to work with TI Nspire™ applications and PublishView™ objects.
- Click to open the Utilities panel where you can access Maths Templates,
 Symbols, the Catalogue, Maths Operators, and Libraries.
- Click to open Content Explorer.

Note: For more information, see Using the Documents Workspace.

- 2 Click to collapse a pane containing a menu. Click to expand a pane.
- **③** TI-Nspire[™] applications. Move an icon to a problem to insert an application:
 - Calculator

- **U** Graph
- Geometry
- Lists & Spreadsheet
- Data & Statistics
- Notes
- ✓ Vernier DataQuest™
- Question (Available in TI-Nspire™ CX Premium Teacher Software and TI-Nspire™ Navigator™ NC Teacher Software).
- 4 TI-Nspire™ Documents. Use this tool to locate and insert existing TI-Nspire™ documents (.tns files) into a problem.
- **⑤** PublishView™ Objects. Use this tool to move the following objects into a problem:
 - Image
 - 🚺 Video
 - abc Text box
 - Myperlink

Using Menus and the Toolbar

When working in a PublishView[™] document, select options from the menus or the toolbar in the Documents Workspace to work with content and objects. When you insert an object into a PublishView[™] document, you can manipulate it using the same tools as you would when working with a TI-Nspire[™] document. In PublishView[™] documents, you can:

- Right-click on an object to open a context menu, which displays the actions that can be performed on that object.
- Use add, insert, and paste to add objects to a PublishView™ document.
- Use delete and cut to remove objects from a PublishView™ document.

- Move objects from one place to another within a PublishView™ document.
- Copy objects from one document and paste them into another PublishView™ document.
- Resize and scale objects such as text boxes and images.
- Change the font face and size and apply formatting such as italics, bold, underline, and colour to text.

Note: For more information, see *Using the Documents Workspace*.

Using Context Menus

In TI-Nspire™ applications and in PublishView™ documents, context menus provide a list of options specific to the task you are working on. For example, when you rightclick a cell while working in the TI-Nspire™ Lists & Spreadsheet application, a context menu opens providing a list of actions that you can perform on that cell. When you right-click the border of a text box in a PublishView™ document, the context menu provides actions that can be performed on the text box.

Context Menus in TI-Nspire™ Applications

When you insert a TI-Nspire[™] application into a PublishView[™] document, the application menu and the context menus associated with that application are available and work the same way they work in a TI-Nspire™ document.

Context Menus in PublishView™ Documents

In PublishView™ documents, context menus provide shortcuts to frequently performed tasks. Context menus are specific to an object or area:

- The Sheet context menu provides options for working with the layout of the sheet and document.
- Object context menus provide options for manipulating the object.
- Content-sensitive context menus provide options for working with the content inside the object such as text or a video.

Working with PublishView™ Objects


In a PublishView™ document, text, hyperlinks, images and videos are contained in PublishView[™] objects. You can move, resize, copy and paste and delete an object within a PublishView[™] document. Objects can also be positioned so that one overlaps the other.

Within a document, PublishView™ objects can exist in three states: unselected, selected and interactive.

State Description Unselected When unselected, an object does Object in an unselected state. In this not have handles for example, the object is a text box. repositioning and sizing. To deselect an object, left-click or right-click outside the object. In this example, borders around the object are showing. Selected When selected, an object will Object in a selected state. In this example, the have eight square handles object is a text box. framing the object. To select an object, click the object's border. When selected, objects can be moved and resized. To move an object, click a border and drag the object to its new location. To resize an object, grab a handle. Right-click the border to open a context menu with options for manipulating the object. Interactive An interactive state is indicated Cln Dlu by a blue frame around the =seg(i,i,0 object. To enter interactive 1 u0 1. state, left-click or right-click 1 0.540302 anywhere in the body of the 30 2 0.857553 3 n_max object. When in an interactive 3 0.65429 state, you can work with the 4 0.79348 contents of the object. For 0.701369 5 example, you can add or edit text 6 0.76396

in a text box or complete maths functions in a TI-Nspire™ application. When in an interactive state, context menus contain options specific to the

contents of an object.



Inserting an Object

1. In the Documents Toolbox, ensure the PublishView™ Objects menu is open.



- Use your mouse to click an icon and drag it to the document.
- Release the mouse button to drop the object into the document.



Selected text boxes and frames can be resized, moved, copied, pasted and deleted.




4. Using the mouse, grab the handles to resize the object and drag it to position the object in the document as needed.

Opening Object Context Menus

Right-click the border of any object in a PublishView[™] document.

The context menu opens to provide access to delete, copy/paste, cut and bring to front/send to back actions.

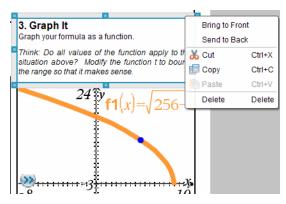

Resizing an Object

- Click any border around the object to select it. The border becomes a bold blue line and the handles are active.
- 2. Move your mouse over one of the handles to activate the resizing tool



- Grab one of the handles and drag in the direction needed to make the object larger or smaller.
- 4. Click outside the object to save the new size.


Moving an Object

To move an object to another location on the page:

- 1. Click any border around the object to select it. The border becomes a bold blue line and the handles are active.
- 2. Move your cursor over one of the borders to activate the positioning tool




Click to grab the object. The horizontal and vertical alignment guides are activated at the top and bottom of the object. Use the grid lines to position the object on the page.

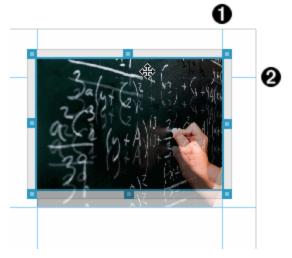

- 1 vertical alignment guide
- 2 horizontal alignment guide
- Drag the object to a new location on the page.
- Release the mouse button to drop the object in its new location.


Overlapping Objects

You can position objects so that one is on top of another. You can control the stacking order to specify which object is positioned in front or behind the other. Overlapping objects have many practical uses when presenting information in the classroom. For example, you can create a "curtain control" by placing an empty text box over other objects. Then, you can move the text box to reveal the items below it one at a time.



To change the position of an object in the stacking order:

1. Click the border of the object you want to position to select it, and then right-click to open the context menu.

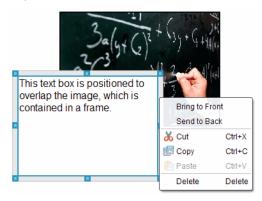

2. Click Send to back or Bring to front to move the selected object to the desired position.

Deleting an Object

To delete an object from a sheet:

- 1. Click any border of the object to select it. When an object is selected, the border is blue and the handles are active.
- 2. Press the **Delete** key to delete the text box.

-or-

Right-click a border, and then click Delete from the context menu.

Choosing a Working Folder for PublishView™ Objects


Use the Choose Your Working Folder field in the PublishView™ Objects pane to select a folder for storing PublishView™ documents and related files.

1. Ensure the PublishView™ Objects pane is open.



2. Click

The Choose Your Working Folder dialogue box opens.

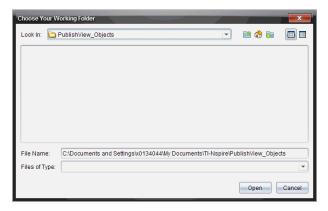

- Navigate to the folder where you want to store video and image files.
- 4. Click Open to choose the working folder.

The selected folder becomes the working folder and the folder name is displayed in the Choose your working folder field. Previews of supported images and video files in the folder are shown in the PublishView™ objects pane.



5. To add an image or video file to a PublishView™ document, select the file and move it onto the active sheet.

Working with TI-Nspire™ Applications


Note: For more information, see the appropriate chapter in this guidebook.

Adding an Application to a Problem

To add a TI-Nspire[™] application to a problem in a PublishView[™] document:

- 1. Choose one of the following actions to select an application:
 - From the TI-Nspire™ Applications pane in the Documents Toolbox, use the mouse pointer to point to the application and drag it to the problem.
 - From the menu bar, click **Insert** and choose an application from the drop-down menu.
 - Right-click inside the sheet to open the context menu, click Insert and choose an application from the menu.

The application is added to the sheet.

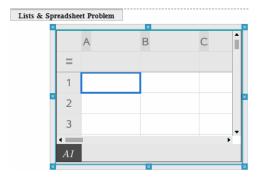

- Using your mouse, grab the handles to resize or position the application object as 2. needed.
- 3. Click outside the application frame to accept the dimensions.
- 4. To open the menu for the active TI-Nspire™ application, click inside the application.

The menu opens in the Documents Toolbox above the TI-Nspire™ Applications pane.

Right-click on an application element, such as a cell or function to open the context menu for that item.



5. To work in the application, click an option from the application menu. Click a to collapse the application menu pane.


Adding Existing TI-Nspire™ Documents

Use the TI-Nspire™ Documents pane to open an existing TI-Nspire™ document to add to a PublishView™ document. When you open an existing TI-Nspire™ document, all pages of the document appear in the preview pane. You can move complete problems or individual pages onto the PublishView™ sheet.

Choosing a Working TI-Nspire™ Document


To choose a working document:

1. In the Documents Toolbox, ensure the TI-Nspire™ Documents pane is open.



2. Click


The Choose Your Working Document dialogue box opens.

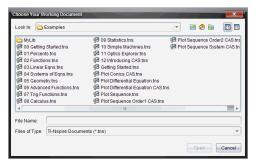

- 3. Navigate to the folder in which the TI-Nspire™ document is stored:
 - Click

 in the Look in: field to use a file browser to locate a folder.
 - From an open folder, click to move up a level in the folder hierarchy
 - Click to return to the default home folder
 - Click to add a new folder to open folder on your computer.
 - Click to list folders and files. To show details, click.
- 4. Select the file, and then click Open.

The TI-Nspire™ document opens in the TI-Nspire™ Documents pane.

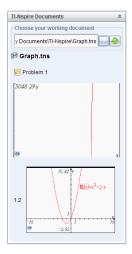

5. To add the TI-Nspire™ document to the PublishView™ document, move one page at a time or one problem at a time to the PublishView™ sheet.

If you are adding a problem with multiple pages, the pages are stacked on top of each other on the PublishView™ sheet. Move the top page to see the other pages.

Working with Problems

Like a TI-Nspire™ document, a PublishView™ document consists of one or more problems.

Problems are used to control the layout of a PublishView™ document so that you can isolate variables. When variables with the same name are used in multiple problems, variables can have different values. To add problems to PublishView™ documents, open the Sheet context menu or use the options on the Insert menu in the Documents Workspace. When adding problems, keep the following guidelines in mind:

- By default, a new PublishView™ document contains one problem.
- You can insert a problem after any existing problem.
- You cannot insert a problem in the middle of an existing problem.
- A new problem break is always inserted after the selected problem.
- Inserting a problem break adds empty space below the break.
- Any object between two problem breaks is part of the problem above the break.
- The last problem includes all sheets and objects below the last problem break.
- Problem breaks are not relative to any object, which lets you move objects within a problem without affecting the problem break location.

Adding a Problem

To add a problem to an open PublishView™ document:

1. Right-click anywhere on the sheet, and then click Insert > Problem.

The problem is added to the document below any existing problems. The problem break provides a visible divider between problems.





2. To name the problem, highlight the default text, type a name, and then click outside the text box to save the name.

The problem break is saved.



If a document has multiple problems, use the scroll bar on the right side of the document to move up and down through the problems.

Managing Problem Breaks

Problem breaks are used to separate problems and variable sets.

- Every problem has a problem break.
- A problem break becomes visible when a problem is added to a document.

- A problem break is represented by a dashed line with the name of the problem positioned on the left side of the sheet.
- By default, the problem name is shown as <Name of problem>. Highlight the default text to type a new name for the problem.
- Problem names do not have be unique. Two problems can have the same name.

Hiding and Showing Problem Breaks

You can select to hide or show problem breaks in a PublishView[™] document. By default, problem breaks are shown.

- Right-click in any blank area of the document (outside of any object) to open the sheet context menu.
- 2. Click Layout Options.

The Show/Hide Options dialogue box opens.

Note: You can also click View > PublishView™ Layout Options.



- 3. Clear the **Show problem breaks** option to hide problem breaks in the document. Select the option to return to the default setting and show the problem breaks.
- 4. Click **OK** to close the dialogue box.

Renaming a Problem

- 1. Click the existing problem name on the problem break line.
- 2. Type a new name for the problem.
- 3. Click outside the text box to save the new name.

Deleting a Problem

To delete a problem, complete one of the following actions:

- Select the problem break and click * on the right side of the break.
- Click Edit > Delete.
- Right-click the problem break and click Delete.
- Select the problem break and press the **Delete** or **Backspace** key.

When you delete a problem, all objects contained in the problem are removed and the space between the selected problem break and the next problem break is removed.

Organizing PublishView™ Sheets

A PublishView™ document can have multiple sheets. A single sheet is displayed in the workspace on your screen. All work occurs in the PublishView™ objects and TI-Nspire™ applications within sheets.

Adding Sheets to a Document

To add a sheet to a document:

Click Insert > Sheet.

The sheet is added to the document and the numbering increments by one.

Opening the Sheet Context Menu

Right-click in any blank area (outside of any object) in a PublishView™ sheet.

A context menu opens with options for inserting problems, pages, applications and PublishView[™] objects, edit options for removing space or deleting a page and options for hiding and showing problem breaks and object borders.



Page Numbering

In a PublishView™ document, page numbering is displayed in the bottom margin (footer). By default, numbering is placed in the centre of the PublishView™ sheet in a # of # format. You cannot edit or delete page numbering.

Working with Headers and Footers

PublishView™ documents contain space at the top and bottom of a sheet to add a header or a footer. Headers and footers can contain the date, the document name, the lesson plan name, the class name, your school's name, or any other information needed to identify a document.

By default, headers and footers do not contain content and boundaries for the header and footer are hidden. To activate a header or footer for editing, click inside the top or bottom margin. When activated, a text box with a light grey border is displayed.

Inserting and Editing Text in Headers and Footers

1. Click inside the top or bottom margin.

The text box borders in the margin become visible and the object space is disabled. The cursor is placed in the header or footer space and the formatting toolbar becomes active.



2. Type the text.

- The default font is TI-Nspire[™] true type, 12 pt, normal.
- By default, text is centreed horizontally and vertically.
- Text can be aligned: left, centre, right, or justified.
- Text that does not fit within the text box horizontally will wrap to the next line.
- Text that does not fit within the text box vertically will not be shown, but text is retained. (If you delete text, the hidden text will appear.)
- 3. Complete one of the following actions to save the text:
 - Single-click anywhere outside the header or footer text box to save the text.
 - Press Esc to save the text.

The PublishView™ sheet becomes active and the formatting menu closes.

Showing and Hiding Borders

By default, borders are displayed when you insert an object into a problem. When you select to hide borders, the selection applies to all objects in the document and to objects that you add to the document. To hide the border:

- Right-click in any blank area of the sheet (outside of any object) to open the context menu.
- 2. Click Layout Options.

The Layout Options dialogue box opens.

Note: You can also click View > PublishView™ Layout Options.



- Clear the Show object borders option to hide the borders around the objects in the problem. Select the option to return to the default setting and show borders.
- 4. Click **OK** to close the dialogue box.


Adding and Removing Space

To manage how PublishView™ objects appear on a sheet, you may need to add or delete space between objects.

Note: You can add and remove vertical space between objects using this method. To add or remove horizontal space between objects, move the object.


Adding Space

- 1. Right-click in the area outside of any object where you want to add space. The context menu opens.
- 2. Click Edit > Add/Remove Space. The Add/Remove Space tool becomes active.

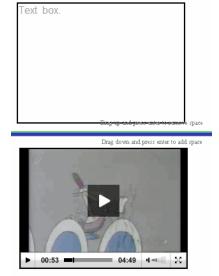

Add/Remove Space tool

- 3. Use your mouse to position the tool to the exact place where you want to add space.
- 4. Click the tool, and then drag down to select the amount of space you want to add. As you select the amount of space to be added, it is indicated in green.

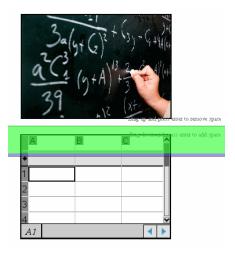

5. Press the **Enter** key to add the space in between the objects. You can adjust the amount of space by dragging up and down before you press Enter.

Removing Space

- 1. Right-click in the area outside of any object where you want to remove space. The context menu opens.
- 2. Click Edit > Add/Remove Space.

The Add/Remove Space tool becomes active.





Add/Remove Space tool

- 3. Use your mouse to position the tool to the exact place where you want to remove space.
- 4. Click the tool, and then drag **up** to select the amount of space you want to remove. As you select the amount of space to be removed, it is indicated in red.



5. Press the **Enter** key to remove the space in between the objects. You can adjust the amount of space by dragging up and down before you press Enter.

Note: If there is not enough space on the sheet to accommodate the objects, the objects won't be moved when space is removed.

Deleting Blank Sheets from Problems

You can delete a sheet that does not contain any TI-Nspire™ applications or PublishView™ objects from a problem. To delete a blank sheet from a problem:

- Delete any TI-Nspire[™] applications, PublishView[™] objects, move or delete any problem breaks from the sheet.
- 2. Place your cursor inside the sheet you want to delete.
- Right-click inside the blank sheet to open the context menu.
- 4. Click Edit > Delete Sheet.

The blank sheet is removed from the problem.

Using Zoom

The zoom feature lets you zoom in on any object or area on the PublishView™ document for discussion, and zoom out to see an overview of the lesson. The zoom uses the centre point of the viewable area to zoom in.

The default zoom setting is 100%.

- To change the zoom percentage, do one of the following:
 - Type the number in the box and press **Enter**.
 - Use the and + buttons to decrease or increase the percentage in 10% increments.
 - Use the drop-down arrow to choose a preset percentage.

The zoom settings are retained when you save the document.

Adding Text to a PublishView™ Document

In a PublishView[™] document, there are three ways to add text:


- Insert a PublishView™ text box to enter free-form text or copy text from other sources into the document. For example, you can place a PublishView™ text box next to an image and type a description in a text box. You can also copy and paste text from .doc, .txt and .rtf files. Use PublishView™ text boxes when you need options for emphasizing and formatting text. PublishView™ text boxes are not converted when you convert a PublishView™ document to a TI-Nspire™ document. You may want to use a PublishView™ text box to add text that you don't want handheld users to see.
- Use the TI-Nspire™ Notes application. You should use the Notes application when you need an advanced equation editor and when you need to use TI-Nspire™ maths templates and symbols. Superscript and subscript are also easier to use in the Notes application. You should also use Notes when you are planning to convert the PublishView™ document to a TI-Nspire™ document for use on a handheld and you want handheld users to see the text.
- Add text in TI-Nspire[™] applications that allow text just as you would in a TI-Nspire™ document.

Inserting Text into a Text Box

Ensure the PublishView™ Objects pane is open.




- Use your mouse to click and drag it to the problem.
- 3. Release the mouse button to drop the text box into the problem.



- 4. Using the mouse, grab the handles to resize the text box or position in the problem as needed.
- 5. Click outside the text box to save the size and position.
- 6. Click "Type your text here".

The formatting toolbar becomes active. The text box is in an interactive state for adding or editing text.



7. Type the new text.

-or-

Copy and paste text from another file.

- 8. Apply formatting as needed.
- 9. Click outside the text box to save the text.

Formatting and Editing Text

The options for editing and formatting text are located on a formatting toolbar at the top of the active document. Formatting options for editing text include:

- Changing the font, font size and font colour.
- Applying bold, italics and underline formatting.
- Applying the following text horizontal alignment options: left, right, centreed and iustified.
- Inserting hyperlinks.

Launching Edit Mode

- Click inside a text box to launch edit mode.
 - The formatting menu opens.
 - The text is selectable for editing.

Opening the Content Context Menu

Right-click inside a text box containing text or a hyperlink.

The formatting menu and context menu open providing shortcuts to cut, copy and paste.

Using Hyperlinks in PublishView™ Documents

In PublishView™ documents, use hyperlinks to:

- Link to a file
- Link to a website on the Internet

You can add a hyperlink to an open document or you can convert any text within a text box to a hyperlink. When a hyperlink is added, the formatting of the text is underlined and the font colour is blue. You can change the formatting of the hyperlinked text without losing the hyperlink.

If a link is broken, an error message is displayed when you click the link:

- Cannot open the specified file
- Cannot open the specified web page

PublishView[™] text boxes support both absolute and relative links.

Absolute links contain the complete location of the linked file and do not depend on the location of the main document.

Relative links contain the location of the linked file relative to the main document. If you have multiple lessons in a single folder and they are all linked using relative addressing, you can move the folder to any other location (another local folder, datashare, flash drive, online) without breaking the links. The links also stay intact if you bundle the documents into a lesson bundle or zip them into a zip file and share them.

Note: The PublishView™ document must be saved before you can insert a relative hyperlink.

Linking to a File

You can link to any file on your computer. If the file type is associated with an application on your computer, it will launch when you click the link. There are two ways to link to a file; by typing or pasting a file address into the Address field, or by browsing to a file.

Linking to a File by Using an Address

1. Ensure the PublishView™ Objects pane is open.



Drag the hyperlink icon onto the document.

The Hyperlink dialogue box opens.



- 3. Type the name of the link in the Text field. For example, this can be the name of the document.
- 4. Copy the location of the file path you want to link to, and paste it in the Address field.

-or-

Type the location of the file in the Address field.

Note: Type ../ to designate parent directories. For example: ../../lessons/mathlesson2.tns

5. Click **OK** to insert the link.

A text box containing the hyperlink is added to the PublishView™ document.

Linking to a File by Browsing

1. Ensure the PublishView™ Objects pane is open.




2. Drag the hyperlink icon onto the document

The Hyperlink dialogue box opens.



- 3. Type the name of the link in the Text field. For example, this can be the name of the document.
- 4. Click to select Link to a file on your computer or network drive.

The Select file to insert as hyperlink dialogue box opens.

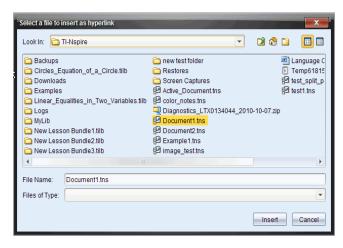

Navigate to and select the file you want to link to, and then click **Insert**.

The path name is inserted into the Address field in the Hyperlink dialogue box.

If the software is unable to determine if the link is a relative or absolute address, the Hyperlink dialogue box opens with an option to change the type of link.


To change the link, click the appropriate option:

- Change to absolute address.
- Change to relative address.
- 6. Click **OK** to insert the link.

-or-

Click Start Over to go back to the Hyperlink dialogue box and choose a different file to link, or to edit the Text or Address fields.

A text box containing the hyperlink is added to the PublishView[™] document.



7. Using the mouse, grab the handles to resize the text box.

-or-

Grab any border to position the text box in the document as needed.

Linking to a Website

There are two ways to link to a website; by typing or pasting the URL into the Address field, or by browsing to a file.

Linking to a Website by Using an Address

- Ensure the PublishView™ Objects menu is open.
- Drag the hyperlink icon onto the document to open the Hyperlink dialogue box. 2.
- Type or paste the URL you want to link to in the Address field. 3.
- 4. Click OK.

A text box containing the hyperlink is added to the PublishView™ document.

Linking to a Website by Browsing

- 1. Ensure the PublishView™ Objects menu is open.
- Drag the hyperlink icon onto the document to open the Hyperlink dialogue box.
- Click to select Link to an Internet resource.

The browser opens to your default website.

- Navigate to the website or file on a website that you want to link to.
- 5. Copy the URL, and then paste it in the Address field in the Hyperlink dialogue box.

-or-

Type the URL in the Address field.

6. Click OK.

A text box containing the hyperlink is added to the PublishView™ document.



7. Using the mouse, grab the handles to resize the text box.

-or-

Grab any border to position the text box in the document as needed.

Editing a Hyperlink

To change the name of a hyperlink, change the path, or change the URL, complete the following steps.

Using your mouse, right-click the hyperlink text, and then click **Edit hyperlink**.

The Hyperlink dialogue box opens.



- Make corrections as needed:
 - Type corrections to the hyperlink name in the **Text** field.
 - to open the Select a file to add as a hyperlink dialogue box and use the file browser to navigate to the folder where the file is located.
 - Click to open a browser and navigate to a website to copy and paste the correct the URL in the Address field.
- 3. Click **OK** to save the changes.

Converting Existing Text to a Hyperlink

- Click inside the text box to activate edit mode and open the formatting menu.
- 2. Select the text you want to convert to a hyperlink.
- 3. Click

The Hyperlink dialogue box opens with the selected text in the Text field.

to create a link to a file.

-or-

Click to create a link to page on a website.

Removing a Hyperlink

Use this process to remove a link from text inside a text box. The text remains in the document.

- 1. Using your mouse, right-click the hyperlink text.
- 2. Click Remove hyperlink.

The hyperlink formatting is removed from the text and the text is no longer clickable.

Note: To remove both the text and hyperlink, delete the text. If a text box contains only the linked text, delete the text box.

Working with Images

Images can be added to PublishView™ documents as PublishView™ objects or can be added inside TI-Nspire™ applications that support images. Supported files types are .bmp, .jpg and .png files.

Note: If a TI-Nspire™ application is active in the PublishView™ document, the image is added to the TI-Nspire™ page if you click Insert > Image from the menu bar or context menu. If there is no TI-Nspire™ document active, the image is added as a PublishView™ object. Only images inside TI-Nspire™ applications convert to TI-Nspire™ documents (.tns files).

Inserting an Image

Ensure the PublishView™ Objects pane is open.



and then drag the icon to the document.

The Choose an image to insert into PublishView™ dialogue box opens.

Note: By default, the Texas Instruments preloaded images folder is displayed.



- Navigate to the folder where the image file you want to insert is located, and then highlight the file name.
- 4. Click Insert image.

The image is added to the PublishView™ sheet.



5. Using the mouse, grab the handles to resize the text box,

-or-

Grab any border to position the text box in the document as needed.

Moving Images

1. Click the frame containing the image to select it.



- 2. Move your cursor over the edge of the image to activate the positioning tool.
- 3. Move the image to its new location on the PublishView™ sheet.

Note: Objects can overlap each other on a PublishView[™] sheet.

Resizing Images

1. Click the frame containing the image to select it.



- 2. Move your cursor over one of the blue handles to activate the resizing tool.
- Drag the handle to make the image smaller or bigger.

Deleting Images

- Click the image to select it, and then press the **Delete** key.
 - -or-
- Right-click a handle to open the context menu, and then click Delete.

Working with Video Files


You can embed video files in a PublishView™ document and play the videos directly from the PublishView™ document. You can also insert a link to a video that will launch in a new browser window or media player window. For more information, see *Working with Hyperlinks*.

Note: PublishView[™] supports the MP4 (MPEG-4 multimedia container) format with H264/AVC (Advanced Video Coding) video compression and AAC audio.

Inserting a Video

- 1. Ensure the PublishView™ Objects pane is open.
- 2. Click , and then drag the icon to the document.

The **Choose a video to insert into PublishView™** dialogue box opens.



- Navigate to the folder where the video file you want to insert is located, and select the file name.
- 4. Click Insert video.

An object containing the embedded video is added to the PublishView $^{\text{\tiny{M}}}$ sheet. By default, the resizing and positioning handles are active.



- 5. Using the mouse, grab the handles to resize the object or grab any border to position the object in the document as needed. For example, you may want to position the object containing the video above or below a text box that contains text introducing the video.
- 6. To play the video, click the forward arrow or click anywhere in the viewing window.

Using the Video Console

The video console lets users control the video.



- Starts or stops the video.
- 2 Shows the elapsed time as the video plays.
- Mutes or unmutes the audio.

Converting Documents

You can convert PublishView™ documents (.tnsp files) to TI-Nspire™ documents (.tns files) for display on handhelds. You can also convert TI-Nspire™ documents to PublishView™ documents.

Converting a document creates a new document—the original document remains intact and is not linked to the new document. If you make changes to one document, the changes are not reflected in the other document.

Converting PublishView™ Documents to TI-Nspire™ Documents

You cannot open a PublishView™ document (.tnsp file) on a handheld. However, you can convert the PublishView™ document to a TI-Nspire™ document that can be

transferred to and opened on a handheld. When you convert a PublishView™ document to a TI-Nspire™ document:

- Only the TI-Nspire[™] applications become part of the TI-Nspire[™] document.
- PublishView[™] objects such as text boxes, images, hyperlinks and videos are not converted.
- Text contained in PublishView™ text boxes is not converted; however, text in a TI-Nspire[™] Notes application is converted.
- If images are contained in a TI-Nspire™ application, they are converted; however, images contained in PublishView™ objects are not converted.

Complete the following steps to convert a PublishView™ document (.tnsp file) to a TI-Nspire[™] document (.tns file).

- 1. Open the PublishView™ document to be converted.
- 2. Click File > Convert to > TI-Nspire™ Document.
 - The new TI-Nspire[™] document opens in the Documents Workspace.
 - All supported TI-Nspire[™] applications are part of the new TI-Nspire[™] document.
 - Starting from top to bottom, and then left to right, the layout of the TI-Nspire™ document is based on the order of the TI-Nspire[™] applications in the PublishView™ document.
 - Every TI-Nspire™ application in a PublishView™ document will appear as a page in the converted TI-Nspire™ document. The order of the pages in the TI-Nspire[™] document is based on the layout of the TI-Nspire[™] applications in the PublishView™ document.
 - If two or more problems are at the same level, the order is left to right.
 - Problem breaks are maintained.
 - The new TI-Nspire™ document is not linked to the PublishView™ document.
- 3. When work in the document is complete, click to save the document in the current folder.

-or-

Click File > Save As to save the document in a different folder.

Note: If the document has never been saved, both the Save and Save as options allow saving in a different folder.

Note: You can also use the Save as option to convert a PublishView™ document to a TI-Nspire™ document.

Note: If you try to convert a PublishView™ document that does not contain TI-Nspire™ pages or applications, an error message is displayed.

Converting TI-Nspire™ Documents to PublishView™ Documents

You can convert existing TI-Nspire™ documents to PublishView™ documents, which enables you to take advantage of the richer layout and editing features for printing, generating student reports, creating worksheets and assessments and publishing documents to a website or blog.

Complete the following steps to convert a TI-Nspire™ document to a PublishView™ document:

- 1. Open the TI-Nspire™ document you want to convert.
- 2. Click File > Convert to > PublishView™ Document.
 - The new PublishView[™] document opens in the Documents Workspace.
 - By default, there are six objects per page.
 - When converted, each problem from the TI-Nspire™ document will start a new sheet in the PublishView™ document.
 - Problem breaks are maintained.
- 3. When work in the document is complete, click to save the document in the current folder.

-or-

Click File > Save As to save the document in a different folder.

Note: You can also use the **Save as** option to save a TI-Nspire[™] document as a PublishView™ document.

Printing PublishView™ Documents

You can print reports, worksheets and assessments created using the PublishView™ feature. To print a document:

Click File > Print.

The Print dialogue box opens. A preview of the document is shown on the right side of the dialogue box.

2. Select a printer from the menu.

Note: The Print what field is disabled.

- 3. Select Paper Size from the menu. Options are:
 - Letter (8.5 x 11 inches)
 - Legal (8.5 x 14 inches)
 - A4 (210 x 297 mm)
- 4. Select the number of **Copies** you want to print.
- 5. In the **Print Range** area, select to print all pages in the document, a range of pages, or the current page only.

Note: By default, top and bottom margins are set to one-inch and are maintained when printing a PublishView™ document. There are no side margins. PublishView™ sheets print just as they appear in the workspace.

- 6. If needed, select or clear the boxes to:
 - Print Problem Breaks and Names.
 - Print Headers
 - Print Footers
 - Show object borders
- 7. Click Print, or click Save As PDF.

Working with Lesson Bundles

Many lessons or activities contain multiple files. For example, teachers usually have a teacher version of a file, a student version, assessments and sometimes supporting files. A lesson bundle is a container that enables teachers to group all files needed for a lesson together. Lesson bundles are used to:

- Add any type of file (.tns, .tnsp, .doc, .pdf, .ppt) to a lesson bundle.
- Send lesson bundles to connected handhelds or laptops; however, only the .tns files are sent to the handheld.
- View all the files in a lesson bundle using the TI-Nspire[™] software.
- Group all files associated with one lesson in one place.
- Email one lesson bundle file to teachers or students instead of looking for and attaching multiple files.

Creating a New Lesson Bundle

Teachers and students can create new lesson bundles in the Documents Workspace. Teachers can also create new lesson bundles in the Content Workspace.

Creating a Lesson Bundle in the Documents Workspace

Complete the following steps to create a new lesson bundle. By default, the new lesson bundle does not contain files.

- 1. Click in the Documents Toolbox to open the Content Explorer.
- 2. Navigate to the folder where you want to save the lesson bundle file.
- 3. Click wo to open the menu, and then click New Lesson Bundle.

The new lesson bundle file is created with a default name and placed in your list of files.

- 4. Type a name for your lesson bundle.
- 5. Press Enter to save the file.

Creating Lesson Bundles in the Content Workspace

In the Content Workspace, teachers have two options for creating lesson bundles:

- When files needed for a lesson bundle are located in different folders, create an empty lesson bundle and then add files to the lesson bundle.
- If all needed files are located in the same folder, create a lesson bundle with selected files.

Creating an Empty Lesson Bundle

Complete the following steps to create a lesson bundle that does not contain files.

1. Navigate to the folder on your computer where you want to save the lesson bundle.

Note: If you are using the software for the first time, you may need to create a folder on your computer before creating a lesson bundle.

or click File > New Lesson Bundle.

The new lesson bundle file is created with a default name and placed in the list of files.

3. Type a name for the lesson bundle and press Enter.

The lesson bundle is saved with the new name and details are shown in the Preview pane.

Creating a Lesson Bundle Containing Files

You can select multiple files within a folder, and then create the lesson bundle. You cannot add a folder to a lesson bundle.

- 1. Navigate to the folder that contains the files you want to bundle.
- 2. Select the files. To select multiple files, select the first file then hold down Shift and click the last file in the list. To select random files, select the first file and then hold down Ctrl and click the other files to select them.
- 3. Click , and then click Lesson Bundles > Create New Lesson Bundle from selected.

A new lesson bundle is created and placed in the open folder. The lesson bundle contains copies of the selected files.

4. Type a name for the lesson bundle and press **Enter**.

The lesson bundle is saved in the open folder and the details are shown in the Preview pane.

Adding Files to a Lesson Bundle

Use any of the following methods to add files to a lesson bundle:

- Drag any file into a selected lesson bundle. This method moves the file to the lesson bundle. If you delete the lesson bundle, the file is deleted from your computer. You can recover the file from the Recycle Bin.
- Copy and paste any file into a selected lesson bundle.
- Use the "Add files to lesson bundle" option. This method copies the selected files into the lesson bundle. The file is not moved from its original location.

Using the Add Files to Lesson Bundle Option

Use this option to add files to an empty lesson bundle or add more files to an existing lesson bundle.

- 1. Use one of the following options to select the lesson bundle file.
 - When working in the Documents Workspace, open the Content Explorer and then double-click the lesson bundle file name.

When working in the Content Workspace, double-click the lesson bundle name.


Note: In the Content Workspace, you can also click the lesson bundle name to open the Files dialogue box in the Preview pane. The Add Files to Lesson Bundle option is available from the Files dialogue box. If the lesson bundle already contains files, the first file in bundle is shown in the Files dialogue box.

The lesson bundle dialogue box opens. The name reflects the name of the lesson bundle.



Click Add Files to Lesson Bundle.

The Add dialogue box opens.

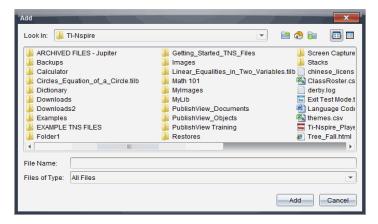

- Navigate to and select the file you want to add to the lesson bundle.
 - You can select multiple files at one time if they are located in the same folder.
 - If files are located in different folders, you can add them one at a time.
 - You cannot create a folder within a lesson bundle or add a folder to a lesson bundle.
- 4. Click Add to add the file to the bundle.

The file is added to the bundle and is now listed in the lesson bundle dialogue box.


5. Repeat this process until all needed files are added to the lesson bundle.

Opening a Lesson Bundle

To view and work with files within a lesson bundle, complete one of the following steps to open the lesson bundle file.

- Double-click the lesson bundle name.
- Select the lesson bundle, and then right-click and click Open.
- Select the lesson bundle, click , and then click Open.
- Select the lesson bundle, and then press Ctrl + O. (Mac $^{\circ}$: \mathcal{H} + O).

When you open a lesson bundle, the files in the bundle are displayed in a separate dialogue box.



Note: You cannot open a lesson bundle outside of the TI-Nspire[™] software. For example, if you open the folder using the file manager on your computer and doubleclick the lesson bundle name, it does not automatically launch the TI-Nspire™ software.

Opening Files Within a Lesson Bundle

You can open any file within a lesson bundle on your computer if you have the programme associated with the file type.

- When you open a .tns or .tnsp file, the file opens in the Documents Workspace in the TI-Nspire™ software.
- When you open another file type, it launches the application or programme associated with that file. For example, if you open a .doc file, it opens in Microsoft® Word.

Use one of the following options to open a file within a lesson bundle:


- Double-click the lesson bundle, and then double-click a file within the lesson bundle.
- Within a lesson bundle, select the file and then click ▶ or right-click the file name and select Open.

Managing Files in a Lesson Bundle


You can open, copy/paste, delete and rename files in an existing lesson bundle. To locate and work with files in an existing lesson bundle:

- 1. Choose one of the following options to locate an existing lesson bundle.
 - When working in the Documents Workspace, open the Content Explorer (click In the Documents Toolbox), and then navigate to the folder where the lesson bundle is located.
 - When working in the Content Workspace, navigate to the folder where the lesson bundle is located in Content pane.


Note: When you click a lesson bundle name in the Content pane, the Files dialogue box opens in the Preview pane. Select a file and right-click to open the context menu.

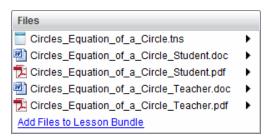

Double-click the lesson bundle name to open the Lesson Bundle dialogue box.

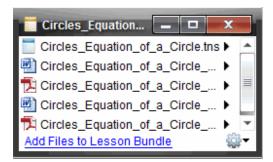

3. Select the file you want to work with and click be to open the context menu.

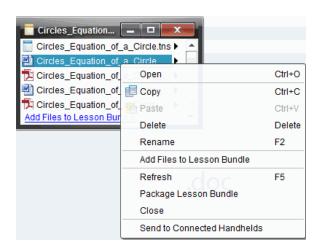

- 4. Click the action you want to perform:
 - Click **Open**. TI-Nspire[™] and PublishView[™] documents open in the Documents Workspace. When you open another file type, it launches the application or programme associated with that file.
 - Click **Copy** to place the file in the Clipboard.
 - Navigate to a folder on your computer or select a connected handheld or laptop, and then right-click and click Paste to place the copied file in a new location.
 - Click **Delete** to delete a file from the lesson bundle. Use caution when deleting a file from a lesson bundle. You should ensure files contained in the bundle are backed up if you need the files for future use.
 - Click Rename to give the file a new name. To cancel this action, press Esc.
 - Click Add Files to Lesson Bundle to select and add files to the bundle.
 - Click **Refresh** to update the list of files in the bundle.
 - Click Package Lesson Bundle to create a .tilb file
 - Click **Send to Connected Handhelds** to open the Transfer Tool and send the selected file to connected handhelds. You can send .tns files and OS files.
- 5. When finished, click **Close** to close the dialogue box.


Managing Lesson Bundles

Use the options menu or the context menu to copy, delete, rename or send a lesson bundle to connected handhelds or laptops. You cannot add a folder to a lesson bundle.

Managing Lesson Bundles in the Documents Workspace

1. Open the Content Explorer, and then right-click the lesson bundle name or click 💝 to open the context menu.




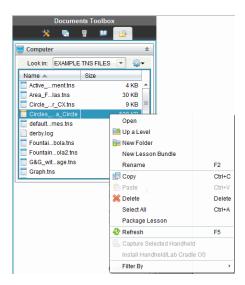

- 2. Click the action you want to perform. If an action is not available, it is dimmed.
 - Click Open to open the lesson bundle.
 - Click **Up One Level** to navigate up a level in the folder hierarchy.
 - You cannot add a folder to a lesson bundle. If you click New Folder, a new folder is added to the folder where the lesson bundle is stored.
 - Click New Lesson Bundle to create a new lesson bundle. The new lesson bundle is not added to the existing lesson bundle—it is created in the same folder as the existing lesson bundle.
 - Click Rename to change the name of the lesson bundle. Press Esc to cancel this action.
 - Click **Copy** to copy the lesson bundle to the Clipboard.
 - Navigate to another folder, and then click **Paste** to copy the lesson bundle in another location.
 - Click **Delete** to delete the lesson bundle. Use caution when deleting a lesson bundle. You should ensure files contained in the bundle are backed up if you need the files for future use.
 - Select All highlights all files in the open folder. This action does not apply to lesson bundles.
 - Click **Package Lesson** to create a .tilb file.
 - Click **Refresh** to update the list of files in the open folder.

Managing Lesson Bundles in the Content Workspace

- Click Local Content in the Resources pane.
- 2. In the Content pane, navigate to the lesson bundle you want to work with, and then right-click to open the context menu or click we to open the menu of options.



3. Select the action you want to perform:

- Click Open to open the lesson bundle.
- Click Copy to place the lesson bundle file in the Clipboard.
- Navigate to a folder on your computer or select a connected handheld, and then right-click and click Paste to place the copied file in a new location.
- Click Delete to delete the lesson bundle. Use caution when deleting a lesson bundle. You should ensure files contained in the bundle are backed up if you need the files for future use.
- Click **Refresh** to update the list of files in the bundle.
- Click Rename to give the lesson bundle a new name. To cancel this action, press Esc.
- To move up a level in the folder hierarchy, click Up a Level.
- To add the lesson bundle to the list of shortcuts in Local Content, click Create Shortcut.
- To add more files to the lesson bundle, click Lesson Bundles > Add Files to Lesson Bundle.
- Click Lesson Bundles > Package Lesson Bundle to create a .tilb file.
- Click Send to Connected Handhelds to open Transfer Tool and send the lesson bundle to connected handhelds.

Packaging Lesson Bundles

Packaging lesson bundles creates a "package" folder with a .tilb file. This file contains all files contained in the lesson bundle. You must package the lesson before you can email the lesson bundle (.tilb file) to colleagues or students. By default, the lesson bundle is saved in the following folder:

...\TI-Nspire\New Lesson Bundle1.tilb\package\...

Packaging a Lesson in the Documents Workspace

- 1. Open the Content Explorer.
- Navigate to the folder where the lesson bundle is saved.

- 3. Select the lesson bundle you want to package.
- Right-click to open the context menu, and then click **Package Lesson**.

The Lesson Bundle dialogue box opens confirming that the .tilb file was created and the lesson bundle was successfully packaged.



5. Click Yes to open the folder where the lesson package is stored. Click No to close the dialogue box.

Packaging a Lesson in the Contents Workspace

- In Computer Content, navigate to the folder that contains the lesson bundle you want to package.
- 2. Click the lesson bundle in the Content pane. The Lesson Bundle details are displayed in the Preview pane.
- 3. Use one of the following methods to create the package:
 - From the Preview pane, click in the Files dialogue box, and then click Package Lesson Bundle.
 - From the Content pane, right-click the lesson bundle name, and then click Lesson Bundles > Package Lesson Bundle.

The Lesson Bundle dialogue box opens confirming that the lesson bundle was created.

4. Click Yes to open the folder where the lesson package is stored. Click No to close the dialogue box.

Emailing a Lesson Bundle

After a lesson bundle is packaged, you can email the .tilb file to other teachers or students. To attach the lesson bundle to an email:

- 1. In your email client, select the option needed to attach a file, and then navigate to the .tilb folder.
- 2. Make sure you open the folder and select the .tilb file to attach to the email. You cannot email the .tilb folder.

Sending Lesson Bundles to Connected Handhelds

- 1. Complete one of the following actions to select a lesson bundle:
 - In the Documents Workspace, open the Content Explorer, and then select the lesson bundle you want to send.
 - In the Content Workspace, navigate to the lesson you want to send in the Content pane.

Drag the lesson bundle file to a connected handheld. You can also copy the lesson bundle and then pasts it to a connected handheld.
bundle, and then paste it to a connected handheld. The lesson bundle is transferred to the handheld as a folder with the same name. Only
.tns files are transferred to the handheld.
132 Working with Lesson Bundles

Capturing Screens

Screen Capture enables you to:

Capture Page

- Capture the active page in a TI-Nspire[™] document from the software or from the TI-SmartView™ emulator as an image.
- Save captured images as .jpg, .gif, .png, or .tif files, which can be inserted into TI-Nspire[™] applications that allow images.
- Copy and paste images into another application such as Microsoft® Word.

Capture Selected Handheld

- Capture the current screen on a connected handheld as an image.
- Save captured images as .jpg, .gif, .png, or .tif files, which can be inserted into TI-Nspire[™] applications that allow images.
- Copy and paste images into another application such as Microsoft® Word.

Capture Images in hand-held Mode

- In the Documents Workspace, use the DragScreen feature to capture the emulator screen or side screen when the TI-SmartView™ Emulator is active.
- Teachers can use this feature to drag and paste an image to presentation tools such as SMART® Notebook, Promethean's Flipchart and Microsoft® Office applications including Word and PowerPoint®.

With TI-Nspire™ CX Navigator™ enabled you can also:

Capture Class

- View and monitor all student screens at one time, which allows you to ensure all students are on track with an assignment.
- Capture one or several student screens for discussion in the classroom. You can hide student names to focus the discussion on the lesson or concept, and not on individuals.
- Select and display an individual student screen and view work as a live presentation.
- Capture screen stacks that enable you to check student progress or collect student assignments for later review.
- Save captured images as .jpg, .gif, or .png files, which can be inserted into TI-Nspire[™] applications that allow images.

Accessing Screen Capture

The Screen Capture tool is available from all workspaces. To access Screen Capture:

- From the menu bar, click **Tools** > **Screen Capture**.
- ► From the toolbar, click .

Using Capture Page

Use the Capture Page option to capture an image of an active page in a TI-Nspire™ document. You can save images in the following file formats: .jpg, .gif, .png and .tif. Saved images can be inserted into TI-Nspire™ applications that allow images. The image is also copied to the Clipboard and can be pasted into other applications such as Microsoft® Word or PowerPoint®.

Capturing a Page

Complete the following steps to capture an image of an active page.


- 1. In the Documents Workspace, open a document and navigate to the page you want to capture to make it active.
- 2. Click im, and then click Capture Page.

The image of the active page is copied to the Clipboard and to the Screen Capture window. The Screen Capture taken. Viewit. * dialogue box opens in the lower right corner of your desktop when the screen capture is complete.

3. Click View it.

The Screen Capture window opens.

You can also click Window > Screen Capture Window to open the Screen Capture window.

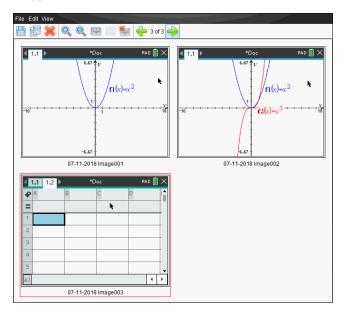

4. To capture additional pages, move to another page in the current document or open a new document to select a page.

As you capture additional pages, the images are copied to the Screen Capture window, which holds multiple images. The last page captured replaces the contents of the Clipboard.

Using Capture Selected Handheld

Use the Capture Selected Handheld option to capture the active screen on a connected handheld.

- 1. On a connected handheld, navigate to the menu or to a page in a document you want to capture.
- 2. In the software, select the connected handheld:
 - In the Content Workspace, select the handheld from the list of Connected Handhelds in the Resources pane.
 - In the Documents Workspace, open Content Explorer from the Documents Toolbox, and then select the handheld from the list of Connected Handhelds.
 - In the Class Workspace, select a logged in student.
- 3. Click . and then click Capture Selected Handheld.

-or-

Click , and then click Capture Selected Handheld.

The screen is copied to the Clipboard and to the TI-Nspire™ Screen Capture

window. The Screen Capture taken. Viewit. * dialogue box opens in the lower right corner of your desktop when the screen capture is complete.

4. Click View it.


The Screen Capture window opens.

You can capture additional screens from an open document on a connected handheld or open another document on a connected handheld to capture screens from that document.

As you capture additional screens, the images are copied to the Screen Capture window, which holds multiple images. The last screen captured replaces the contents of the Clipboard.

Viewing Captured Screens

When you capture a page or screen, it is copied to the Screen Capture window.

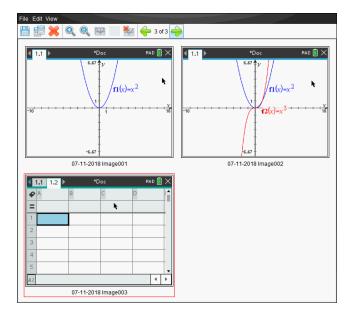

Zooming the View of Captured Screens

In the Screen Capture window, use the zoom in and zoom out options to increase or decrease the size of the captured screens.

- From the toolbar, click to increase the size of the screens in the view. You can also click **View > Zoom In** from the menu.
- From the toolbar, click to decrease the size of the screens in the view. You can also click **View > Zoom Out** from the menu.

Saving Captured Pages and Screens


You can save captured pages and screens captured as images for use in other TI-Nspire™ documents that allow images or for use in other applications such as Microsoft® Word. You can save one image at a time, select multiple images to save or save all captured images.

Saving Selected Screens

- 1. In the Screen Capture window, select the screen image you want to save.
- 2. Click File > Save Selected Screen(s).

Note: From the Screen Capture window, you can also click

The Save as dialogue box opens.

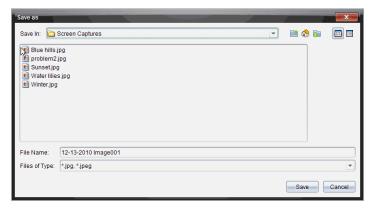

- Navigate to the folder on your computer where you want to save the file.
- 4. Type a name for the file.

Note: The default file name is MM-DD-YYYY Image ###.

- 5. Select the file type for the image file. The default format is .jpg. Click ▼ select another format: .gif, .tif or .png.
- 6. Click Save.

The file is saved in the designated folder.

Saving Multiple Screens

1. In the Screen Capture window, select the screens you want to save.

To select multiple consecutive screens, click the first image, and then hold down the **Shift** key and click the additional images. To select screens in random order, press Ctrl (Mac $^{\circ}$: \mathcal{H}) and click each image you want to save.

or select File > Save Selected Screen(s). To save all captured screens, select File > Save All Screens.

Note: The "Save All Screens" option is not available when using Capture Class.

The Save as dialogue box opens.

- In the Save In field, navigate to the folder where you want to save the images.
- 4. In the File Name field, type a new folder name. The default folder name is MM-DD-YYYY Image, where MM-DD-YYYY is the current date.
- 5. Select the file type for the image files. The default format is .jpg. Click ▼ to select another format: .gif, .tif, or .png.
- 6. Click Save.

The images are saved in the specified folder with system-assigned names reflecting the current date and a sequence number. For example, MM-DD-YYYY Image 001.jpg, MM-DD-YYYY Image 002.jpg and so on.

Copying and Pasting a Screen

You can select a captured screen and copy it to the Clipboard for inclusion into other documents or applications. You can also print copied screens. Copied screens are captured at 100% zoom level, and they are copied in the order of selection.

Copying a Screen

- 1. Select the screen to copy.
- 2. Click or Edit > Copy.

The selected screen is copied to the Clipboard.

Pasting a Screen

Depending on the application you are pasting to, click Edit > Paste.

Note: You can also drag a screen capture to another application. This functions as a copy and paste.

Capturing Images in Handheld Mode

In the Documents Workspace, use the DragScreen feature to capture the emulator screen or side screen when the TI-SmartView™ Emulator is active.

Teachers can use this feature to drag and paste an image to presentation tools such as SMART® Notebook, Promethean's Flipchart and Microsoft® Office applications including Word and PowerPoint®.


Capturing Images Using the DragScreen Feature

Complete the following steps to capture an image and copy it to a third-party application.

1. From the Documents Workspace, click , which is located in the Documents Toolbox.

The TI-SmartView™ Emulator opens.

- If the display selected is **Handheld + SideScreen**, the current document is shown in the emulator and in the side screen.
- If the display selected is **Keypad + SideScreen**, the current document is shown in the side screen.

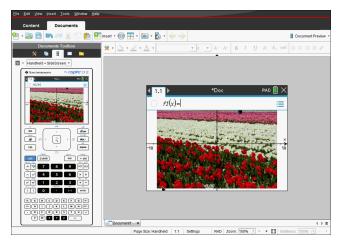

2. To start the screen capture, click the area above the emulator screen or above the keypad. In the Handheld + SideScreen display, you can also click the area around the emulator screen.

Do not release the mouse button. If the cursor is active or if you click inside the emulator window, the screen capture is not started.



In Handheld + SideScreen view, click the area above the emulator, click the area around the emulator or click the border of the emulator screen to start the screen capture.




In Keypad + SideScreen view, click the area above the keypad to start the screen capture.

3. Without releasing the mouse, drag the image.

A ghost image of the captured screen opens. The ghost image remains visible until vou release the mouse button.

in the corner of the ghost image indicates you cannot paste the image in that location.

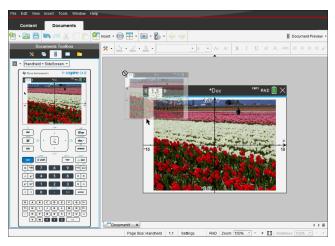

- 4. Drag the image to an open third-party application. When the image is on top of the + indicates you can drop the image. third-party application, the
- 5. Release the mouse button to drop the image into the selected application.

The image is also copied to the Clipboard and to the TI-Nspire™ Screen Capture window.

To view captured images in the Screen Capture window, click Window > Screen Capture Window.

You can capture additional screens as needed. As you capture additional screens, the images are copied to the Screen Capture window, which holds multiple images. The last screen captured replaces the contents of the Clipboard.

Using Capture Class


In the classroom, use the Screen Capture tool to view and capture student screens. You can capture the screen of one selected student, of multiple selected students or of all the students in the class.

Note: To view and capture student screens, they must be logged in to class.

Capturing Student Screens

- 1. If you have not already done so, begin the class session and ask your students to log in.
- 2. Click and then click Capture Class.

The Select Individual(s) dialogue box opens. If you selected students in Class Workspace, those student names are highlighted. If no students were selected, all student names in the class are selected.

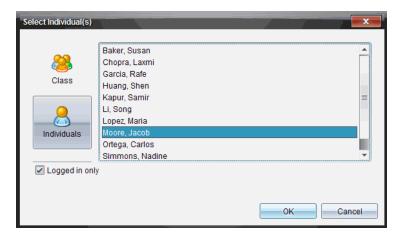


- 3. To change the selected student or add more students:
 - to display the screens of all students in the class. If a student is not logged in, the handheld display indicates "Not Logged In". As students log in, click refresh to update your screen.
 - . and then click the name of each student to display the screens of individual students. To select multiple students, hold down the **Shift** key. To select students in random order, hold down the Ctrl key (Mac®: X) and click each student name.
 - Select the **Logged in only** checkbox under the left pane to display screens from only those students currently logged in. When you refresh your screen, any students who log in after the initial screen capture will be listed at the end of the Class Screen Capture window.

4. Click OK.

The screens of the selected students are displayed in the Class Screen Capture window.

Note: The following example shows the screens from two selected students who are logged in. The default view is Tiled, which shows all screens captured in the window.

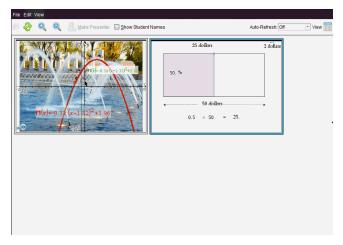

5. Decide if you want to display or hide the student names. To hide or show student names, select the checkbox on the toolbar to toggle between hide and show or click View > Show Student Names.


Note: Your selection to show or hide student names remains in effect until you change it. For example, if you select to hide student names, the student names will remain hidden when you close the Class Screen Capture window and return to the Class Workspace. If you select to hide student names in the Class Workspace, they will be hidden when the Class Screen Capture window opens.

Setting Teacher Preferences for Capture Class

Use the Teacher Preferences option to set preferences for using the randomise screen option and for displaying the teacher handheld. Creating a user name and password enables teachers to log in to an active class. You can also select to individualise the view of your handheld screen when it is displayed. For more information, see the handheld guidebooks oneducation.ti.com/guides.

From the TI-Nspire™ Navigator™ Teacher Software window, click File > Settings > Teacher Preferences.

The Teacher Preferences dialogue box opens.

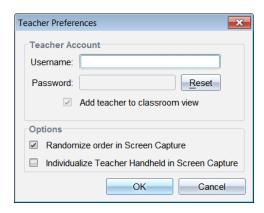

- 2. If you haven't already done so, create a Username and Password.
- 3. Select "Add teacher to classroom view" to show your handheld in the Class Screen Capture window.
- 4. To randomise the order in which screens are captured, select "Randomise order in Screen Capture".
- 5. Select the "Individualise Teacher Handheld in Screen Capture" option so that a captured screen from the teacher handheld appears differently in the Class Screen Capture window than screens captured from student handhelds.
- 6. Click **OK** to save the settings.

Setting View Options in Capture Class

You have several options for optimising the view of captured class screens, including:

- Toggling between a tiled view and a gallery view.
- Comparing selected screens in a side-by-side view.
- Refreshing the view as needed or setting the auto-refresh feature to automatically refresh the view at timed intervals.
- Zooming in or out to increase or decrease the size of the captured screens in the window. You can also select the percentage at which the size of the screen will be increased or decreased.
- Showing or hiding student names.
- Accessing Live Presenter options. For more information, see *Using Live Presenter*.


Toggling Between Tiled and Gallery Views

When you capture student screens, the default view for the Class Screen Capture window is Tiled. Switch to Gallery view to show an enlarged view of a selected screen. Thumbnail views of all the captured screens are shown in the left pane, enabling you to find and select screens.

To toggle between Tiled and Gallery views:

- Click View , and then click Gallery or Tiled.
 - -or-
- From the View menu, select Gallery or Tiled.
 - -or-
- For Gallery view, press Ctrl + G. (Mac®: ℋ + G). For Tiled view, press Ctrl + T (Mac®: ℋ + T).

In Gallery view, thumbnail images of captured screens are displayed in a column in the left pane of this view. An enlarged view of a selected screen is displayed in the right pane.

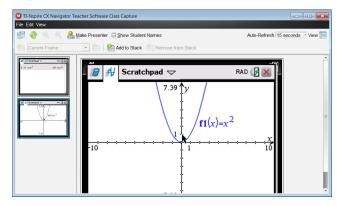

- If you select multiple thumbnails to view in the left pane, they are displayed in the right pane.
- If you select more than four thumbnails, view the additional screens by scrolling down the right pane.
- If you selected to show student names, names are centred under each student's captured screen.
- Zoom functions are disabled in Gallery View.
- You can change the order of the screens in the Gallery View.
- The width of the thumbnail pane cannot be changed.

Rearranging Captured Screens

Changing the order of captured screens in one view (Tiled or Gallery) automatically

changes it in the other view.

- In Tiled view, drag the screen to its new position.
- In Gallery view, drag the screen's thumbnail up or down to its new position.

As you drag, a vertical bar shows the point at which the screen will be inserted.

Note: To cancel the move before releasing the mouse button, press Esc.


Refreshing Captured Screens

As students log in to class and work on their screens, you might want to update the captured screens.

Refreshing Screens Manually

Click Refresh 🔡.

Note: If a student has lost connection and a screen cannot be refreshed, it is outlined in yellow.

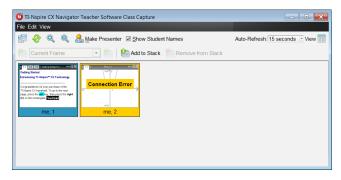

Refreshing Screens Automatically

The auto-refresh feature recaptures class screens at timed intervals. The default setting for the auto-refresh feature is Off. To enable auto-refresh:

On the View menu, click Auto Refresh, and select a time interval.



Zooming in and Zooming out

In the Tiled view only, you can magnify or shrink the views of the captured screens.


► To zoom to levels between 50% and 400% in 50% increments:

Click Zoom In \P or Zoom Out \P on the toolbar.

-or-

Click View > Zoom In or View > Zoom Out from the menu.

► To zoom to a selected level, click **View > Zoom Percentage**, and select the level.

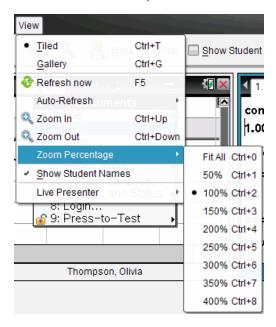

Creating Stacks of Student Screens

This feature enables you to collect a history of one or more students' screens captured in the Capture Class option. These collections are called stacks, and you can add or remove screens from each student's stack, as well as navigate within and through student stacks. Using stacks is a convenient way to check progress in a lesson, collect student presentations or assignments to review and mark later, or to show performance and progress in parent/teacher meetings.

You add, remove, navigate and save stacks from the Class Capture window, which becomes available when you use the Capture Class option.

► To open the Class Capture window, click Window > Class Capture Window.

Adding Screens to a Stack

In the Class Capture window, click View > Stacks > Add to Stack, or click



To add another set of screens, first click Refresh . and then add the stack.



When the first set of screens is added to a new stack, it is labelled Frame1. Each subsequent addition increases the number by one; for example, Frame2, Frame3 and so forth.

Removing Frames from a Stack

- 1. Select the frame you want to remove.
- 2. Click View > Stacks > Remove from Stack. or click



As frames are removed from a stack, their names are adjusted to remain sequential and reflect the deletion. For example, if Frame6 is deleted, Frame7 is renamed to Frame6 and all subsequent frame numbers are adjusted downward by one digit.

Navigating Through Stacks

You can navigate a stack of frames from either the tiled or gallery view.

- To view different frames in a stack, use one of these options:
 - Click the drop-down arrow, and then click the desired frame from the list.
 - View > Stacks > Next Frame. or click
 - View > Stacks > Previous Frame. or click

Note: These options are available only if there is a next or previous frame to view.

Saving Stacks

When you close the Class Capture window, the software asks if you want to save the stacks.

1. Click Yes to save the stacks.

The Select or Create Folder to Save Stacks dialogue box opens.



Click **Save** to save the stacks in the default folder, or create or navigate to another folder, and then click Save.

The stacks are saved as individual screen captures with the student's name, image number, date and time. For example:

```
Laxmi Chopra_image1_10-21-2011_11-50
Laxmi Chopra_image2_10-21-2011_11-57
```

Use the Content Workspace or your computer's file management system to locate and open the saved screens.

The screens open in the default photo viewer on your computer.

Comparing Selected Screens

This feature enables you to compare student screens side-by-side.

1. Select the student screens you want to compare. To select multiple consecutive screens, hold down the **Shift** key. To select screens in random order, hold down the **Ctrl** key (Mac®: 光) and click each image you want to save. When you select each screen, the border changes colour.

Note: If you select more than four screens, scroll down the viewing pane to see them.

2. Click Edit > Compare Selected.

If you are in Tiled view, the view switches to Gallery view and the selected screens are listed in the order selected.

Note: This option is disabled when in Gallery view.

To exit comparison mode, click outside the screen in the left pane of the Gallery view.

Using Make Presenter

Select a captured screen from the Class Screen Capture window, and then click the **Make Presenter** option on the toolbar to launch Live Presenter and present a student screen to the class. You can only choose one student at a time to be the Live Presenter. For more information, see *Using Live Presenter*.

Saving Screens When Using Capture Class

You can save captured screens for use in other TI-Nspire™ documents that allow images or for use in other application such as Microsoft® Word. You can save images in the following formats: .jpg, .png or .gif. You can save one image at a time, select multiple images to save or save all captured images.


Saving Screen Images

To save screen images captured when using Capture Class, complete the following steps.

1. In the Class Screen Capture window, select the screen or screens you want to save as image files.

- To select multiple consecutive screens, click the first image, and then hold down the **Shift** key and click the additional images. To select screens in random order, hold down the **Ctrl** key (Mac[®]: \mathcal{H}) and click each image you want to save.
- To select all captured screens, click Edit > Select All.
- 2. Click File > Save Selected Screen(s) or press Ctrl + S (Mac[®]: \mathcal{H} + S).

The Save dialogue box opens.

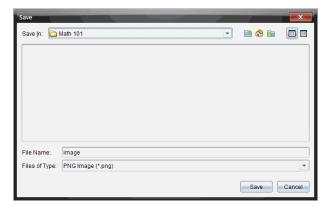

- Navigate to the folder on your computer where you want to save the file(s). 3.
- Type a name for the file or files in the File Name field.

The default file name is Image.

- 5. In the Files of Type field, click , and then select the file type: .png, .jpg or .gif. The default file type is .jpg.
- 6. Click Save.

The file or files are saved in the designated folder.

- If you saved one image, the file is saved with the name as specified in the File Name field.
- If you saved multiple images, the files are saved with the name specified in the File Name field with a number appended to the file name to make each file name unique. For example, *Image 1*, *Image 2* and so on.

Printing Captured Screens


You can print screens captured using the Capture Class option. You can print one, multiple or all captured screens. For each printed page, the class name is printed in the page header and the date and page number are printed in the page footer.

Note: The print option is not available when using the Capture Page or Capture Selected Handheld options.

To print a captured screen:

- 1. Select the screen you want to print.
- 2. Click File > Print.

The Print dialogue box opens.

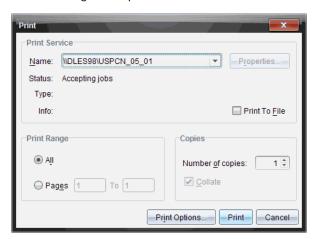

3. If you selected more than one screen, click **Print Options** to select the number of screen captures that you want per page.

The Print Options dialogue box opens.



- Select options as needed. You can select to print one screen per page, six screens per page or all screens on the page. You can also select whether to print student names.
- 5. Click **OK** to return to the Print dialogue box.
- 6. Select the individual printer options for your printer.
- 7. Select the number of copies you want to print.
- 8. Click **Print** to send the print job to the selected printer.

Working with Images

Images can be used in TI-Nspire™ applications for reference, assessment and instructional purposes. You can add images to the following TI-Nspire™ applications:

- Graphs & Geometry
- Data & Statistics
- Notes
- Question, including Quick Poll

In the Graphs & Geometry and Data & Statistics applications, images are set in the background behind the axis and other objects. In the Notes and Question applications, the image is set at the cursor location in-line with the text (in the foreground).

You can insert the following image file types: .jpg, .png or .bmp.

Note: The transparency feature of a .png file type is not supported. Transparent backgrounds are displayed as white.

Working with Images in the Software


When working in the TI-Nspire™ software, you can insert, copy, move and delete images.

Inserting Images

In the Notes and Question applications, and in Quick Poll, you can insert more than one image on a page. You can only insert one image on a page in the Graphs & Geometry and Data & Statistics applications.

- 1. Open the document where you want to add an image.
- 2. Click Insert > Image.

The Insert Image dialogue box opens.

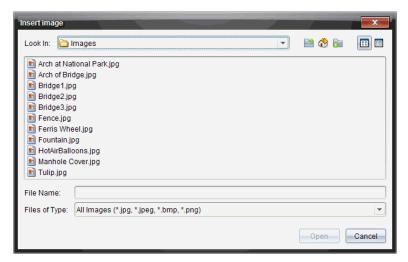

- Navigate to the folder where the image is located and select the image.
- 4. Click Open.
 - In the Graphs & Geometry and Data & Statistics applications, the image is inserted in the background behind the axis.
 - In Notes, Question and Quick Poll, the image is inserted at the cursor location. You can type text above or below the image, and you can move the image up or down on the page.

Note: You can also insert images by copying an image to the Clipboard and pasting it into the application.

Moving Images

In applications such as Notes and Question where the image is set at the cursor location, you can reposition the image by moving the image to a new line or blank space, or by placing the image within a line of text. In the Graphs & Geometry and Data & Statistics applications, images can be moved to any position on the page.

- Select the image.
 - In the Notes and Question applications, click the image to select it.
 - In the Graphs & Geometry and Data & Statistics applications, right-click the image and then click Select > Image.
- 2. Click the selected image and hold the mouse button.
 - If an image is in the foreground, the cursor changes to $^{f t}$.
 - If an image is in the background, the cursor changes to

Drag the image to the new location and release the mouse button to place the image.

If an image is in the foreground, the cursor changes to a when you hover your mouse pointer over a location where there is a new line or space. Images in the background can be moved and placed anywhere on the page.

Resizing Images

To retain the aspect ratio of an image, resize by grabbing the image at one of the four corners.

- Select the image.
 - In the Notes and Question applications, click the image to select it.
 - In the Graphs & Geometry and Data & Statistics applications, right-click the image and then click Select > Image.
- Move the cursor to one of the corners of the image.

The cursor changes to $\stackrel{\bullet}{\longrightarrow}$ (a four-sided directional arrow).

two-sided directional arrow). If you drag an image from one of its edges to resize it, the image becomes distorted.

3. Click the corner or edge of the image.

The a tool is enabled.

- Drag in to make the image smaller or drag out to make the image larger.
- Release the mouse when the image size is correct.

Deleting Images

To delete an image from an open document, complete the following steps.

- 1. Select the image.
 - If an image is in the foreground, click the image to select it.
 - If an image is in the background, right-click the image and then click Select > Image.
- 2. Press Delete.


The image is removed.

Using Question in the Teacher Software

The Question application in the Teacher Software allows you to author multiple choice, open response, equation, expression, coordinate points, lists, image and chemistry auestions.

Although students cannot author questions, they can open documents containing questions, answer these questions and, in Self-Check mode, check their work.

The Question application is located on the Insert menu in the Documents Workspace.

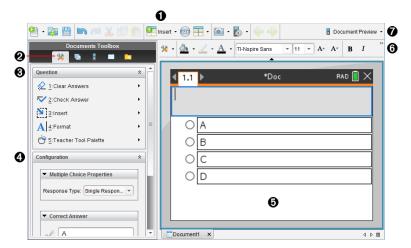

- Insert menu. Click Insert and select Question to add a question, or select Image to add an image to a question.
- **Document Tools.** Click this icon to open the toolbox pane.
- **Question tool.** Provides a menu of tools available for working with the Question application.
- Configuration tool. Allows you to set certain properties for each question you insert.
- **Question area.** This is where you type questions and view student responses.
- **A** Formatting toolbar. Allows you to apply formatting to text.
- **Document Preview.** View the document in Handheld or Computer mode. The preview changes, but the page size does not. For more information on Document Preview, see Working with TI-Nspire™ Documents.

Understanding the Question Tools

When you add a question, the Question application opens. If necessary, click Document

to open the tools menu.

Note: The Teacher Tool Palette is not available to students.

Tool name		Tool function
&	Clear Answers	Lets teachers or students clear the answers in the current question or in the document.
√	Check Answer	If you select Self-Check as the document type in the Question Properties dialogueue box, students can check their answer to the question.
	Insert	Lets teachers or students insert an expression box or chemical equation box into the question or answer.
A	Format	Lets teachers or students format the selected text as subscript or superscript. (The chemical equation box uses its own formatting tool, so this Format tool does not work in the chemical equation box.)
Ó	Teacher Tool Palette	Lets you add copyright information and set the document type as Self-Check or Exam.

Using the Insert Menu

The Insert menu in the Document Tools lets you add maths expression boxes and chemical equation boxes to the Question area, Suggested Response area, or

Correct Answer area of some question types. When you are in question types that allow maths expressions or chemical equations, place your cursor where you want to insert the box, and then follow these steps.

- 1. Open the Question tool.
- 2. Click Insert > Expression Box or Chem Box.

The software inserts a blank box where your cursor is positioned.

3. Type the desired maths expression or chemical equation, and then click outside of the box to continue typing text.

Using the Teacher Tool Palette


The Teacher Tool Palette allows you to add copyright information and set the document type as Self-Check or Exam.

Adding Copyright Information

Use the Question Properties dialogue box to add copyright information to the current question.



The Question Properties dialogue box opens.



2. Type the author's name and move to the Copyright field.

Note: TI-Nspire™ software allows you to use questions from more than one author in the same document. Therefore, the information that you enter about the author and copyright is not global. You must enter the relevant information for each different question.

- 3. Select whether the question is public domain or has a copyright assigned to it and move to the Year field.
- 4. Type the year the question was copyrighted and move to the Owner field. If you are copyrighting a new question, type the current year (example: 2012).
- 5. Type the name of the person or entity that owns the copyright.
- 6. Click OK.

Setting Self-Check and Exam Document Types

When you define a document as Self-Check or Exam, all of the questions in that document will be either Self-Check or Exam.

- When you define the document type as Self-Check, students can check the answers against the answers provided by the teacher.
- In Exam mode, when you enter a suggested response to a question, students cannot check the answers. You can use Exam mode to automatically grade student responses.
- > Question Properties. 1. Click the Teacher Tool Palette icon
- 2. In the Document Type field, click Exam or Self-Check.
- 3. Click OK.

Understanding the Configuration Tool

The Configuration tool allows you to set properties specific to each question type you insert. Properties include the response type, the number of responses (if applicable), the correct answer and other options.


For example, you can specify the correct answer to a question, and set the scale, axes and grid on a graph. You can add a 2D maths expression on the question types that contain a Correct Answer field.

Each question type has a unique set of options. The options are explained for each question type in the Adding Questions section.


The configuration settings are retained when you copy and paste a question from one document to another.

Adding Configuration Options

1. Click the down arrow on the Configuration bar in the Documents Toolbox to open the Configuration tool.

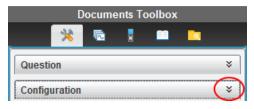

Click the down arrow next to the choices you want to edit, and type the applicable text.

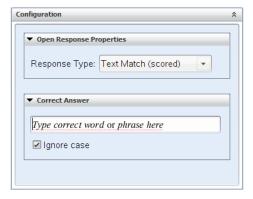

3. Close the Configuration panel. The options you chose are saved when you save the document.

Formatting Text and Objects

Use the text formatting tools to format text in sections of questions that allow text input.

The formatting toolbar also contains the Document Tools 🍍 icon to provide easy access to the Question and Configuration tools.

For more information on formatting text and objects, see *Working with TI-Nspire* $^{\text{\tiny{M}}}$ *Documents*.

Adding Images to Questions

You can add images to the Question Text Area of most questions. On some question types, you can add an image in the Student Answer or Suggested Response Area of a question.

Adding images provides a visual aid to help explain the context of the question, or as a background on a graph.

Choose the image from a set of images on your computer, or copy and paste an image from a different application into the Question Text Area. For more information, see *Working with Images*.

Image Types Available

The following file types can be used in the Question application:

- .jpg
- .jpeg
- .bmp
- .png

Note: The transparency feature of .png is not supported. Any transparent .png backgrounds will appear as white.

Adding Images Using the Insert Command

1. Click Insert > Image.

The Insert Image dialogue box opens.

- Navigate to the location of the image and select it.
- 3. Click Open.

The image appears in the question.

Adding Images Using the Clipboard

To copy an image to the Clipboard from a TI-Nspire[™] document, image file, or another programme, press Ctrl + C (Mac®: $\mathcal{H} + C$).

To paste the image into the question, press Ctrl + V (Mac[®]: \mathcal{H} + V).


Adding Questions

You can add the following types of questions:

- Multiple Choice
 - Custom
 - ABCD

- True/False
- Yes/No
- Always/Sometimes/Never
- Agree/Disagree
- Strongly Agree...Strongly Disagree
- Open response
 - Explanation (not auto-graded)
 - Text Match (auto-graded)
- **Equations and Expressions**
 - y=
 - f(x)=
 - Expression
- Coordinate Points and Lists
 - (x,y) numerical input
 - Drop Point(s)
 - List(s)
- **Image**
 - Label
 - Point on
- Chemistry


When you select a guestion type, a brief explanation of the guestion is displayed at the bottom of the Choose Question Type dialogue box.

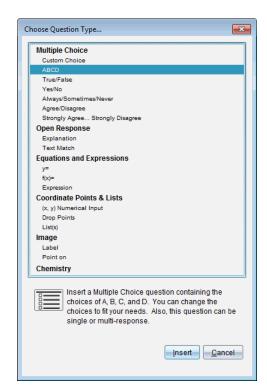

When you open a question template, the cursor is in the Question text area.

Adding a Multiple Choice Question

This example shows how to add a custom multiple choice question. A custom multiple choice question allows you to specify answers your students can select. You can then select one or more responses as correct to help you when grading or to help students check questions that are in Self-Check mode.

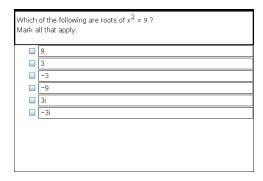

To add a custom multiple-choice question:

Click Insert > Question.

The Choose Question Type dialogue box opens.

- Click **Custom Choice** under the **Multiple Choice** heading.
- 3. Click Insert.

The Custom Choice template opens with the cursor in the Question text area.

Two response options exist in the template by default.

- 4. Type the question.
 - You can type any combination of text, maths expressions and chemical equations in the Question Area and Suggested Response area.
 - You can add an image in the question text area.
- 5. Press Enter to add another question line, or press Tab to go to the first Correct Answer button.
- 6. Type the response options. Add an image, if desired.
- 7. Press **Enter** to add other response options, and add the response text.
 - Press **Delete** to clear or delete a response.
 - Press **Backspace** to delete an empty response line.
- 8. Click the option next to a suggested response, if desired.

Note: In Self-Check mode, the student can check their answer against the suggested response.

9. Open the Configuration tool. Choose the response type, and click the option that corresponds to the correct answer.

Adding an Open Response Question

An open response question prompts the student to write a response. An explanation question type allows students to respond without any predefined answers. A text match question type allows the teacher to specify an answer for the student response. Text match questions are automatically graded; open response questions are not automatically graded.

One word that describes two lines that never meet but are in the sam plane:	е
Student: Type response here.	

This example shows how to add an explanation question.

Click Insert > Question.

The Choose Question Type dialogue box opens.

- Click Explanation under Open Response.
- Click Insert.


The Open Response template opens with the cursor in the Question text area.

- 4. Type the question.
 - You can type any combination of text, maths expressions and chemical equations in the Question Area and Suggested Response area.
 - You can add an image in the question text area.
 - Press **Tab** or use the mouse pointer to navigate between fields.
- 5. Open the Configuration tool. Select the response type as Explanation or Text Match, and type the correct answer.
 - The Explanation response type allows students to give answers that closely match your suggested response.
 - The Text Match response type requires students to exactly match your suggested response. Select the Ignore Case check box if capitalization is not important.
 - You can type any combination of text, maths expressions and chemical equations in the Correct Answer area.

Adding an Equation Question

An equation question prompts the student to write an equation in the form of y= or f (x)=, or to respond with a number or expression.

This example shows how to add a y= question.

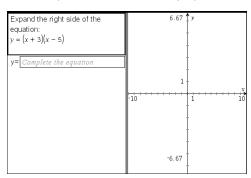

1. Click Insert > Question.

The Choose Question Type dialogue box opens.

2. Select y= under Equations and Expressions.

Click Insert.

The equation template opens with the cursor in the Question text area.

- 4. Type the question.
 - You can type any combination of text, maths expressions and chemical equations in the Question Area.
 - You can add an image in the question text area.
 - Press **Tab** or use the mouse pointer to navigate between fields.
- Enter a suggested response, if desired.
- 6. Press Enter to add other response options, and add the response text.
 - Press **Delete** to clear or delete a response.
 - Press **Backspace** to delete an empty response line.
- 7. Open the Configuration tool to set the number of responses, the correct answer and whether the students should show their work. You can also add a graph that will show in the Question area.



- The number of responses can range from 1 to 5.
- The Show your work option includes areas for the students to write their starting point, their steps and their final answer. The option to show work is disabled if multiple responses are allowed.
- To add a graph in the Question area, check Include a Graph Preview. The Question text area splits to show a graph on the right.
- When you are in the graph, the Graphs & Geometry toolbox is available to allow you to add functions.

Note: Only the teacher can edit the graph. Students can only view and zoom the graph.

- Click to add additional fields for multiple correct answers. For example, you might want to accept both y=(x+1)(x+2) and y=(x+2)(x+1) as correct answers.
- Select whether or not to accept equivalent responses as correct.
 - If you do not check Accept equivalent responses as correct, the student response is marked correct if it is an exact text match to one of the accepted responses you entered.
 - If you do check **Accept equivalent responses as correct**, the student response is marked correct if it is equivalent to any accepted response you entered. For example, if you typed x+2 as the correct answer, and the student submits 2+x, this response is equivalent to the accepted response and is automatically graded as correct. Spaces, case differences and extra parentheses are ignored when the software evaluates student answers. For example, y=2x+1 is evaluated the same as Y = 2X + 1.

Adding an Expression Question

An expression question prompts the student to respond with a number value or an expression.

The dog walker earns \$12 per hour, and she spends \$2 on gas getting to and from her client's house. She walks the dog for 30 minutes each day. Write an expression showing how much money she earns in one day.
Enter expression

Click Insert > Question.

The Choose Question Type dialogue box opens.

- 2. Click Expression under Equations and Expressions.
- Click Insert.

The expression template opens with the cursor in the Question text area.

- 4. Type the question.
 - You can type any combination of text, maths expressions and chemical equations in the Question area.
 - You can add an image in the Question area.
- 5. In the Expression type response, enter a starting expression, if desired. The student sees the starting expression.
- 6. Enter a suggested response, if desired.

- If you set the response type as Number, the response fields are maths boxes and accept only number values such as 1/3.
- If you set the response type as Expression, the response fields are expression boxes and accept only expression inputs such as 2(3+5).
- 7. Open the Configuration tool to set the response type as Number or Expression, set whether or not the students should show their work and enter a correct answer. You can also set a tolerance for Number types, or equivalent responses for Expression types.




- The Show your work option includes areas for the students to write their starting point, their steps and their final answer.
- In the Number type response, enter the accepted numerical response and the tolerance. Student responses are marked correct if they fall within the tolerance interval you specify.
- Specifying a tolerance of zero indicates you are looking for the exact number answer. Not specifying a tolerance is the same as specifying a tolerance of
- Student answers are considered correct if they are numerically equivalent to the correct answer. Spaces, case differences and extra parentheses are ignored when the software evaluates student answers.
- In the Expression type response, you can add additional fields (up to 10) for multiple correct answers.
- In the Expression type response, click it to open the Templates and Symbols catalogue that allows you to enter 2D maths expressions.
- In the Expression type response, you can select whether or not to accept equivalent responses as correct.
 - If you do not check Accept equivalent responses as correct, the student response is marked correct if it is an exact text match to one of the accepted responses you entered.

If you do check Accept equivalent responses as correct, the student response is marked correct if it is equivalent to any accepted response you entered. For example, if you typed x+2 as the correct answer, and the student submits 2+x, this response is equivalent to the accepted response and is automatically graded as correct. Spaces, case differences and extra parentheses are ignored when the software evaluates student answers. For example, x+2 is evaluated the same as X + 2.

Important: Students can enter the starting expression you supply and have this response automatically graded as correct. For example, if you ask students to factor $x^2-7x+12$ and stipulate the correct answer is (x-3)(x-4). the student can submit a response of $x^2-7x+12$. This response is automatically graded as correct because it is equivalent to the accepted answer. You must manually mark this student response as incorrect in either the Review or Portfolio Workspaces. See the chapters for those workspaces for more information on marking and grading responses.

Adding an (x,y) Numerical Input Question

An (x,y) numerical input question prompts the student to respond with a coordinate.

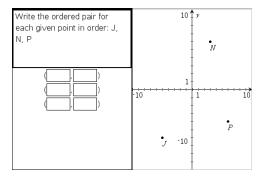

Click Insert > Question.

The Choose Question Type dialogue box opens.

- 2. Click (x,y) Numerical Input under Coordinate Points & Lists.
- 3. Click Insert.

The template opens with the cursor in the Question text area.

- 4. Type the question.
 - You can type any combination of text, maths expressions and chemical equations in the Question area.
 - You can add an image in the Question area.
 - Press **Tab** or use the mouse pointer to navigate between fields.
- 5. Enter a suggested response, if desired.
 - The response fields are expression boxes and accept only expression inputs.

- 6. Press Enter to add other response options (up to five), and add the response text.
 - Press **Delete** to clear or delete a response.
 - Press **Backspace** to delete an empty response line.
- 7. Open the Configuration tool to set the number of points, add a graph preview, enter a correct answer, and set equivalent responses as correct.



- The number of points can range from 1 to 5.
- Click to add additional fields for multiple correct answers. You can type any combination of text, maths expressions and chemical equations in the correct answer fields.
- Click to open the Templates and Symbols catalogue that allows you to enter 2D maths expressions.
- To add a graph in the Question area, select Include a Graph Preview. The Question text area splits to show a graph on the right and the student prompt area on the left. To change the location of the graph, click the down arrow next to **Prompt Location** and choose the desired location for the graph in the student prompt area.
- When you are in the graph, the Graphs & Geometry tools are available to allow you to add functions.


Note: Only the teacher can edit the graph. Students can only view and zoom the graph.

- Select whether or not to accept equivalent responses as correct.
 - If you do not check Accept equivalent responses as correct, the student response is marked correct if it is an exact text match to one of the accepted responses you entered.

If you do check Accept equivalent responses as correct, the student response is marked correct if it is equivalent to any accepted response you entered. For example, if you typed (-0.5, .75) as the correct answer, and the student submits (-.5, .75) or (-1/2, 3/4) and so forth, the student response is equivalent to the accepted response and is automatically graded as correct.

Adding a Drop Points Question

A drop points question inserts a graph and prompts the student to drop points on the graph in response to your question.

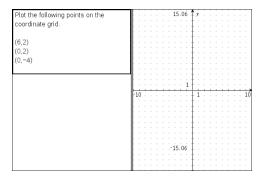

Click Insert > Question.

The Choose Question Type dialogue box opens.

- Select **Drop Points** under **Coordinate Points & Lists**.
- 3. Click Insert.

The drop points template opens with the cursor in the Question text area.

The graph is in the Student answer area.

When you are in the graph, the Graphs & Geometry tools are available to allow you to add functions.


Note: Only the teacher can edit the graph. Students can only view, zoom, or place points on the graph.

- 4. Type the question.
 - You can type any combination of text, maths expressions and chemical equations in the Question area.
 - You can add an image in the Question Area.
 - Press **Tab** or use the mouse pointer to navigate between fields.
- 5. Open the Configuration tool to set the number of points, hide or show coordinates and enter a correct answer.
 - The number of points can range from 1 to 5.

- Showing coordinates is turned off by default. Select the check box to display coordinate labels on the graph.
- Click to add additional fields for multiple correct answers. You can type any combination of text, maths expressions and chemical equations in the correct answer fields.
- Click [] to open the Templates and Symbols catalogue that allows you to enter 2D maths expressions.

Adding a Lists Question

A Lists question inserts a list and prompts students to enter data in the lists in response to your question.

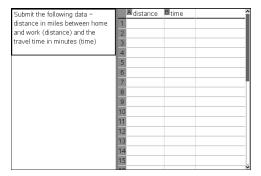

Click Insert > Question.

The Choose Question Type dialogue box opens.


- 2. Select List(s) under the Coordinate Points & Lists question from the Choose Question Type dialogue box.
- Click Insert.

The List template opens with the cursor in the Question text area.

- 4. Type the question.
 - You can add columns or rows, change the name of the lists and input data in the lists, using the same functions allowed in the Lists & Spreadsheet application.
- 5. Enter initial data in the lists, if desired.
- 6. Open the Configuration tool to set the number of lists for the student responses.
 - The number of lists can range from 1 to 5.
 - Lists must have names. The default names are List1, List2 and so forth.

Adding an Image: Label Question

An Image: Label question inserts an image. You can add blank fields to the image and have students fill in the blanks in response to your question.

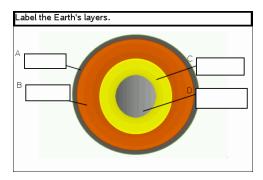

1. Click Insert > Question.

The Choose Question Type dialogue box opens.

- 2. Select Label under Image.
- Click Insert.

The Image: Label template opens with a blank background and one label. This is where the image for the question is inserted.

- 4. Type the question.
 - You can type any combination of text, maths expressions and chemical equations in the Question area.
 - Press **Tab** or use the mouse pointer to navigate between fields.
- 5. Insert an image in the bottom portion of the question template.
- 6. Open the Configuration tool to set the number of responses and to enter answers for each label.




The number of responses determines the number of labels on the image. Each new response gives the label a unique identifier, such as A, B, C and so forth. Drag the labels to the desired location on the image.

Note: If you set more than 26 responses, the labels are identified with numbers, starting with 1. You can insert a maximum of 35 labels.

- In the answers area, click it to open the Templates and Symbols catalogue that allows you to enter 2D maths expressions.
- If the label text is too large to fit in the default label size, grab and drag the borders of the label to resize it.
- 7. Type a suggested response in the labels, if desired. Select the Ignore case check box if capitalization is not important.
 - You can type any combination of text, maths expressions and chemical equations in the response area.
 - As you type the suggested response, a ghosted image of your answer appears in the respective label on the image. If the suggested response is too large for the default label size, grab and drag the borders of the label to resize it.

Adding an Image: Point on Question

An Image: Point on question inserts an image. Add check boxes to the image and have students place a check mark in the correct boxes in response to your question.

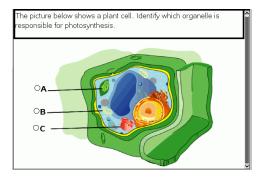

1. Click Insert > Question.

The Choose Question Type dialogue box opens.

- 2. Select Point on under Image.
- 3. Click Insert.

The Image: Point on template opens with a blank background and one point. This is where the image for the question is inserted.

- 4. Type the question.
 - You can type any combination of text, maths expressions and chemical equations in the Question area.
 - Press **Tab** or use the mouse pointer to navigate between fields.
- 5. Open the Configuration tool to set the response type, number of responses and correct answer.

- The Response Type makes the point a circle for Single Reponse and changes to a square for Multiple Responses to indicate students can select more than one hox.
- The number of responses determines the number of points on the image. Each new response gives the point a unique identifier, such as A, B, C and so forth. Drag the points to the desired location on the image.

Note: If you set more than 26 responses, the points are identified with numbers, starting with 1. You can insert a maximum of 35 points.

6. Click a point or points as a suggested response, if desired.

Adding a Chemistry Question

When you add a Chemistry question, students respond with a chemical formula or equation.

Balance the following equation:	
N ₂ + H ₂ → NH ₃	
Student: enter chemical notation here.	

Click Insert > Question.

The Choose Question Type dialogue box opens.

- 2. Click Chemistry.
- 3. Click Insert.

The Chemistry template opens with the cursor in the Question text area.

- 4. Type the question.
 - You can type any combination of text, maths expressions and chemical equations in the Question area.
 - You can add an image in the Question area.
- 5. Enter a suggested response, if desired.
- 6. Open the Configuration tool to enter a correct answer.

to add additional fields for multiple correct answers. You should enter all possible answers. The software does not evaluate equivalency for Chemistry answers.

Responding to Questions

The teacher may send you a question in a variety of format types. This section shows you how to answer the different question types.

Understanding the Question Toolbar

When you open a document with a question, a toolbar is available with four options. Access the toolbar using the following method.

In the Documents Toolbox, click 🥦 . Handheld, press menu.



Tool name		Tool function	
\Diamond	Clear Answers	Lets you clear the answers in the current question or in the document.	
~	Check Answer	If your document is in Self-Check mode, click here to view the correct answer. You cannot check answers to exam-type questions.	
	Insert	Lets you insert an expression box in your answer.	
A	Format	Click this tool to format the selected text in your answer as subscript or superscript.	

Types of Questions

There are several types of questions you may be asked. There may be variations in a type but how you answer the question is basically the same for each type.

Multiple choice

- Custom
- ABCD
- True/False
- Yes/No
- Always/Sometimes/Never
- Agree/Disagree
- Strongly Agree...Strongly Disagree

Open response

- Explanation
- Text match
- Equation

- y=
- f(x) =

Coordinate points and list

- (x,y) numerical input
- Drop point(s)
- List(s)

Responding to Quick Poll Questions

When teachers send quick polls during class, the question opens as a new document on top of any document you may currently have open. You can access other applications to perform calculations, and check or clear answers before submitting your answer to the question or quick poll.

Note: On TI-Nspire™ CX or TI-Nspire™ CX CAS handhelds, questions appear in colour if the teacher applied colour when writing the question. Although you can see colour in the questions you receive, you cannot add colour to the responses you submit.

Accessing Other Applications

If the teacher gives permission, the Quick Poll tool allows you to temporarily exit the question to perform calculations or access other documents to determine the answer to the question. For example, you can access the Scratchpad to perform a calculation, or you can access the Lists & Spreadsheet application and copy data from there to a List question type. In a List question, you can link to variables from the Vernier DataQuest™ or Lists & Spreadsheet applications.

To access other applications while in the Quick Poll screen:

1. Open a new document.

Handheld: Press 🖾 on to open the **Home** screen.

2. Choose an application.

Handheld: To return to the Quick Poll without accessing any documents, choose **C: Quick Poll**.

3. When you are finished, click the Quick Poll icon.

When you respond to a poll, your response is immediately sent to the teacher's computer and teachers can track student responses in real time.

Showing Your Work

The teacher may request you to show work for your response. If so, the response area has sections for you to write your starting point, your steps, and the final answer.

Responding to Different Question Types

- For Multiple Choice questions, press Tab to navigate to a response. Press Enter to mark a response.
- For Open Response questions, type a response.

- For Equation questions, type a response. If a graph is included in a question, the graph updates when you press Enter. Any functions entered show up on the graph, and the cursor remains in the answer box. You cannot manipulate the graph itself.
- For Expression questions, type a response. If the response type is Number, your response must be in the form of a number. If the response type is Expression, your response must be in the form of an expression. For example, x+1.
- For Coordinate Points: (x,y) questions, type an answer in the x-field box, and press **Tab** to move to the y-field box. Type an answer.

If a graph is included with the question, the graph is updated when you enter a function and press Enter.

You can access the Window and Zoom functions while you are working on the graph.

For Coordinate Points: Drop Points questions, press **Tab** to move the cursor to a point on the graph. Press Enter to drop a point at that location.

To delete a point, press Ctrl + Z to undo the action.

For Lists questions, press Tab if necessary to move the cursor to the first cell of the list. Type an answer, and press **Tab** to move to the next cell. Type an answer.

To link a column to an existing variable, select the column and then click var. Click Link To, and then click the variable you want to link to.

The behaviour in a Lists guestion closely matches the behaviour of the Lists & Spreadsheet application, with the following exceptions. In a Lists question, you cannot:

- Add, insert, or delete columns.
- Change the header row.
- Enter formulas.
- Switch to Table.
- Create plots.
- For Chemistry questions, type a response.
- For Image: Label questions, press **Tab** to move the cursor to a label on the image. Type a response in the label field.
- For Image: Point on questions, press **Tab** to move the cursor to a point on the image. Press Enter to mark a response.

Checking Answers

If the teacher enables self-check on the question, the Check Answer option is available.

1. Click 💥

Handheld: Press menul.

2. Click Check Answer.

Clearing Answers

After you answer a quick poll, you may decide you want to change the answer before vou submit it.

- Click Menu > Clear Answers > Current Question or Document.
 - Current Question clears answers for the active question.
 - **Document** clears answers for all questions contained in the active document.

-or-

If you answered the question, you still have time to clear the answer before you submit it to your teacher.

Click Clear Answer to clear your answer and try again.

Handheld: Press docv and choose Clear Answer.

Submitting Responses

To send a final answer to the teacher:

Click Submit Response.

Handheld: Press doc ▼ and choose Submit.

The response is sent to the teacher and the last screen you used is displayed.

Your response appears on the teacher's computer. Your teacher may have set the poll to allow you to submit more than one answer. If so, you can continue to respond to the poll and submit answers until the teacher stops the poll.

Calculator Application

The Calculator application lets you:

- Enter and evaluate maths expressions
- Define variables, functions, and programmes that become available to any TI-Nspire[™] application—such as the Graphs application—residing in the same problem.
- Define library objects, such as variables, functions, and programmes, which are accessible from any problem of any document. For information on creating library objects, see Libraries.

Adding a Calculator Page

To start a new document with a blank Calculator page:


From the main File menu, click New Document, and then click Add Calculator.

Handheld: Press fig., and select Calculator ==.

To add a Calculator page in the current problem of an existing document:

From the toolbar, click Insert > Calculator.

Handheld: Press docv and select Insert > Calculator.

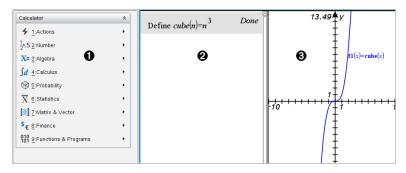

- **a** Calculator menu. This menu is available anytime you are in the Calculator work area using the Normal view mode. The menu in this screen snapshot may not exactly match the menu on your screen.
- Calculator work area
 - Enter a maths expression on the entry line, and then press Enter to evaluate the expression.
 - Expressions are displayed in standard mathematical notation as you enter
 - Entered expressions and results show in the Calculator history.
- **a** Example of Calculator variables used in another application.

Entering and Evaluating Maths Expressions

Entering Simple Maths Expressions

Note: To enter a negative number on the handheld, press (-). To enter a negative number on a computer keyboard, press the hyphen key (-).

$$2^{8} \cdot 43$$

Suppose you want to evaluate 1

- 1. Select the entry line in the Calculator work area.
- 2. Type 2^8 to begin the expression.

- 3. Press ▶ to return the cursor to the baseline.
- 4. Complete the expression:

Type *43/12.

Handheld: Type **▼** 43 ÷ 12.

5. Press Enter to evaluate the expression.

The expression is displayed in standard mathematical notation, and the result is displayed on the right side of the Calculator.

$$\frac{2^8 \cdot 43}{12}$$
 $\frac{2752}{3}$

Note: If a result does not fit on the same line with the expression, it is displayed on the next line.

Controlling the Form of a Result

You might expect to see a decimal result instead of 2752/3 in the preceding example. A close decimal equivalent is 917.33333..., but that's only an approximation.

By default, Calculator retains the more precise form: 2752/3. Any result that is not a whole number is shown in a fractional or exact (Exact Arithmetic and CAS) form, or symbolic form (CAS). This reduces rounding errors that could be introduced by intermediate results in chained calculations.

You can force a decimal approximation in a result:

By pressing shortcut keys.

Windows®: Press Ctrl+Enter to evaluate the expression.

Mac[®]: Press \mathcal{H} +Enter to evaluate the expression.

Handheld: Press ctrl enter instead of enter to evaluate the expression.



Pressing ctrl enter forces the approximate result.

By including a decimal in the expression (for example, 43. instead of 43).

$$\frac{2^{8} \cdot 43.}{12}$$
 917.333

By wrapping the expression in the approx() function.

$$\operatorname{approx}\left(\frac{2^{8} \cdot 43}{12}\right) \qquad \qquad 917.333$$

By changing the document's Auto or Approximate mode setting to Approximate.

From the File menu, click Settings > Document Settings.

Handheld: Press doc ▼ to display the File menu.

Note that this method forces all results in all of the document's problems to approximate.

Inserting Items from the Catalogue

You can use the Catalogue to insert system functions and commands, symbols, and expression templates into the Calculator entry line.

1. Click the **Utilities** tab, and then click is to open the Catalogue.

Handheld: Press 🕮 1.



Note: Some functions have a wizard that prompts you for each argument. Those functions are shown with an indicator. To receive the prompts, select Wizards On.

- 2. If the item you are inserting is visible in the list, select it and press Enter to insert
- 3. If the item is not visible:
 - a) Click inside the list of functions, and then press a letter key to jump to the entries that begin with that letter.
 - b) Press ▲ or ▼ as necessary to highlight the item you are inserting. Help, such as syntax information or a short description of the selected item, appears at the bottom of the Catalogue.
 - c) Press Enter to insert the item into the entry line.

Using an Expression Template

The Calculator has templates for entering matrices, piecewise functions, systems of equations, integrals, derivatives, products, and other maths expressions.



For example, suppose you want to evaluate n=3

1. On the **Utilities** tab, click to open the templates.

Handheld: Press 🖦.

Double-click $\hat{\Sigma}_{\alpha}^{\square}$ to insert the algebraic sum template.

The template appears on the entry line with small blocks representing elements that you can enter. A cursor appears next to one of the elements to show that you can type a value for that element.



3. Use the arrow keys to move the cursor to each element's position, and type a value or expression for each element.

$$\sum_{n=3}^{7} (n)$$

Press **Enter** to evaluate the expression.

$$\frac{7}{\sum_{n=3}^{7} (n)}$$

Creating Matrices

1. On the **Utilities** tab, click [to open the templates.

Handheld: Press 데:.

2. Double-click IIII.

The Create a Matrix dialogue box opens.



3. Type the Number of rows.

4. Type the Number of columns, and then click OK.

Calculator opens a template with spaces for the rows and columns.

Note: If you create a matrix with a large number of rows and columns, it may take a few moments to appear.

Type the matrix values into the template, and then press Enter to define the matrix.

Inserting a Row or Column into a Matrix

- ► To insert a new row, hold down Alt and press Enter.
- To insert a new column, hold down Shift and press Enter.

Handheld:

- ► To insert a new row, press 🗗.
- ► To insert a new column, press **Shift+Enter**.

Inserting Expressions Using a Wizard

You can use a wizard to simplify entering some expressions. The wizard contains labelled boxes to help you enter the arguments in the expression.

For example, suppose you want to fit a y=mx+b linear regression model to the following two lists:

1. On the **Utilities** tab, click 10 open the Catalogue.


Handheld: Press 🕮 1.

- 2. Click an entry in the Catalogue, and then press L to jump to the entries that begin with "L."
- 3. Press ▼ as necessary to highlight LinRegMx.
- 4. Select the Wizards On option, if it is not already selected:

Handheld: Press **Tab Tab** to highlight **Wizards On**, press **Enter** to change the setting, and then press **Tab Tab** to highlight **LinRegMx** again.

5. Press Enter.

A wizard opens, giving you a labelled box to type each argument.

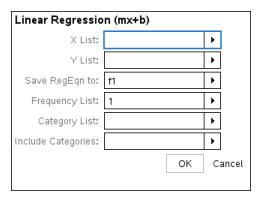

- 6. Type {1,2,3,4,5} as X List.
- 7. Press Tab to move to the Y List box.
- 8. Type {5,8,11,14,17} as Y List.
- 9. If you want to store the regression equation in a specific variable, press Tab, and then replace Save RegEqn To with the name of the variable.
- 10. Click **OK** to close the wizard and insert the expression into the entry line.

Calculator inserts the expression and adds statements to copy the regression equation and show the variable *stat.results*, which will contain the results.

LinRegMx {1,2,3,4,5},{5,8,11,14,17},1: CopyVar stat.RegEqn,f2: stat.results

Calculator then shows the stat results variables.

Note: You can copy values from the *stat.results* variables and paste them into the entry line.

Creating a Piecewise Function

1. Begin the function definition. For example, type the following expression:


Define
$$f(x,y) =$$

2. On the **Utilities** tab, click to open the templates.

Handheld: Press 🖦.

3. Double-click 🐘

The Create Piecewise Function dialogue box opens.



4. Type the Number of Function Pieces, and click OK.

Calculator opens a template with spaces for the pieces.

- 5. Type the expressions into the template, and press **Enter** to define the function.
- 6. Enter an expression to evaluate or graph the function. For example, type the expression **f** (1,2) on the Calculator entry line.


Creating a System of Equations

1. On the **Utilities** tab, click open the templates.

Handheld: Press 때등.

2. Double-click \{\frac{1}{2}\}.

The Create a System of Equations dialogue box opens.



3. Type the Number of Equations, and click OK.

Calculator opens a template with spaces for the equations.

Type the equations into the template, and press Enter to define the system of equations.

Entering Multiple Statements on the Entry Line

To enter several statements on a single line, separate them with a colon (":"). Only the result of the last expression is shown.

$$a:=5: b:=2: \frac{a}{b} \cdot 1.$$
 2.5

CAS: Working with Measurement Units

A list of pre-defined constants and measurement units is available in the Catalogue. You can also create your own units.

Note: If you know a unit's name, you can type the unit directly. For example, you can type qt to specify quarts. To type the underscore symbol on the handheld, press ctrl .

CAS: Converting Between Measurement Units

You can convert a value between any two units within the same category (such as length).

Example: Using the Catalogue, convert 12 metres to feet. The desired expression is 12• m▶ ft.

- 1. Type 12 on the entry line.
- 2. On the **Utilities** tab, click to show the unit conversions.

Handheld: Press 🕮 3.




3. Click the Length category to expand the list of pre-defined length units.

Handheld: Scroll to the Length category, and press Enter.

4. Scroll to metre.

Handheld: Scroll to _m (noting the metre hint in the Help window).



5. Press Enter to paste _m to the entry line.

12_m

6. Click the Conversion Operator (►) at the top of the Units list, and press **Enter** to paste it to the entry line.

12_m

7. Select _ft from the Length category, and press Enter.

12_*m*▶_*ft*

8. Press **Enter** to evaluate the expression.

12·_m▶_ft 39.3701·_ft

CAS: Creating a User-defined Unit

As with the pre-defined units, user-defined unit names must begin with an underscore symbol.

Example: Using the pre-defined units _ft and _min, define a unit named _fpm that lets you enter velocity values in feet per minute and convert velocity results to feet per minute.

Define $\underline{fpm} = \underline{\underline{ft}}$ $\underline{\underline{min}}$

Now you can use the new velocity unit *fpm*.

15·_knot▶_fpm	1519.03 ·_ fpm
160·_ <i>mph</i> ▶ _ <i>fpm</i>	14080.:_fpm
500•_fpm▶_knot	4.93737·_knot

Using the Unit Conversion Assistant

In any application where maths input is allowed, you can generate unit conversions using the Unit Conversion Assistant. This can help reduce syntax errors by automatically entering the units for you.

Example: Convert 528 minutes to hours. The desired expression is 528 min ► hr.

- Type **528** on the entry line.
- 2. On the Utilities tab, click the Unit Conversions bar.


Handheld: Press 🕮 🛐.



3. Click the Open button next to Conversion Assistant.


Handheld: Press [enter].

The Unit Conversion Assistant dialogue box displays:




Click the **Category** list and select **Time**.

Handheld: Scroll to the **Time** category and press enter.



5. Click the From list and select min (minute).


Handheld: Scroll to min (minute) and press [enter].



Note: You can select Use existing unit at the bottom of the list if you have already entered a unit. In this example, you might have already entered 528•_min.

6. Click the **To** list and select **hr** (hour).

Handheld: Scroll to hr (hour) and press enter.



- 7. Click **OK** to paste **min** hr to the entry line.
- Press Enter to evaluate the expression.

Handheld: Press enter.



Note:

- The last Category, From, and To selections will be retained until:
 - the software is closed and re-opened (Desktop)
 - the device is reset (Handheld)
 - the language is changed, or the app is uninstalled or upgraded (iPad)
- Inserting a conversion into a Notes text field will automatically create a Maths Box.
- Inserting a conversion into an empty line in the Calculator will automatically insert Ans before the conversion.

Working with Variables

When you first store a value in a variable, you give the variable a name.

- If the variable does not already exist, Calculator creates it.
- If the variable already exists, Calculator updates it.

Variables within a problem are shared by TI-Nspire[™] maths and science learning technology applications. For example, you can create a variable in Calculator and then use or modify it in Graphs & Geometry or Lists & Spreadsheet within the same problem.

For more information, see *Using Variables*.

Creating User-defined Functions and Programmes

You can use the **Define** command to create your own functions and programmes. You can create them in the Calculator application or in the Programme Editor and then use them in other TI-Nspire[™] applications.

For more information, see Overview of the Programme Editor and Libraries.

Defining a Single-line Function

Suppose you want to define a function named cube() that calculates the cube of a number or variable.

1. On the Calculator entry line, type **Define cube** $(x) = x^3$ and press **Enter**.

Define
$$cube(x)=x^3$$
 Done

The message "Done" confirms that the function has been defined.

2. Type cube (2) and press Enter to test the function.

Defining a Multiple-line Function Using Templates

You can define a function consisting of multiple statements entered on separate lines. A multiple-line function may be easier to read than one with multiple statements separated by colons.

Note: You can create multiple-line functions only by using the Define command. You cannot use the := or \rightarrow operators to create multiple-line definitions. The **Func...EndFunc** template serves as a container for the statements.

As an example, define a function named g(x,y) that compares two arguments x and y. If argument x >argument y, the function should return the value of x. Otherwise, it should return the value of y.

1. On the Calculator entry line, type **Define** g(x,y) = 0. Do not press **Enter** yet.

define
$$g(x,y)=$$

2. Insert the Func...EndFunc template.

From the Functions & Programmes menu, select Func...EndFunc.

Calculator inserts the template.



Insert the If...Then...Else...EndIf template.

From the Functions & Programmes menu, select Control, and then select If...Then...Else...EndIf.

Calculator inserts the template.

define
$$g(x,y)$$
=Func

If Then

Else

EndIf

EndFunc

4. Type the remaining parts of the function, using the arrow keys to move the cursor from line to line.

define
$$g(x,y)$$
=Func

If $x>y$ Then

return x

Else

return y

EndIf

EndFunc

- Press Enter to complete the definition.
- 6. Evaluate g (3, -7) to test the function.

$$g(3,-7)$$
 3

Defining a Multiple-line Function Manually

Within a multi-line template such as Func...EndFunc or If...EndIf, you can start a new line without completing the definition.

- Handheld: Press ← instead of enter.
- Windows®: Hold Alt and press Enter.

Macintosh®: Hold Option and press Enter.

As an example, define a function sumIntegers(x) that calculates the cumulative sum of integers from 1 to x.

1. On the Calculator entry line, type **Define sumIntegers**(x) =. Do not press Enter vet.

Define sumIntegers(x) =

2. Insert the Func...EndFunc template.

From the Functions & Programmes menu, select Func...EndFunc.

Calculator inserts the template.

Define sumIntegers(x)=Func EndFunc

3. Type the following lines, pressing 🗗 or Alt+Enter at the end of each line.

Define sumIntegers(x)=Func Local *i*,tmpsum tmpsum:=0For i,1,xtmpsum:=tmpsum+i EndFor Return *tmpsum* EndFunc

- After typing Return tmpsum, press Enter to complete the definition.
- 5. Evaluate sumIntegers (5) to test the function.

sumintegers(5) 15

Defining a Programme

Defining a programme is similar to defining a multiple-line function. The **Prgm...EndPrgm** template serves as a container for the programme statements. As an example, create a programme named g(x,y) that compares two arguments. Based on the comparison, the programme should show the text "x>y" or " $x\leq y$ " (showing the values of x and y in the text).

1. On the Calculator entry line, type Define prog1(x,y) = 0.00 Do not press Enter yet.

Define
$$prog1(x,y)=$$

Insert the Prgm...EndPrgm template.

From the Functions & Programmes menu, select Prgm...EndPrgm.

Define
$$prog1(x,y)$$
=Prgm

EndPrgm

Insert the If...Then...Else...EndIf template.

From the Functions & Programmes menu, select Control, and then select If...Then...Else...EndIf.

Define
$$prog1(x,y)$$
=Prgm

If Then

Else

EndIf

EndPrgm

4. Type the remaining parts of the function, using the arrow keys to move the cursor from line to line. Use the Symbol Palette to select the "\le " symbol.

Define
$$prog I(x,y)$$
=Prgm

If $x>y$ Then

Disp $x, "> ", y$

Else

Disp $x, " \le ", y$

EndIf

EndPrgm

- 5. Press Enter to complete the definition.
- 6. Execute prog1 (3, -7) to test the programme.

prog1(3,-7)	
	3 > -7
	Done

Recalling a Function or Programme Definition

You might want to reuse or modify a function or programme that you have defined.

Show the list of defined functions.

From the Actions menu, select Recall Definition.

2. Select the name from the list.

The definition (for example, Define f(x)=1/x+3) is pasted into the entry line for editing.

Editing Calculator Expressions

Although you cannot edit an expression in the Calculator history, you can copy all or part of an expression from the history and paste it to the entry line. You can then edit the entry line.

Positioning the Cursor in an Expression

Press tab, , , , , . → to move the cursor through the expression. The cursor moves to the closest valid position in the direction that you press.

Note: An expression template may force the cursor to move through its parameters, even though some parameters may not be exactly in the path of the cursor movement. For example, moving upward from the main argument of an integral always moves the cursor to the top limit.

Inserting into an Expression in the Entry Line

- 1. Position the cursor at the point where you want to insert additional elements.
- 2. Type the elements that you want to insert.

Note: When you insert an open parenthesis, Calculator adds a temporary close parenthesis, displayed in gray. You can override the temporary parenthesis by typing the same parenthesis manually or by entering something past the temporary parenthesis (thereby implicitly validating its position in the expression). After you override the temporary gray parenthesis, it is replaced with a black parenthesis.

Selecting Part of an Expression

1. Position the cursor at the starting point in the expression.

Handheld: Press \P , ightharpoonup, ightharpoonup or ightharpoonup to move the cursor.

2. Press and hold ⊕shift, and then press ♠, ▶, ▲ or ▼ to select.

Deleting all or part of an expression on the entry line

- Select the part of the expression to delete.
- 2. Press del .

Financial Calculations

Several TI-Nspire™ functions provide financial calculations, such as time value of money, amortisation calculations, and return on investment calculations.


The Calculator application also includes a Finance Solver. It lets you dynamically solve several types of problems, such as loans and investments.

Using the Finance Solver

Open the Finance Solver.


From the Finance menu, click Finance Solver.

The Finance Solver displays its default values (or previous values, if you have already used the solver in the current problem).

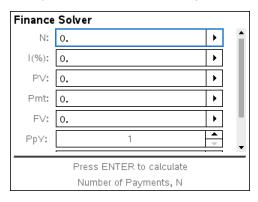

- 2. Enter each known value, using tab to cycle through the items.
 - The help information at the bottom of the Finance Solver describes each item.
 - You might need to temporarily skip the value that you want to calculate.
 - Make sure to set PpY, CpY and PmtAt to the correct settings (12, 12 and END in this example).
- 3. Press tab as necessary to select the item that you want to calculate, and then press enter.

The Finance Solver calculates the value and stores all the values in "tym." variables, such as tvm.n and tvm.pmt. These variables are accessible to all TI-Nspire[™] applications within the same problem.

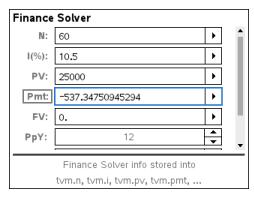

Finance Functions Included

In addition to the Finance Solver, TI-Nspire™ built-in finance functions include:

- TVM functions for calculating future value, present value, number of payments, interest rate and payment amount.
- Amortisation information such as amortisation tables, balance, sum of interest payments and sum of principal payments.
- Net present value, internal rate of return and modified rate of return.
- Conversions between nominal and effective interest rates, and calculation of days between dates.

Notes:

- Finance functions do not automatically store their argument values or results to the TVM variables.
- For a complete list of TI-Nspire™ functions, see the *Reference Guide*.

Working with the Calculator History

As you enter and evaluate expressions in the Calculator application, each entry/result pair is saved in the Calculator history. The history gives you a way to review your calculations, repeat a set of calculations, and copy expressions for reuse in other pages or documents.

Viewing the Calculator History

Note: You may notice a processing slowdown when the history contains a large number of entries.

Press ▲ or ▼ to scroll through the history.

3.76 -7.9+√5	-0.66385
$-0.66384977522033+2 \cdot \log_{10}(45)$	2.64258
$a:=5:b:=2:\frac{a}{b}\cdot 1$	2.5
Define $cub(x)=x^3$	Done

Copying a Calculator History Item to the Entry Line

You can quickly copy an expression, subexpression, or result from the history into the entry line.

1. Press ▲ or ▼ to move through the history and select the item that you want to copy.

Select part of the expression or result by using Shift in combination with the arrow keys.

$$\frac{3.76}{-7.9+\sqrt{5}}$$

Note: The float setting for the current document may limit the number of decimal places displayed in a result. To capture the result in its full precision, select it either by scrolling with the up and down arrow keys or by triple-clicking it.

2. Press Enter to copy the selection and insert it into the entry line.

Copying a History Item to Another Application

- Press ▲ or ▼ to move through the history and select the item that you want to copy.
- Optionally, select part of the expression or result by pressing Shift in combination with the arrow keys.
- 3. Use the standard key shortcut for copying a selection.

Windows®: Press Ctrl+C.

Mac®: Press **ℋ+C**.

Handheld: Press ctrl C.

- 4. Place the cursor at the location where you want the copy.
- 5. Paste the copy.

Windows®: Press Ctrl+V.

Mac®: Press **X+V**.

Handheld: Press ctrl **V**.

Note: If you copy an expression that uses variables into a different problem, the values of those variables are not copied. You must define the variables in the problem where you paste the expression.

Deleting an Expression from the History

When you delete an expression, all variables and functions defined in the expression retain their current values.

1. Drag or use the arrow keys to select the expression.

Handheld: Use the arrow keys.

$$\frac{3.76}{-7.9+\sqrt{5}}$$

Press Del.

The expression and its result are removed.

Clearing the Calculator History

When you clear the history, all variables and functions defined in the history retain their current values. If you clear the history by mistake, use the undo feature.

From the Actions menu, select Clear History.

All expressions and results are removed from the history.

Using Variables

A variable is a defined value that can be used multiple times in a problem. You can define a value or function as a variable within each application. Within a problem. variables are shared by TI-Nspire™ applications. For example, you can create a variable in Calculator, and then use or modify it in Graphs & Geometry or Lists & Spreadsheet within the same problem.

Each variable has a name and a definition and the definition can be changed. When you change the definition, all occurrences of the variable in the problem are updated to use the new definition. In the TI-Nspire™ software, a variable has four attributes:

- Name User-defined name assigned when the variable is created.
- Location Variables are stored in memory.
- Value Number, text, mathematical expression or function.
- Type Type of data that can be stored as a variable.

Note: Variables created with the Local command within a user-defined function or programme are not accessible outside that function or programme.

Linking Values on Pages

Values and functions created or defined in one application can interact with other applications (within the same problem) to share data.

When using linked items, keep in mind:

- Values can be linked between applications on one page or between different pages of the same problem.
- All applications are linked to the same data.
- If the linked value is changed in the original application, the change is reflected in all linked usages.

Defining a variable is the first step in linking values.

Creating Variables

Any portion or attribute of an object or function created within an application can be stored as a variable. Examples of attributes that can become variables are the area of a rectangle, the radius of a circle, the value contained in a spreadsheet cell or the contents of a row or column or a function expression. When you create a variable, it is stored in memory.

Types of Variables

You can store the following data types as variables:

Data type	Examples
Expression	² √2
012	2.54 1.25E6 2π xmin/10 2+3i (x-2) $\frac{\sqrt{-2}}{2}$
List	{2, 4, 6, 8} {1, 1, 2} {"red", "blue", "green"}
{····}	
Matrix	1 2 3 3 6 9 This can be entered as: [1,2,3;3,6,9]
Character string	"Hello" "xmin/10" "The answer is:"
Function, programme $f(x)$	myfunc(arg) ellipse(x, y, r1, r2)
Measurement 01_2	area, perimeter, length, slope, angle

When you click or press var on a handheld to open the list of stored variables, a symbol indicates the type.

Creating a Variable from a Calculator Value

This example shows how to create a variable using a handheld. Complete the following steps to create a variable named *num* and store the result of the expression 5+83 in that variable

1. On the Calculator entry line, type the expression 5+8^3.

2. Press > to expand the cursor to the baseline.

3. Press ctrl var and then type the variable name num.

This means: Calculate $5+8^3$ and store the result as a variable named num.

4. Press enter.

Calculator creates the variable *num* and stores the result there.

$5+8^3 \rightarrow num$		517
-------------------------	--	-----

Creating a Variable in the Computer Software

When creating a variable in the computer software, use the following conventions. As alternatives to using \rightarrow (store), you can use ":=" or the **Define** command. All of the following statements are equivalent.

$$5+83 \rightarrow num$$

num := 5+83

Define num=5+83

Checking a Variable's Value

You can check the value of an existing variable by entering its name on the Calculator entry line. When you type the name of a stored variable, it appears in bold type.

On the Calculator entry line, type the variable name num and press enter.

The value most recently stored in *num* is displayed as the result.

Automatically Creating Variables in Graphs & Geometry


In the Graphs and Geometry applications, functions defined on the entry line are automatically stored as variables.



In this example, $f1(x)=x^3$ is a variable definition, which allows it to be displayed in other applications including a table in the Lists & Spreadsheet application.

Creating a Variable from a Graphs & Geometry Value


1. Click the value to store as a variable.




Click m.

Handheld: Press var .

The Variables options are displayed with Store Var highlighted.




Press enter. VAR := appears before the selected value. This is the default name.



- 4. Replace the default name VAR with the variable name you want to give the value.
- 5. When the variable name is typed, press enter.

The value is saved to that variable name and the stored value or its name appears in bold text to indicate it is a stored value.



Note: You can also share a Graphs & Geometry axis end value with other applications. If necessary, click **Actions**, **Show/Hide Axes End Values** to display the end values on the horizontal and vertical axes. Click the number for an end value to highlight it in the entry field. Name the variable and store it for use with other applications by using any method described in Step 2.


Automatically Creating Variables in Lists & Spreadsheet

Naming a list at the top of a Lists & Spreadsheet column automatically stores that value as a list variable. This variable can be used in other applications including Data & Statistics.

Creating a Variable from a Lists & Spreadsheet Cell Value


You can share a cell value with other applications. When defining or referring to a shared cell in Lists & Spreadsheet, precede the name with an apostrophe (').

- 1. Click the cell that you want to share.
- Click to open the Variables menu. Handheld: Press var.



3. Click Store Var.

A formula is inserted into the cell with *var* as a placeholder for a variable name.



4. Replace the letters "var" with a name for the variable and press enter.

The value is now available as a variable to other applications within the same problem.

Note: If a variable with the name you specified already exists in the current problem space, Lists & Spreadsheet displays an error message.

Using (Linking) Variables

Sharing, or linking, the variables you create is a powerful tool for maths exploration. The display of linked variables is automatically updated when the variable's value changes.

Linking to Shared Variables

To use a stored variable:

- 1. Display the page and select the location or object to which you want to link a variable.
- 2. Select the Variables tool var.

The Variables options are displayed. The software knows which types of variables will work in the location or with the object selected and will only display those variables.

3. Use ▲ and ▼ to scroll the list.

-or-

Type part of the variable name.

As you type, the system displays a list of variables that begin with the letters you typed. Typing part of the name enables you to locate a variable more quickly if the list is long.

4. When you locate and highlight the name of the variable you want to use, click the name.

-or-

Press enter.

The selected variable value is linked.

Linking a Lists & Spreadsheet Cell to a Variable

When you link a cell to a variable, Lists & Spreadsheet keeps the cell value updated to reflect the current value of the variable. The variable can be any variable in the current problem and can be defined in Graphs & Geometry, Calculator or any instance of Lists & Spreadsheet.

Note: Do not link to a system variable. Doing so could prevent the variable from being updated by the system. System variables include ans, StatMatrix and statistics results (such as *RegEqn*, *dfError* and *Resid*).

1. Click the cell that you want to link to the variable.

2. Open the VarLink menu:

- Click 🧓 , and then click **Cell**.
- Handheld: Press var].

The VarLink menu is displayed.



3. Under Link To, scroll to the name of the variable and click it.

The cell shows the value of the variable.

Using a Variable in a Calculation

After storing a value in a variable, you can use the variable name in an expression as a substitute for the stored value.

1. Enter the expression:

- Type 4*25*num^2 on the entry line and press Enter.
- Handheld: Type 4 × 25 × num^2 on the entry line and press [enter].

Calculator substitutes 517, the value currently assigned to num and evaluates the expression.

$$4 \cdot 25 \cdot num^2$$
 26728900

2. Enter the expression:

- Type 4*25*nonum^2 and press Enter.
- Handheld: Type 4 × 25 × nonum^2 on the entry line and press [enter].

$$4 \cdot 25 \cdot nonum^2$$
 $100 \cdot nonum^2$

CAS: Because the variable *nonum* has not been defined, it is treated algebraically in the result.

Because the variable *nonum* has not been defined, the expression returns an error message.

Naming Variables

Variable and function names that you create must meet the following naming rules.

Note: In the unlikely event that you create a variable with the same name as one used for statistical analysis or by the Finance Solver, an error condition could occur. If you begin entering a variable name that is already in use in the current problem, the software shows the entry in **bold** to let you know.

- Variable names must be in one of the forms xxx or xxx, yyy. The xxx part can have 1 to 16 characters. The yyy part, if used, can have 1 to 15 characters. If you use the xxx.yyy form, both xxx and yyy are required; you cannot start or end a variable name with a period ".".
- Characters can consist of letters, digits and the underscore character (). Letters can be U.S. or Greek letters (but not Π or π), accented letters and international letters.
- Do not use c or n from the symbol palette to construct a variable name such as c1 or n12. These may appear to be letters, but they are treated internally as special symbols.
- You can use uppercase or lowercase letters. The names AB22, Ab22, aB22 and ab22 all refer to the same variable.
- You cannot use a digit as the first character of xxx or yyy.
- You can use digits 0 through 9, U.S. letters, a z, Latin and Greek letters (but not π) as subscripts (for example, a_2 , q_3 , or h_2o). To enter a subscript while typing a variable name, select in the Math Templates or on the formatting toolbar.
- Do not use spaces.
- If you want a variable to be treated as a complex number, use an underscore as the last character of the name.
- CAS: If you want a variable to be treated as a type of unit (such as m or ft), use an underscore as the first character of the name. You cannot use subsequent underscores in the name.
- You cannot use an underscore as the first character of the name.
- You cannot use a preassigned variable, function or command name, such as Ans, min or tan.

Note: For more information about TI-Nspire[™] functions, see the *Reference Guide*.

Library documents and library objects are subject to additional naming restrictions. For more information, see Libraries.


Here are some examples:

Variable names	Valid?
Myvar, my.var	Yes

Variable names	Valid?
My var, list 1	No. Contains a space.
a, b, b12, b ₁₂ , c, d	Yes. Note that variables $\it b12$ and $\it b_{12}$ are distinct.
Log, Ans	No. Preassigned to a system function or variable.
Log1, list1.a, list1.b	Yes
3rdTotal, list1.1	No. xxx or yyy starts with a digit.

Adjusting Variable Values with a Slider

A slider control lets you interactively adjust or animate the value of a numeric variable. You can insert sliders in the Graphs, Geometry, Notes and Data & Statistics applications.

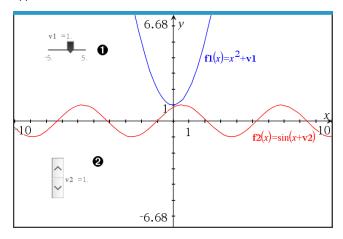

- lacktriangledown Horizontal slider for adjusting variable vI.
- **2** Minimised vertical slider for adjusting variable v2.

Note: TI-Nspire[™] version 4.2 or higher is required for opening .tns files containing sliders on Notes pages.

Inserting a Slider Manually

From a Graphs, Geometry or Data & Statistics page, select Actions > Insert Slider.
 —or—


From a Notes page, make sure the cursor is not in a maths box or chem box, and then select **Insert > Insert Slider**.

The Slider Settings screen opens.



2. Enter the desired values, and click OK.

The slider is displayed. On a Graphs, Geometry or Data & Statistics page, handles are displayed to let you move or stretch the slider.




To remove the handles and use the slider, click an empty space in the work area. You can show the handles any time by selecting Move from the slider's context menu.

- 3. To adjust the variable, slide the pointer (or click the arrows on a minimised slider).
 - You can use the **Tab** key to move the focus to a slider or to move from one slider to the next. The colour of the slider changes to show you when it has the focus.
 - When a slider has the focus, you can use the arrow keys to change the value of the variable.

Working with the Slider

Use the options on the context menu to move or delete the slider, and to start or stop its animation. You can also change the slider's settings.


Display the slider's context menu.



2. Click an option to select it.


Automatic Sliders in Graphs


Sliders can be created for you automatically in the Graphs application and in the analytic window of the Geometry application. You are offered automatic sliders when you define certain functions, equations or sequences that refer to undefined variables.

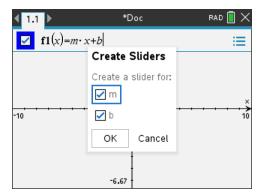

Locking and Unlocking Variables

Locking lets you protect variables from modification or deletion. Locking prevents unintended changes to a variable.





Time and altitude lists can be locked to ensure problem fidelity

Reference function **f1** can be locked to prevent unintended change

Variables you Cannot Lock

- System variable Ans
- stat. and tvm. variable groups

Important Information About Locked Variables

- To lock variables, use the Lock command.
- To modify or delete a locked variable, you must first unlock the item.
- Locked variables display a lock icon on the variable menu list.

The Lock command clears the Redo/Undo history when applied to unlocked variables.

Examples of Locking

Lock a,b,c	Locks variables a,b and c from the Calculator application.
Lock mystats.	Locks all members of variable group mystats.
UnLock func2	Unlocks variable func2.
<pre>lm:=getLockInfo (var2)</pre>	Retrieves the current lock status of $var2$ and assigns that value to lm in the Calculator application.

For more information, see the Reference Guide.

Updating a Variable

If you want to update a variable with the result of a calculation, you must store the result explicitly.

Entry	Result	Comment
a := 2	2	
a ³	8	Result not stored in variable a .
a	2	
a := a ³	8	Variable a updated with result.
a	8	
a ² → a	64	Variable a updated with result.
a	64	

Reusing the Last Answer

Each instance of Calculator automatically stores the last calculated result as a variable named Ans. You can use Ans to create a chain of calculations.

Note: Do not link to Ans or any system variable. Doing so could prevent the variable from being updated by the system. System variables include statistics results (such as Stat.RegEqn, Stat.dfError and Stat.Resid) and Finance Solver variables (such as tvm.n, tvm.pmt and tvm.fv).

As an example of using Ans, calculate the area of a garden plot that is 1.7 meters by 4.2 meters. Then use the area to calculate the yield per square meter if the plot produces a total of 147 tomatoes.

1. Calculate the area:

- On the Calculator entry line, type 1.7*4.2 and press Enter.
- Handheld: On the Calculator entry line, type 1.7 × 4.2 and press enter.

1.7·4.2	7.14
---------	------

- 2. Reuse the last answer to calculate the yield per square meter:
 - Type 147/ans and press Enter to find the yield.
 - Handheld: Type 147 \div ans and press enter to find the yield.

147	20.5882
${7.14}$	

- 3. As a second example, calculate $-7.9+\sqrt{5}$ and then add $2*\log(45)$.
 - Type 3.76/(-7.9+sqrt(5)) and press Enter.
 - Handheld: Type 3.76 [÷] ((-)7.9+sqrt(5)) and press [enter].

$$\frac{3.76}{-7.9+\sqrt{5}}$$

- 4. Reuse the last answer:
 - Type ans+2*log (45) and press Enter.
 - Handheld: Type ans+2 × log (45) and press enter.

$$-0.66384977522033+2 \cdot \log_{10} (45)$$
 2.64258

Temporarily Substituting a Value for a Variable

Use the "|" (such that) operator to assign a value to a variable for just a single execution of the expression.

a:=200.12	200.12
$a^2 a=100$	10000
a	200.12

Removing a Linked Variable

- 1. Select the linked variable.
- 2. Press var .

The Variables options are displayed.

3. Select Unlink.

The link is removed from formatting.	the value and the	value is displayed wit	hout any bold

Graphs Application

The Graphs application lets you:

- Graph and explore functions and other relations, such as inequalities, parametrics, polars, sequences, differential equation solutions, and conics.
- Animate points on objects or graphs and explore their behaviour.
- Link to data created by other applications.

Adding a Graphs Page

► To start a new document with a blank Graphs page:


From the main File menu, click New Document, and then click Add Graphs.

Handheld: Press 🚮 on, and select Graphs 😃.

► To add a Graphs page in the current problem of an existing document:

From the toolbar, click Insert > Graphs.

Handheld: Press docv and select Insert > Graphs.

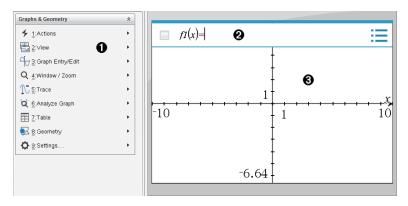

- **Graphs & Geometry menu.** Contains tools for defining, viewing, and investigating relations.
- **2** Entry line. Lets you define the relations that you want to graph. The default graph type is Function, so the form fI(x)= is displayed initially. You can define multiple relations for each of several graph types.
- Graphs Work Area
 - Shows graphs of relations that you define on the entry line.
 - Shows points, lines, and shapes that you create with geometry tools.
 - Drag the area to pan (affects only those objects created in the Graphs application).

What You Must Know

Changing the Graphs and Geometry Settings

- 1. From the Settings menu in the Documents Toolbox, select Settings.
- 2. Select the settings that you want to use.
 - Display Digits. Sets the display format for numbers as Floating or Fixed decimal.
 - Graphing Angle. Sets the angle unit for all Graphs and 3D Graphing applications in the current document. The default setting is Radian. Set this to Auto if you want graphing angles to follow the Angle setting in the main File > Settings menu. An angle mode indicator shows the resulting mode in Graphs and 3D Graphing applications.
 - Geometry Angle. Sets the angle unit for all Geometry applications in the current document. The default setting is Degree. Set this to Auto if you want geometry angles to follow the Angle setting in the main File > Settings menu. An angle mode indicator shows the resulting mode in Geometry applications.
 - Grid. Sets the grid display in the Graphs application. The default setting is No Grid. Dot Grid and Lined Grid are also available.
 - Automatically hide plot labels. In the Graphs application, hides the label that normally appears next to a graphed relation.
 - **Show axis end values.** Applies only in the Graphs application.
 - **Show tool tips for function manipulation.** Applies only in the Graphs application.
 - Automatically find points of interest. In the Graphs application, shows zeros, minima and maxima while tracing function graphs.
 - Force Geometric Triangle Angles to Integers. Restricts the angles of a triangle to integer values as you create or edit the triangle. This setting applies only in the Geometry View with the Geometry Angle unit set to Degree or Gradian. It does not apply to analytic triangles in Graphing View or to analytic triangles in the Analytic Window of the Geometry View. This setting does not affect existing angles, and it does not apply when constructing a triangle based on previously inserted points. By default, this setting is deselected.
 - **Automatically Label Points.** Applies labels $(A, B, ..., Z, A_1, B_1, and so on)$ to points, lines, and vertices of geometric shapes as you draw them. The labelling sequence starts at A for each page in a document. By default, this setting is deselected.

Note: If you create a new object that uses existing un-labelled points, those point are not automatically labelled in the completed object.

- Click **Restore** to restore all settings to their factory defaults.
- Click Make Default to apply the current settings to the open document and save them as the default for new Graphs and Geometry documents.

Using Context Menus

Context menus provide quick access to commonly used commands and tools that apply to a specific object. For example, you can use a context menu to change an object's line colour or to group a set of selected objects.

- Display the context menu for an object in one of the following ways.
 - Windows®: Right-click the object.
 - Mac[®]: Hold **ℋ** and click the object.
 - Handheld: Move the pointer to the object, and then press ctrl menu.

Finding Hidden Objects in the Graphs or Geometry Application

You can hide and show individual graphs, geometric objects, text, labels, measurements and axis end-values.

To temporarily view hidden graphs or objects or to restore them as shown objects:

1. From the Actions menu, select Hide/Show.

The Hide/Show tool appears in the work area, and all hidden objects become visible in dimmed colours.

- 2. Click a graph or object to toggle its Hide/Show state.
- 3. To apply the changes and close the Hide/Show tool, press ESC.

Inserting a Background Image

You can insert an image as a background for a Graphs or Geometry page. The file format of the image can be .bmp, .jpg or .png.

- 1. From the Insert menu, click Image.
- 2. Navigate to the image you want to insert, select it and then click Open.


For information on moving, resizing, and deleting a background image, see *Working* with Images in the Software.

Adding Text to the Graphs or Geometry Work Area

1. From the Actions menu, select Text.

The Text tool Abl appears in the work area.

- 2. Click the location for the text.
- 3. Type the text in the box that appears, and then press **Enter**.



- 4. To close the Text tool, press ESC.
- 5. To edit the text, double-click it.

Deleting a Relation and its Graph

- Select the relation by clicking its graph.
- Press Backspace or DEL.

The graph is removed from both the work area and the graph history.

Graphing Functions


From the Graph Entry/Edit menu, select Function.

$$fI(x)=$$

2. Type an expression for the function.

$$fI(x)=x^2+1.5$$

3. Press Enter to graph the function.

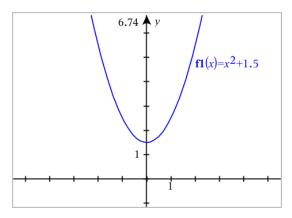

Note: For information about path plots, see Exploring Graphs with Path Plot.

Exploring Graphs with Path Plot

Path Plot lets you animate function, parametric, and polar equation plots in real time to analyse how they are plotted and not just the final plot.

Changing the Path Plot Settings

1. From the Trace menu, select Path Plot > Path Set-up.




- 2. Select the settings you want to use.
 - **Graph Type:** Selects Function, Parametric, or Polar as the graph type.
 - Path Step: Sets the increment of the independent variable at which values are plotted.
 - **Show Future Path:** Toggles the display of all future points for each function past the starting or current point of the graph. You can also toggle this when viewing the graph with the Up/Down arrow keys.
 - Show Point Coordinates: Toggles the display of the coordinates for recorded trace points.

Enabling Path Plot

- Enter your equation(s).
- 2. From the Trace menu, select Path Plot > Function/Parametric/Polar.
- 3. Navigate through the animation by:


- using the Play/Pause/Reset Animation icons
- using the Left/Right arrow keys
- entering a number to jump to that point

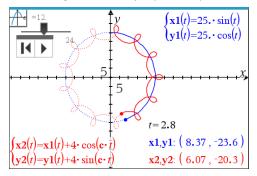

4. Press the Esc key to exit the animation.

Manipulating Functions by Dragging


Some types of functions can be translated, stretched, and/or rotated by dragging parts of the graph. As you drag, the expression for the graph updates to reflect the change.

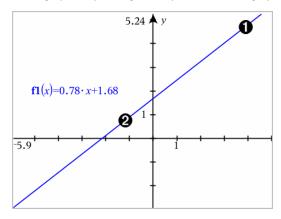


- Drag graph from the ends to rotate.
- Drag graph near the middle to translate.

Manipulating a Linear Function

To translate, grab near the middle of the graph, and then drag.




To rotate, grab near the ends of the graph, and then drag.




Manipulating a Quadratic Function

To translate, grab near the vertex of the graph, and then drag.




To stretch, grab away from the vertex of the graph, and then drag.




Manipulating a Sine or Cosine Function

To translate, grab near the axis of vertical symmetry of the graph, and then drag.



To stretch, grab away from the axis of vertical symmetry of the graph, and then drag.



Specifying a Function with Domain Restrictions

You can use the entry line or the Calculator application to specify a function with domain restrictions. For multiple domain restrictions on a function, use the piecewise() function.


In the following example, a function with a domain that is less than 2 and greater than -2 is specified on the entry line:

1. From the Graph Entry/Edit menu, select Function.

2. Type the following on the entry line, using spaces to separate the "and" operator:

piecewise
$$(3,x>-2 \text{ and } x<2)$$

3. Tap Enter to graph the function.

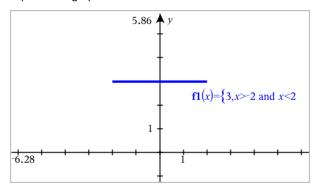

Finding Points of Interest on a Function Graph


The Graphs application helps you find zeros, minimums, maximums, intersections, derivatives (dy/dx), or integrals. For Graphs defined as conic sections, you can also find foci, directrix, and other points.

(CAS): You can also find the point of inflection.

Identifying Points of Interest by Dragging a Point

To quickly identify maximums, minimums, and zeros, create a point on the graph and then drag the point.

Temporary signposts appear as you drag through points of interest.

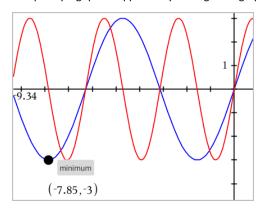


Identifying Points of Interest with Analysis Tools

This example illustrates using the Minimum tool. Other analysis tools operate similarly.


1. From the Analyse Graph menu, select Minimum.

The Minimum icon is displayed at the top left on the work area, and a graph? prompt appears in the work area.

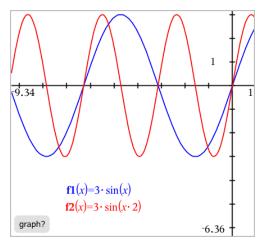


2. Click the graph on which you want to find the minimum.

A dotted line appears, representing the lower bound of the range to search.

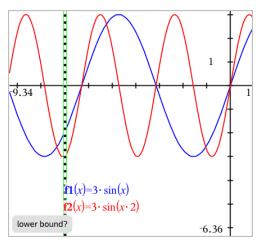


Drag the line or click a location to set the lower bound and display a proposed upper bound.

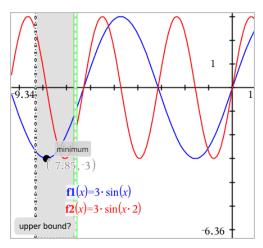

4. Drag the line representing the upper bound, or click a location to set it.

The minimum is displayed, along with a text object showing its coordinates.

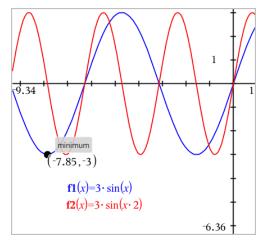

Graphing a Family of Functions

In a family of functions, each member has its own value for one or more of the parameters. By entering the parameters as lists, you can use a single expression to graph a family of up to 16 functions.

For example, the expression $f1(x) = \{-1,0,1,2\} \cdot x + \{2,4,6,8\}$ denotes the following four functions:

$$fl_{-}l(x) = -1 \cdot x + 2$$

 $fl_{-}2(x) = 0 \cdot x + 4$

$$fl_3(x) = 1 \cdot x + 6$$

 $fl_4(x) = 2 \cdot x + 8$


To Graph a Family of Functions

- From the Graph Entry/Edit menu, select Function.
- Type the expression, using lists to represent the members of the family. 2.

$$\mathbf{f1}(x) = \{-1,0,1,2\} \cdot x + \{2,4,6,8\}$$

3. Press Enter to graph the functions.

Each member is labelled separately ($f1 \ 1, f1 \ 2$, and so on) to indicate its sequence in the expression.

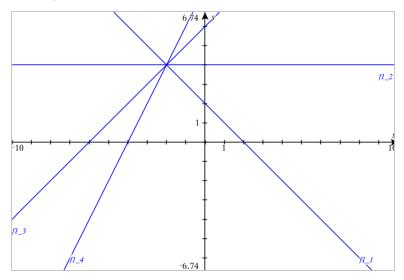


Note: You cannot edit a single function graph to change it to a family of functions.


Graphing Equations

- 1. From the Graph Entry/Edit menu, select Equation.
- 2. Click the type of equation (Line, Parabola, Circle, Ellipse, Hyperbola, or Conic).
- 3. Click the specific template for the equation. For example, tap $y=a \cdot x^2+b \cdot x+c$ to define a parabola.


The entry line includes a symbol to indicate the type of equation.



4. Type the coefficients into the equation template.



5. Press Enter.




Graphing Conic Sections

The Graphing view lets you graph and explore linear and conic equations analytically in a two-dimensional coordinate system. You can create and analyse lines, circles, ellipses, parabolas, hyperbolas, and general conic equations.


The entry line makes it easy to enter the equation by displaying a template for the type of equation you choose.

Example: Creating a conic ellipse


From the Graph Entry/Edit menu, select Equation > Ellipse, and tap the
 equation type.



2. Type initial values for the coefficients in the provided spaces. Use the arrow keys to move among the coefficients.




3. Press Enter to graph the equation.

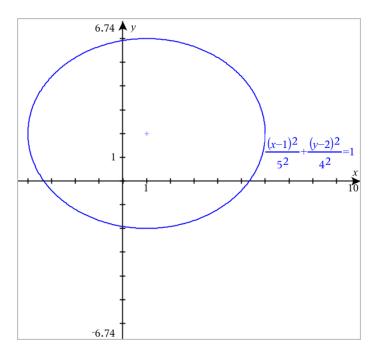


Exploring the sample ellipse

1. Drag the ellipse from its centre to explore the effect of translation on the equation.

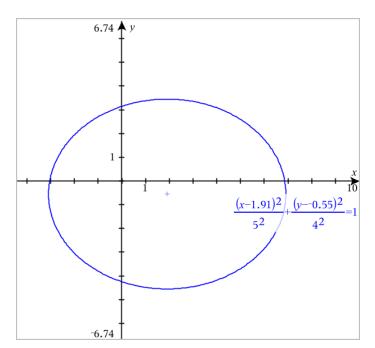


2. Use the analysis tools, such as **Analyse Graph > Analyse Conics > Foci** to further explore the graph.

Note: The type of conic determines which analysis tools you can use. In the case of the ellipse, you can obtain its centre, vertices, foci, axes of symmetry, directrices, eccentricity, and latera recta.

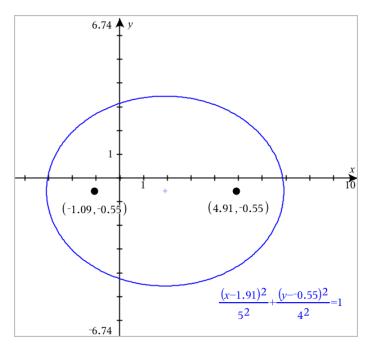

3. To explore translation and dilation interactively, define a conic ellipse that uses variables for the h, k, a, and b coefficients. Insert sliders to vary the parameters.

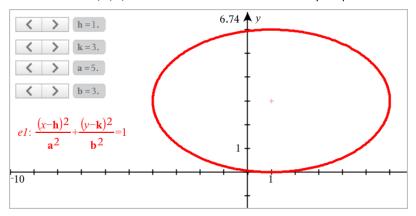

Graphing Relations

Relation graphing is available on Graphs pages and in the Analytic Window of Geometry pages.

You can define relations using \leq , <, =, > or \geq . The inequality operator (\neq) is not supported in relation graphing.

Relation type	Examples
Equations and inequalities equivalent to y = f(x)	 y = sqrt(x) y-sqrt(x) = 1/2 -2*y-sqrt(x) = 1/2 y-sqrt(x) ≥ 1/2 -2*y-sqrt(x) ≥ 1/2
Equations and inequalities equivalent to x = g(y)	 x = sin(y) x-sin(y) = 1/2 x-sin(y) ≥ 1/2
Polynomial equations and inequalities	• $x^2+y^2 = 5$ • $x^2-y^2 \ge 1/2+y$ • $x^3+y^3-6*x*y=0$
The above relations on domains restricted by rectangles	 y=sin(x) and -2π<x≤2π< li=""> y≤x2 y≥-2 and 0≤x≤3 {x²+y²≤3, y≥0 and x≤0 </x≤2π<>

Note: Restrictions imposed by an active Press-to-Test session may limit the types of relations you can graph.

To Graph a Relation:


1. From the Graph Entry/Edit menu, select Relation.



2. Type an expression for the relation.



3. Press Enter to graph the relation.

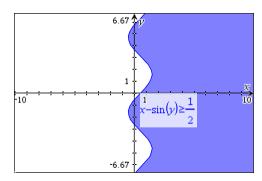

Tips for Graphing Relations

- You can quickly define a relation from the Function entry line. Position the cursor to the immediate right of the = sign, and then press the **Backspace** key. A small menu appears with the relation operators and a Relation option. Choosing from the menu places the cursor in the Relation entry line.
- You can type a relation as text on a Graphs page and then drag the text object over either axis. The relation is graphed and added to the relation history.

Warning and Error Message

Error Condition	Additional Information
Relation input not supported	 Relation input not supported Note: The following relation inputs are supported: Relations using ≤, <, =, >, or ≥. Polynomial relations in x and y Relations equivalent to y=f(x) or x=g(y) or corresponding inequalities The above relations on domains restricted by rectangles
Domain Restrictions not supported for certain classes of relations equivalent to y=f(x) or x=g(y) or corresponding inequalities.	 Relations equivalent to y=f(x) and corresponding inequalities can only have constraints on x For example: y=V(x) and 0≤x≤1 will work but y=V(x) and 0≤y≤1 will not Relations equivalent to x=g(y) and corresponding inequalities can only have constraints on y For example: x=sin(y) -1≤y≤1 will work but x=sin(y) -1≤x≤1 will not

Graphing Parametric Equations

1. From the Graph Entry/Edit menu, select Parametric.


Use the up and down arrow keys to move among the fields in the Parametric entry line.

$$|| \begin{cases} xI(t) = | \\ yI(t) = \\ 0 \le t \le 6.28 \text{ } tstep = 0.13 \end{cases}$$

2. Type expressions for xn(t) and yn(t).

$$\begin{cases} xI(t) = \sin(t) \cdot 4 \\ yI(t) = \cos(t) \cdot 3 \\ 0 \le t \le 6.28 \text{ tstep} = 0.13 \end{cases}$$

- 3. (Optional) Edit the default values for *tmin*, *tmax*, and *tstep*.
- 4. Press Enter.

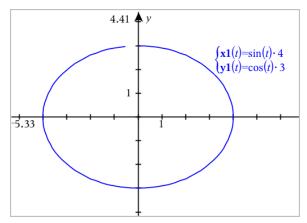

Note: For information about path plots, see Exploring Graphs with Path Plot.

Graphing Polar Equations


1. From the Graph Entry/Edit menu, select Polar.

$$\begin{cases} rI(\theta) = \\ 0 \le \theta \le 6.28 \ \theta step = 0.13 \end{cases}$$

- 2. Type an expression for $rn(\theta)$.
- 3. (Optional) Edit the default values for θmin , θmax , and $\theta step$.

$$\begin{cases} r1(\theta) = .2 \cdot \theta \\ 0 \le \theta \le (\pi \cdot 10) \ \theta step = 0.13 \end{cases}$$

4. Press Enter.

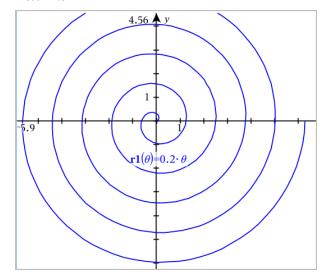

Note: For information about path plots, see Exploring Graphs with Path Plot.

Graphing Scatter Plots

1. (Optional) Create two predefined list variables containing the x and y values to plot. You can use the Lists & Spreadsheet, Calculator, or Notes application to create the lists.

A v1	B v2	С	D
1	2		
2	4		
3	8		
4	16		
5	32		

2. From the Graph Entry/Edit menu, select Scatter Plot.


Use the up and down arrow keys to move between the x and y fields.

s1
$$\begin{cases} x \leftarrow \\ y \leftarrow \end{cases}$$

- 3. Use one of the following methods to specify lists to plot as x and y.
 - Click var to select names of the predefined list variables.
 - Type the names of the variables, such as v1.
 - Type lists as comma-separated elements enclosed within brackets, for example: {1,2,3}.

s1
$$\begin{cases} x \leftarrow \mathbf{v1} \\ y \leftarrow \mathbf{v2} \end{cases}$$

4. Press Enter to plot the data, and then zoom the work area to view the plotted data.

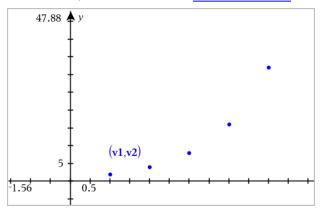


Plotting Sequences

The Graphs application lets you plot two types of sequences. Each type has a separate template for defining the sequence.


Defining a Sequence

1. From the Graph Entry/Edit menu, select Sequence > Sequence.

- 2. Type the expression to define the sequence. Update the independent variable field to m+1, m+2, etc., if necessary.
- 3. Type an initial term. If the sequence expression references more than one prior term, such as u1(n-1) and u1(n-2), (or u1(n) and u1(n+1)), separate the terms with commas.



4. Press Enter.



Defining a Custom Sequence

A custom sequence plot shows the relationship between two sequences by plotting one on the x axis and the other on the y axis.

This example simulates the Predator-Prey model from biology.


1. Use the relations shown here to define two sequences: one for a rabbit population, and another for a fox population. Replace the default sequence names with rabbit and fox.

$$\begin{cases} \mathbf{fox}(n) = \mathbf{fox}(n-1) \cdot (1 + 2.\mathbf{E} - 4 \cdot \mathbf{rabbit}(n-1) - 0.03) \\ Initial\ Terms := 50 \\ 1 \le n \le 400\ nstep = 1 \end{cases}$$


.05 = the growth rate of rabbits if there are no foxes .001 = the rate at which foxes can kill rabbits .0002 = the growth rate of foxes if there are rabbits .03 = the death rate of foxes if there are no rabbits

Note: If you want to see the plots of the two sequences, zoom the window to the Zoom - Fit setting.

- 2. From the Graph Entry/Edit menu, select Sequence > Custom.
- 3. Specify the rabbit and fox sequences to plot on the x and y axes, respectively.




- Press Enter to create the custom plot.
- Zoom the window to the Zoom Fit setting.

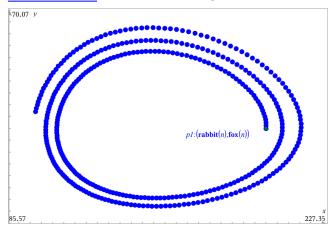

Explore the custom plot by dragging the point that represents the initial term.

Graphing Differential Equations

You can study linear and non-linear differential equations and systems of ordinary differential equations (ODEs), including logistic models and Lotka-Volterra equations (predator-prey models). You can also plot slope and direction fields with interactive implementations of Euler and Runge-Kutta methods.

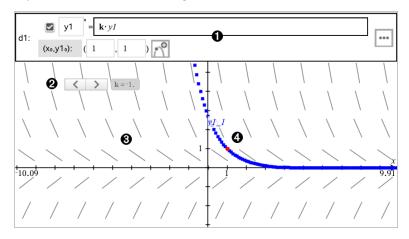

- ODE entry line:
 - v1 ODE identifier
 - Expression k·y1 defines the relation
 - Fields (1,1) for specifying initial condition
 - Buttons for adding initial conditions and setting plot parameters
- Slider to vary coefficient k of the ODE
- Slope field
- A solution curve passing through the initial condition

To Graph a Differential Equation:

1. From the Graph Entry/Edit menu, select Diff Eq.

The ODE is automatically assigned an identifier, such as "y1."




2. Move to the relation field and enter the expression that defines the relation. For example, you might enter -y1+0.1*y1*y2.




Enter the initial condition for the independent value x_0 and for $y1_0$.

Note: The x_0 value(s) are common to all the ODEs in a problem but can be entered or modified only in the first ODE.

(Optional) To study multiple initial conditions for the current ODE, click Add Initial Conditions and enter the conditions.

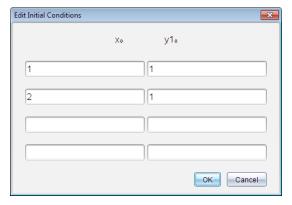

Tap Edit Parameters it to set the plot parameters. Select a numerical Solution Method, and then set any additional parameters. You can change these parameters anytime.

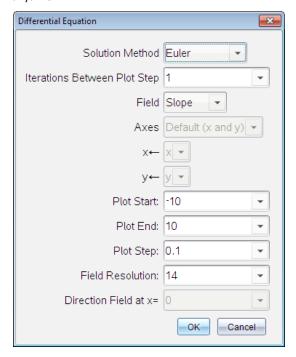

- 6. Click OK.
- 7. To enter additional ODEs, press the down arrow to display the next ODE edit field.

As you move among defined ODEs, the graph is updated to reflect any changes. One solution to the ODE is graphed for each IC specified for each shown ODE (selected by check box).

Summary of Differential Equation Settings

Solution Method	Selects Euler or Runge-Kutta as the numerical solution method.
Iterations Between Plot Step	Computational accuracy for Euler solution method only. Must be an integer value >0. To restore the default, select the down-arrow and select Default .
Error Tolerance	Computational accuracy for Runge-Kutta solution method only. Must be a floating-point value $\ge 1 \times 10^{-14}$. To restore the default, select the downarrow and select Default .

Field	None - No field is plotted. Available for any number of ODEs, but required if three or more 1st-order ODEs are active. Graphs a combination of the solution and/or values of one or more ODEs
	(according to user-configured Axes settings).
	Slope - Plots a field representing the family of solutions to a single 1st- order ODE. Exactly one ODE must be active. Sets Axes to Default (x and y). Sets Horizontal axis to x (the independent variable). Sets Vertical axis to y (the solution to the ODE).
	Direction - Graphs a field in the phase plane representing the relationship between a solution and/or values of a system of two 1st-order ODEs (as specified by the CustomAxes setting). Exactly two ODEs must be active.
Axes	Default (x and y) - Plots x on the x axis and y (the solutions to the active differential equations) on the y axis.
	Custom - Lets you select the values to be plotted on the x and y axes respectively. Valid entries include:
	 x (the independent variable)
	 y1, y2, and any identifiers defined in the ODE editor
	 y1', y2', and any derivatives defined in the ODE editor
Plot Start	Sets the independent variable value at which the solution plot starts.
Plot End	Sets the independent variable value at which the solution plot stops.
Plot Step	Sets the increment of the independent variable at which values are plotted.
Field Resolution	Sets the number of columns of field rendering elements (line segments) used to draw a slope or direction field. You can change this parameter only if Field = Direction or Slope .
Direction Field at x=	Sets the independent variable value at which a direction field is drawn when plotting non-autonomous equations (those that refer to x). Ignored when plotting autonomous equations. You can change this parameter only if Field = Direction .

Viewing Tables from the Graphs Application


You can show a table of values for any relation defined in the current problem.

Note: For details about using tables and instructions for accessing tables from the Lists & Spreadsheet application, see Working with Tables.

Showing a Table

From the Table menu, select Split-screen Table.

The table is displayed with columns of values for the currently defined relations.

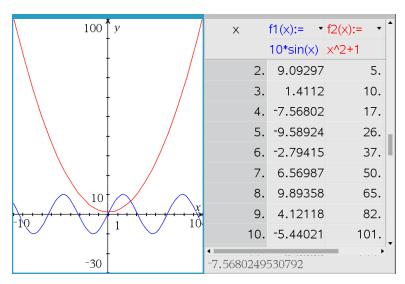


To change which relation is displayed in a column, click the arrow in the top cell of the column, and then select the relation name.

Hiding the Table

From the **Table** menu, select **Remove Table**.

Editing Relations


Double-click the graph to show its expression in the entry line.
 —or—
 Display the graph's context menu, and then click Edit Relation.



2. Modify the expression as needed.

$$f2(x)=x^3-2\cdot x+4$$

3. Press enter to graph the revised function.



Renaming a Relation

Each relation type has a default naming convention. For example, the default name for functions is fn(x). (The number represented by n increases as you create more functions.) You can replace the default name with a name of your choice.

Note: If you want to use a custom name as a convention, you must enter it manually for each function.

1. In the entry line, delete the existing name. For example, delete the "f1" from "f1 (x)". You can use the right and left arrow keys to position the cursor.

(x)=


2. Type the replacement name.

xanr(x)=

3. If you are defining a new relation, position the cursor after the = sign and type the expression.

= $xanr(x)=x^2+3$ \equiv

4. Press **Enter** to graph the relation with its new name.



Accessing the Graph History


For each problem, the software stores a history of relations defined in the Graphs application and 3D Graphing view, such as function graphs f1 through f99 and 3D

function graphs **z1** through **z99**. You can view and edit these items using a button on the entry line.

Viewing the History

- Press Ctrl+G to show the entry line.
- 2. Click the **History Menu** button on the entry line.

The menu is displayed. As you point to the name of each item, its expression appears in the entry line.



- 3. Select the name of the relation you want to view or edit.
- 4. (Optional) From the entry line, use the up and down arrow keys to scroll through the defined relations of the same type.

Viewing the History of Specific Relation Types

Use this method if you want to view or edit a defined relation that does not appear in the History menu.

- 1. On the **Graph Entry/Edit** menu, click the relation type. For example, click **Polar** to show the entry line for the next available Polar relation.
- 2. Click the **History Menu** button , or use the up and down arrow keys to scroll through the defined relations of the same type.

Zooming/Rescaling the Graphs Work Area

Rescaling in the Graphs application affects only the graphs, plots and objects that reside in the Graphing view. It has no effect on objects in the underlying Plane Geometry view.

Rescaling by Dragging Along an Axis

- To rescale the x and y axes proportionally, drag a k mark on either axis.
- ► To rescale only one axis, hold down **Shift** and drag a k mark on the axis.

Zooming Using a Zoom Tool

- From the Window / Zoom menu, select one of the tools.
 - Zoom Box (Click two corners of a box to define the area to show.)
 - Zoom In
 - Zoom Out


Zooming to Predefined Settings

From the Window / Zoom menu, select one of the predefined Zoom settings.


- Zoom Standard
- Zoom Quadrant 1
- Zoom Standard User
- Zoom Standard Trig
- Zoom Standard Data
- Zoom Fit

Entering Custom Window Settings

- From the Window / Zoom menu, select Window Settings.
- 2. Enter a value for each setting. You can use expressions for exact input, as shown below.

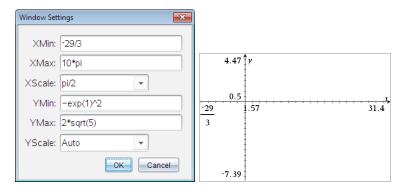

On TI-Nspire™ products, fractional input is preserved as-is. Other exact inputs are replaced with the evaluated result.

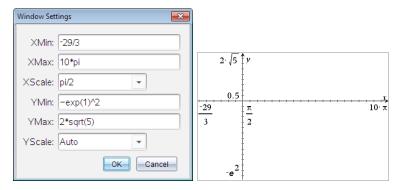

On TI-Nspire™ Exact Arithmetic and CAS products, fractional and other exact inputs are preserved.

Customising the Graphs Work Area

Inserting a Background Image


You can insert an image as a background for any Graphs or Geometry page.

- 1. From the Insert menu, click Image.
- 2. Navigate to the image you want to insert, select it and then click Open.

Adding a Text Object to the Work Area

Use the Text tool to add numeric values, formulas, observations or other explanatory information to the Graphs work area. You can graph an equation entered as text (such as "x=3").

- 1. From the Actions menu, select Text.
- 2. Click the location for the text.
- 3. Type the text in the box that appears, and then press Enter.



To move a text object, drag it. To edit the text, double-click it. To delete a text object, display its context menu, and select **Delete**.

Changing the Attributes of Numeric Text

If you enter a numeric value as text, you can lock it or set its format and displayed precision.

- 1. From the Actions menu, select Attributes.
- 2. Click the numeric text to display its list of attributes.
- 3. Press ▲ and ▼ to move through the list.
- At each attribute icon, press

 or

 to move through the options. For example, select 0 through 9 as the precision.
- Press Enter to apply the changes.
- 6. Press Esc to close the Attributes tool.

Displaying the Grid

By default, the grid is not displayed. You can choose to display it as dots or lines.


From the View menu, select Grid, and then select Dot Grid, Lined Grid, or No Grid.

Changing the Grid Colour

From the Actions menu, choose Select > Grid (available only when the grid is displayed).


The grid flashes to show it is selected.

2. Click the down arrow next to the Colour button, and select a colour for the grid.




Changing the Appearance of the Graph Axes

- From the Actions menu, click Attributes.
- 2. Click either axis.
- Press ▲ and ▼ to move to the desired attribute, and then press ◀ and ▶ to choose the option to apply.





Note: To hide the axes or selectively hide or show an individual axis end-value, use the Hide/Show tool.

To display multiple tick mark labels, select the **Multiple Labels** option.

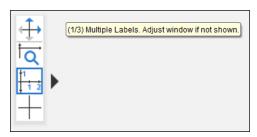


Multiple labels are only displayed if they fit both horizontally and vertically on the axes. If necessary, adjust the values in the **Window / Zoom > Window Settings** dialogue.






Exact Arithmetic and CAS Only: You can change the tick mark labels to display multiples of Pi, radical numbers, and other exact values by editing the **XScale** or **YScale** values in the **Window / Zoom > Window Settings** dialogue. See the following example.



Note: pi/2 will be converted to $\pi/2$ after clicking **OK**.

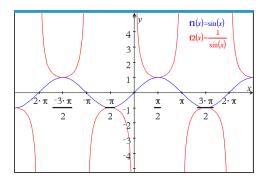

Note: For information about path plots, see Exploring Graphs with Path Plot.


Hiding and Showing Items in the Graphs Application

The Hide/Show tool reveals objects you have previously selected as hidden and lets you select which objects to show or hide.

Note: If you hide a graph, its expression is automatically marked as hidden in the graph history.


1. From the Actions menu, select Hide/Show.

The Hide/Show tool appears at the top of the work area, and currently hidden items (if any) are shown dimmed.

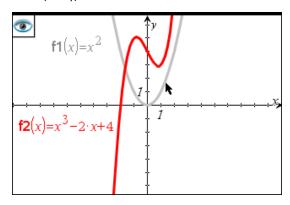

- 2. Click objects to toggle their hide/show status. You can hide graphs, geometric objects, text, labels, measurements, and individual axis end-values.
- 3. Press Esc to complete your selections and close the tool.

All objects you selected as hidden objects disappear.

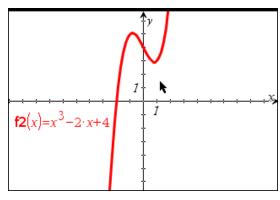

4. To view the hidden objects temporarily or restore them as shown objects, open the Hide/Show tool.

Conditional Attributes

You can cause objects to hide, show, and change colour dynamically, based on specified conditions such as "r1<r2" or "sin(a1)>=cos(a2)."

For example, you might want to hide an object based on a changing measurement that you have assigned to a variable, or you might want an object's colour to change based on a "Calculate" result assigned to a variable.

Conditional behaviours can be assigned to objects or groups in the Graphing, Plane Geometry, and 3D Graphing views.


Setting Conditional Attributes of an Object

You can set conditions of a selected object either by using its context menu or by activating the Set Conditions tool from the Actions menu and then selecting the object. These instructions describe using the context menu.

- 1. Select the object or group.
- 2. Display the object's context menu, and click Conditions.

The conditional attributes are displayed.





For 2D objects


For 3D objects

3. (Optional) In the Show When field, enter an expression specifying the conditions during which the object will be shown. Anytime the condition is not satisfied, the object will be hidden.

You can specify tolerance by using compound conditionals in the Show When input field. For example, area>=4 and area<=6.

Note: If you need to see conditionally hidden objects temporarily, click Actions > Hide/Show. To return to normal viewing, press ESC.

4. (Optional) Enter numbers or expressions that evaluate to numbers in the applicable colour fields, such as Line Colour or Mesh Colour. To see a map of colour values, click the Coors button.

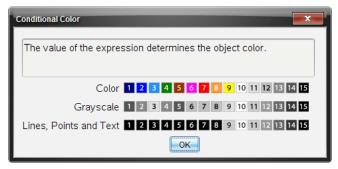

Map of conditional colour values

5. Click **OK** in the Conditional Attributes dialogue box to apply the conditions.

Calculating a Bounded Area

Note: To avoid unexpected results when using this feature, make sure the document setting for "Real or Complex Format" is set to Real.

When you calculate the area between curves, each curve must be:

- A function with respect to x.
 - or -
- An equation in the form y=, including y= equations defined through a text box or a conic equation template.

Defining and Shading the Area

1. From the Analyse Graph menu, select Bounded Area.


If exactly two appropriate curves are available, they are selected automatically, and you can skip to step 3. Otherwise, you are prompted to select two curves.

2. Click two curves to select them.

– or –


Click one curve and the x axis.

You are prompted to set the lower and upper bounds.

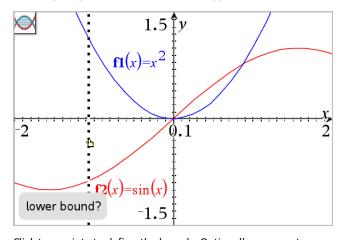

3. Click two points to define the bounds. Optionally, you can type numeric values.

The area becomes shaded, and the area value is displayed. The value is always non-negative, regardless of the interval direction.

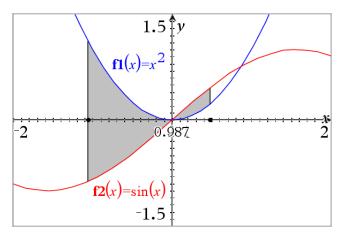

Working with Shaded Areas

As you change the bounds or redefine the curves, the shading and the area value are updated.

- To change the lower or upper bound, drag it or type new coordinates for it. You cannot move a bound that resides on an intersection. However, the point moves automatically as you edit or manipulate the curves.
- To redefine a curve, either manipulate it by dragging or edit its expression in the entry line.

If an endpoint resided originally on an intersection, and the redefined functions no longer intersect, the shading and area value disappear. If you redefine the function (s) so that there is an intersection point, the shading and area value reappear.

- To delete or hide the shaded area, or to change its colour and other attributes, display its context menu.
 - Windows®: Right-click the shaded area.
 - Mac $^{\circ}$: Hold \mathcal{H} and click the shaded area.
 - Handheld: Move the pointer to the shaded area and press ctri | | 2 | .


Tracing Graphs or Plots

Graph Trace lets you move a trace cursor over the points of a graph or plot and displays value information.

Tracing Specific Graphs

1. From the Trace menu, select Graph Trace.

The Graph Trace tool appears at the top of the work area, the trace cursor appears, and the cursor coordinates are displayed in the lower right corner.

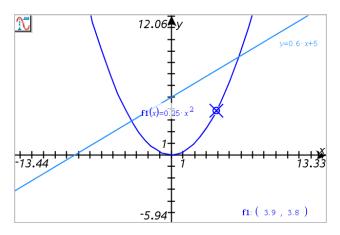

Explore a graph or plot:

- Point to a position on a graph or plot to move the trace cursor to that point.
- Press ◀ or ▶ to step the cursor along the current graph or plot. The screen pans automatically to keep the cursor in view.
- Press \triangle or ∇ to cycle among the displayed graphs.
- Click the trace cursor to create a persistent point. Optionally, enter a specific independent value to move the trace cursor to that value.

3. To stop tracing, press Esc.


Tracing All Graphs

The Trace All tool allows tracing multiple functions simultaneously. With several functions graphed on the work area, perform the following steps:

Note: The Trace All tool traces only function graphs, not plots of other relations (polar, parametric, scatter, sequence).

1. From the Trace menu, select Trace All.

The Trace All tool appears in the work area, a vertical line indicates the x value of the trace, and the coordinates for each traced point are displayed in the lower right corner.

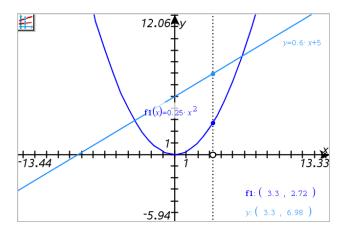

2. Explore the graphs:

- Click a point on the x axis to move all the trace points to that x value.
- Press ◀ or ▶ to step the trace points along all the graphs.
- 3. To stop tracing, press Esc.

Changing the Trace Step

1. From the Trace menu, select Trace Step.



2. Choose Automatic or enter a specific step size for tracing.

Introduction to Geometric Objects


Geometry tools are accessible in both the Graphs and Geometry applications. You can use these tools to draw and investigate objects such as points, lines, and shapes.

- The Graphing view shows the Graphs work area superimposed on the Geometry work area. You can select, measure, and alter objects in both work areas.
- The Plane Geometry view shows only the objects created in the Geometry application.

Objects Created in the Graphs Application

Points, lines, and shapes created in the Graphs application are analytic objects.

- All points that define these objects reside on the x,y graph plane. Objects created here are visible only in the Graphs application. Changing the axes scale affects the appearance of the objects.
- You can display and edit the coordinates of any point on an object.
- You can display the equation of a line, tangent line, circle shape, or geometric conic created in the Graphs application.

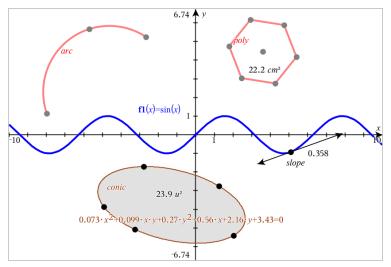


The circle arc and polygon were created in the Geometry application. The sine wave and conic were created in the Graphs application.

Objects Created in the Geometry Application

Points, lines, and shapes created in the Geometry application are not analytic objects.

- Points that define these objects do not reside on the graph plane. Objects created here are visible in both the Graphs and Geometry applications, but they are unaffected by changes to the Graphs x,y axes.
- You cannot obtain the coordinates of an object's points.
- You cannot display the equation of a geometric object created in the Geometry application

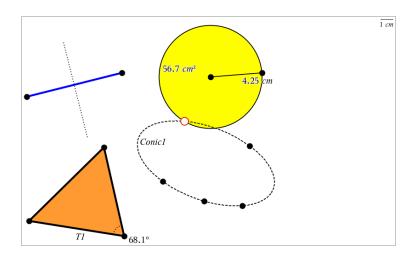

Creating Points and Lines

As you create an object, a tool appears in the work area (for example, **Segment**). To cancel, press ESC. To enable automatic labelling of certain objects, see What You Must Know in this chapter.


Creating a Point on the Work Area

- From the Points and Lines menu, select Point. (In the Graphs application, click Geometry > Points and Lines > Point.)
- 2. Click a location to create the point.
- (Optional) Label the point.
- 4. To move a point, drag it.

Creating a Point on a Graph or Object

You can create a point on a line, segment, ray, axis, vector, circle, graph or axis.


- 1. From the Points and Lines menu, select Point On. (In the Graphs application, click Geometry > Points and Lines > Point On.)
- 2. Click the graph or object on which you want to create the point.
- 3. Click a location on the object to place the point.




Creating a Dynamic Point on a Graph

You can create a dynamic point on a graph with Point by Coordinates.


1. From the Points and Lines menu, select Point by Coordinates. (In the Graphs application, click Geometry > Points and Lines > Point by Coordinates or press P and select Point by Coordinates).

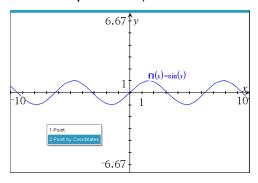

2. Enter the variables or expressions for one or both of the coordinates.

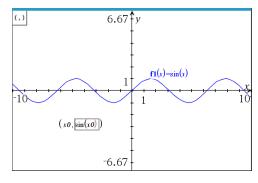

Use the slider that is created to move the point on the graph.

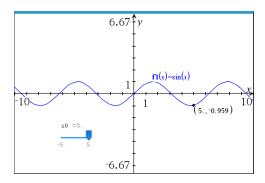


The point will display the actual coordinates. If you hover the cursor over a coordinate, it will display the variable or expression.

To edit the point, double-click the coordinate on the label. Any variable or expression that was entered before is retained.

Identifying Points of Intersection

- 1. From the Points and Lines menu, select Intersection Points. (In the Graphs application, click Geometry > Points and Lines > Intersection Points.)
- 2. Click two intersecting objects to add points at their intersections.



Creating a Line

- 1. From the Points and Lines menu, select Line. (In the Graphs application, click Geometry > Points and Lines > Line.)
- 2. Click a location to define one point on the line.
- Click a second location to define the direction of the line and the length of its visible portion.



4. To move a line, drag its identifying point. To rotate it, drag any point except the identifying point or ends. To extend its visible portion, drag from either end.

Creating a Segment


- 1. From the Points and Lines menu, select Segment. (In the Graphs application, click Geometry > Points and Lines > Segment.)
- 2. Click two locations to define the endpoints of the segment.



3. To move a segment, drag any point other than an endpoint. To manipulate the direction or length, drag either endpoint.

Creating a Ray

- 1. From the Points and Lines menu, select Ray. (In the Graphs application, click Geometry > Points and Lines > Ray.)
- 2. Click a location to define the endpoint of the ray.
- 3. Click a second location to define the direction.




To move a ray, drag its identifying point. To rotate it, drag any point except the identifying point or end. To extend its visible portion, drag from the end.

Creating a Tangent

You can create a tangent line at a specific point on a geometric object or function graph.

- 1. From the Points and Lines menu, select Tangent. (In the Graphs application, click Geometry > Points and Lines > Tangent.)
- 2. Click the object to select it.
- 3. Click a location on the object to create the tangent.

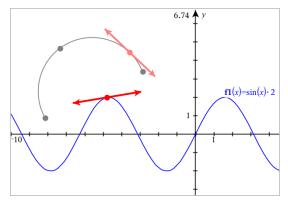


4. To move a tangent, drag it. It remains attached to the object or graph.

Creating a Vector

1. From the Points and Lines menu, select Vector. (In the Graphs application, click **Geometry > Points and Lines > Vector.)**

- 2. Click a location to establish the vector's initial point.
- 3. Click a second location to specify direction and magnitude and complete the vector.




To move a vector, drag any point other than the endpoints. To manipulate the magnitude and/or direction, drag either end point.

Note: If you create an endpoint on an axis or another object, you can move the endpoint only along that object.

Creating a Circle Arc

- From the Points and Lines menu, select Circle Arc. (In the Graphs application, click Geometry > Points and Lines > Circle Arc.)
- 2. Click a location or point to establish the starting point of the arc.
- 3. Click a second point to establish an intermediate point through which the arc will pass.
- 4. Click a third point to set the ending point and complete the arc.



To move an arc, drag its perimeter. To manipulate it, drag any of its three defining points.


Creating Geometric Shapes

The Shape tools let you explore circles, polygons, conics and other geometric objects.

As you create a shape, a tool appears in the work area (for example, Circle \bigcirc). To cancel the shape, press ESC. To enable automatic labelling of certain objects, see What You Must Know, in this chapter.

Creating a Circle

- 1. From the Shapes menu, select Circle. (In the Graphs application, click Geometry > Shapes > Circle.)
- 2. Click a location or point to position the circle's centre point.
- 3. Click a location or point to establish the radius and complete the circle.




4. To resize a circle, drag its perimeter. To move it, drag its centre point.

Creating a Triangle

Note: To ensure that the total of the angles of a triangle equals 180° or 200 gradians, you can force integer angles in the Geometry view. Refer to What You Must Know, in this chapter.


- 1. From the Shapes menu, select Triangle. (In the Graphs application, click Geometry > Shapes > Triangle.)
- 2. Click three locations to establish the vertices of the triangle.



3. To manipulate a triangle, drag any point. To move it, drag any side.

Creating a Rectangle


- From the Shapes menu, select Rectangle. (In the Graphs application, click Geometry > Shapes > Rectangle.)
- 2. Click a location or point to establish the first corner of the rectangle.
- 3. Click a location for the second corner.
 - One side of the rectangle is displayed.
- 4. Click to establish the distance to the opposite side and complete the rectangle.



5. To rotate a rectangle, drag one of its first two points. To extend it, drag one of the last two points. To move it, drag any side.

Creating a Polygon

- From the Shapes menu, select Polygon. (In the Graphs application, click Geometry > Shapes > Polygon.)
- 2. Click a location or point to establish the first vertex of the polygon.
- 3. Click to establish each additional vertex.
- 4. To complete the polygon, click the first vertex.




5. To manipulate a polygon, drag any vertex. To move it, drag any side.

Creating a Regular Polygon

- From the Shapes menu, select Regular Polygon. (In the Graphs application, click Geometry > Shapes > Regular Polygon.)
- Click once on the work area to establish the centre point.
- Click a second location to establish the first vertex and radius. 3.

A 16-sided regular polygon is formed. The number of sides is displayed in brackets; for example, {16}.


- Drag any vertex in a circular motion to set the number of sides.
 - Drag clockwise to reduce the number of sides.
 - Drag counter-clockwise to add diagonals.



5. To resize or rotate a regular polygon, drag any of its points. To move it, drag any side.

Creating an Ellipse


- 1. From the Shapes menu, select Ellipse. (In the Graphs application, click Geometry > Shapes > Ellipse.)
- 2. Click two locations or points to establish the foci.
- Click to establish a point on the ellipse and complete the shape.



To manipulate an ellipse, drag any of its three defining points. To move it, drag its perimeter.

Creating a Parabola (from focus and vertex)


- From the Shapes menu, select Parabola. (In the Graphs application, click Geometry > Shapes > Parabola.)
- 2. Click a location to establish the focus.
- 3. Click a location to establish the vertex and complete the parabola.



To manipulate a parabola, drag its focus or its vertex. To move it, drag it from any other point.

Creating a Parabola (from focus and directrix)


- 1. Create a line to serve as the directrix.
- From the Shapes menu, select Parabola. (In the Graphs application, click Geometry > Shapes > Parabola.)
- 3. Click a location to establish the focus.
- 4. Click the line to establish it as the directrix.



5. To manipulate a parabola, rotate or move its directrix or drag its focus. To move it, select both the directrix and the focus, and then drag either object.

Creating a Hyperbola

- 1. From the Shapes menu, select Hyperbola. (In the Graphs application, click Geometry > Shapes > Hyperbola.)
- 2. Click two locations to establish the foci.
- 3. Click a third location to complete the hyperbola.




4. To manipulate a hyperbola, drag any of its three defining points. To move it, drag it from any other place on the shape.

Creating a Conic by Five Points

- 1. From the Shapes menu, select Conic by Five Points. (In the Graphs application, click **Geometry > Shapes > Conic by Five Points.)**
- 2. Click five locations to establish the five points on the shape.

Depending on the pattern of the points, the conic can be a hyperbola or an ellipse.



3. To manipulate a conic, drag any of its five defining points. To move it, drag it from any other place on the shape.

Creating Shapes Using Gestures (MathDraw)

The MathDraw tool lets you use touchscreen or mouse gestures to create points, lines, circles and other shapes.

MathDraw is available in:

- Geometry view without the analytic window displayed.
- Graphing view when the x scale and y scale are identical. This avoids non-circular ellipses and non-square rectangles appearing as circles and squares.

MathDraw is not available in the 3D Graphing view or in the Geometry view with the analytic window displayed.

Activating MathDraw

- If using the Geometry view with the analytic window visible, use the View menu to hide the window.
- 2. On the Actions menu, select MathDraw.

The MathDraw icon 🌠 appears. You can begin using the tool.

Cancelling MathDraw

▶ When you have finished using the MathDraw tool, press Esc.

The tool also closes if you select a different tool or change views.

Creating Points

To create a labelled point, tap or click in an open area.

 If the point is close to an existing line, segment, ray, geometric conic (including circles) or polygon, the point snaps to that object. You can also place a point on the intersection of any two of those types of objects. If the point is close to a visible grid location in a Graphs view or the analytic window of a Geometry view, it snaps to the grid.

Drawing Lines and Segments

To create a line or segment, touch or click the initial position, and then drag to the end position.

- If the drawn line passes near an existing point, the line snaps to the point.
- If the drawn line starts close to an existing point and ends next to another existing point, it becomes a segment defined by those points.
- If the drawn line is nearly parallel or perpendicular to an existing line, segment or side of a polygon, it aligns to that object.

Note: The default tolerance for detecting parallel/perpendicular lines is 12.5 degrees. This tolerance can be redefined using a variable named ti_gg_fd.angle_tol. You can change the tolerance in the current problem by setting this variable in the calculator app to a value in the range 0 through 45 (0=no parallel/perpendicular detection).

Drawing Circles and Ellipses

To create a circle or ellipse, use the touchscreen or mouse to draw the approximate shape.

- If the drawn shape is sufficiently circular, a circle is created.
- If the shape is elongated, an ellipse is created.
- If the virtual centre of the drawn shape is near an existing point, the circle or ellipse is centred on that point.

Drawing Triangles

To create a triangle, draw a triangle-like shape.

If a drawn vertex is close to an existing point, the vertex snaps to the point.

Drawing Rectangles and Squares

To create a rectangle or square, use the touchscreen or mouse to draw the perimeter.

- If the drawn shape is nearly square, a square is created.
- If the drawn shape is elongated, a rectangle is created.

 If the centre of a square is close to an existing point, the square snaps to that point.

Drawing Polygons

To create a polygon, tap or click a succession of existing points, ending on the first point you tapped.

Using MathDraw to Create Equations

In the Graphs view, MathDraw attempts to recognise certain gestures as functions for analytic parabolas.

Note: The default step value for quantisation of the parabola coefficients is 1/32. The denominator of this fraction can be redefined using a variable named **ti_gg_fd.par_quant**. You can change the step value in the current problem by setting this variable to a value greater or equal to 2. A value of 2, for example, produces a step value of 0.5.

Using MathDraw to Measure an Angle

To measure the angle between two existing lines, use the touchscreen or mouse to draw a circle arc from one of the lines to the other.

- If the intersection point between the two lines does not exist, it is created and labelled.
- The angle is not a directed angle.

Using MathDraw to Find a Mid-point

To create a point midway between two points, tap or click point 1, point 2, and then point 1 again.

Using MathDraw to Erase

To erase objects, use the touchscreen or mouse to drag left and right, similar to the motion of erasing a whiteboard.

- The erasure area is the bounding rectangle of the erasure gesture.
- All point objects and their dependents inside the erasure area are removed.

Basics of Working with Objects

Selecting and Deselecting Objects

You can select an individual object or multiple objects. Select multiple objects when you want to quickly move, colour, or delete them together.

1. Click an object or graph to select it.

The object flashes to indicate selection.

- Click any additional objects to add them to the selection.
- Perform the operation (such as moving or setting colour).
- 4. To deselect all objects, click an empty space in the work area.

Grouping and Ungrouping Geometric Objects

Grouping objects gives you a way to reselect them as a set, even after you have deselected them to work with other objects.

1. Click each object to add it to the current selection.

The selected objects flash.

- Display a context menu of the selected object or objects.
- 3. Click Group. You can now select all the items in the group by clicking any of its members.
- 4. To split a group into individual objects, display a context menu of any of its member objects, and click Ungroup.

Deleting Objects

- Display the context menu of the object or objects.
- Click Delete. 2.

You cannot delete the origin, the axes, or points representing locked variables, even if those items are included in the selection.

Moving Objects

You can move an object, group, or combination of selected objects and groups.

Note: If an immovable object (such as the graph axes or a point with locked coordinates) is included in a selection or group, you cannot move any of the objects. You must cancel the selection and then select only movable items.

To move this	Drag this
A multiple-object selection or group	Any of its objects
A point	The point
A segment or vector	Any point other than an endpoint
A line or ray	The identifying point
A circle	The centre point
Other geometric shapes	Any position on the object except one of its defining points. For example, move a polygon by dragging any of its sides.

Constraining Object Movement

Holding down the SHIFT key before dragging lets you constrain how certain objects are drawn, moved, or manipulated.

Use the constraint feature to:

- Rescale only a single axis in the Graphs application.
- Pan the work area horizontally or vertically, depending on which direction you drag initially.
- Limit object movement to horizontal or vertical.
- Limit point placement to 15° increments as you draw a triangle, rectangle, or polygon.
- Limit angle manipulations to 15° increments.
- Limit the radius of a resized circle to integer values.

Pinning Objects

Pinning objects prevents accidental changes as you move or manipulate other objects.

You can pin graphed functions, geometric objects, text objects, the graph axes, and the background.

- 1. Select the object or objects to pin, or click an empty area if you are pinning the background.
- Display the context menu, and select **Pin**.

A pinned object displays a pin icon $m{7}$ when you point to it.

3. To unpin an object, display its context menu, and select **Unpin**.

Notes:

- Although you cannot drag a pinned point, you can reposition it by editing its x and y coordinates.
- You cannot pan the work area while the background is pinned.

Changing the Line or Fill Colour of an Object

Colour changes made in the software are displayed in shades of grey when you work on documents using a TI-Nspire™ CX handheld that does not support colour. Colour is preserved when you move documents back to the software.

- 1. Select the object or objects.
- Display the object's context menu, click **Colour**, and then click **Line Colour** or Fill Colour.
- 3. Select the colour to apply to the objects.

Changing the Appearance of an Object

- From the Actions menu, select Attributes.
- 2. Click the object that you want to change. You can change shapes, lines, graphs, or graph axes.

The list of the attributes for the selected object are displayed.


- 3. Press ▲ and ▼ to move through the list of attributes.
- select Thick, Thin, or Medium for the Line Weight attribute.
- Press **Enter** to apply the changes.

6. Press **ESC** to close the Attributes tool.

Labelling Points, Geometric Lines, and Shapes

- Display the context menu of the object. 1.
- 2. Click Label.
- Type the text of the label, and then press **Enter**.

The label attaches itself to the object and follows the object as you move it. The label's colour matches the object's colour.

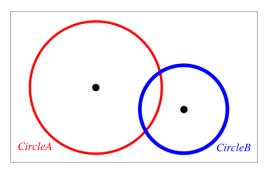


Measuring Objects

Measurement values update automatically as you manipulate the measured object.

Note: Measurements of objects created in the Graphs application are displayed in generic units named u. Measurements of objects created in the Geometry application are displayed in centimetres (cm).


Measuring Length of a Segment, Circle Arc or Vector

- 1. From the Measurement menu, select Length. (In the Graphs application, click Geometry > Measurement > Length.)
- 2. Click the object to display its length.

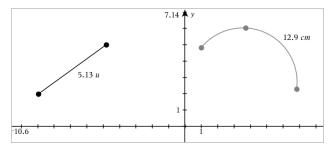

Measuring Distance Between Two Points, a Point and a Line, or a Point and a Circle


- From the Measurement menu, select Length. (In the Graphs application, click Geometry > Measurement > Length.)
- 2. Click the first point.
- 3. Click the second point or a point on the line or circle.

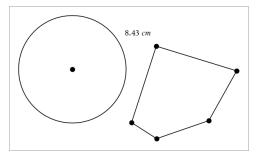

In this example, length is measured from the centre of the circle to the upper left vertex of the polygon.

Measuring Circumference of a Circle or Ellipse or the Perimeter of a Polygon, **Rectangle or Triangle**


- 1. From the Measurement menu, select Length. (In the Graphs application, click Geometry > Measurement > Length.)
- 2. Click the object to display its circumference or perimeter.

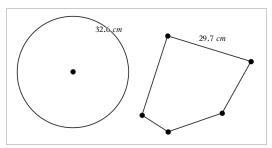

Measuring a Side of a Triangle, Rectangle or Polygon

- 1. From the Measurement menu, select Length. (In the Graphs application, click Geometry > Measurement > Length.)
- 2. Click two points on the object that form the side you want to measure.


Note: You must click *two points* to measure a side. Clicking the side measures the entire length of the object's perimeter.



Measuring Area of a Circle, Ellipse, Polygon, Rectangle or Triangle


Note: You cannot measure the area of a polygon constructed using the Segment tool.

- From the Measurement menu, select Area. (In the Graphs application, click Geometry > Measurement > Area.)
- 2. Click the object to display its area.

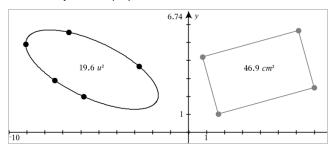

Measuring Slope of a Line, Ray, Segment or Vector

- From the Measurement menu, select Slope. (In the Graphs application, click Geometry > Measurement > Slope.)
- 2. Click the object to display its slope.




The value is updated automatically when you manipulate the object.

Measuring Angles


Measured angles in the Geometry application range from 0° to 180°. Measured angles in the Graphs application range from 0 radians to π radians. To change the angle unit, use the Settings menu.

- 1. From the Measurement menu, select Angle. (In the Graphs application, click Geometry > Measurement > Angle.)
- 2. Click three locations or points to define the angle. The second click defines the vertex.

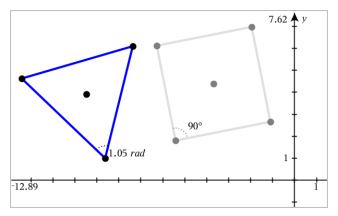


Measuring Angles using the Directed Angle Tool

- 1. From the Measurement menu, select Directed Angle. (In the Graphs application, click Geometry > Measurement > Directed Angle.)
- 2. Click three locations or existing points to define the angle. The second click defines the vertex.



3. To reverse the measurement orientation,

- a) On the Actions menu, select Attributes.
- b) Click the angle text. For example, click 300°.
- c) Select the orientation attribute, and use the right or left arrow key to change it.
- d) Press Esc to close the Attributes tool.



Moving a Measured Value

Drag the measurement to the desired location.

Note: If you move a measurement too far from its object, it stops following the object. However, its value continues to be updated as you manipulate the object.

Editing a Measured Length

You can set the length of a side of a Triangle, Rectangle or Polygon by editing its measured value.

Double-click the measurement, and then enter the new value.

Storing a Measured Value as a Variable

Use this method to create a variable and assign a measured value to it.

- 1. Display the item's context menu, and select **Store**.
- 2. Type a variable name for the stored measurement.

Linking a Measured Length to an Existing Variable

Use this method to assign a measured length value to an existing variable.

- 1. Display the measurement's context menu, and select **Variables > Link to**.
 - The menu shows the list of currently defined variables.
- 2. Click the name of the variable you want to link to.

Deleting a Measurement

Display the measurement's context menu, and select **Delete**.

Locking or Unlocking a Measurement

- 1. Display the measurement's context menu, and select Attributes.
- 2. Use the up/down arrow keys to highlight the Lock attribute.
- 3. Use the left/right arrow keys to close or open the lock.

As long as the value remains locked, manipulations are not allowed that would require the measurement to change.


Transforming Objects

You can apply transformations to drawn objects in both the Graphs and Geometry applications. If the object's points are labelled, the corresponding points in the transformed object are labelled using prime notation $(A \rightarrow A')$. To enable automatic labelling of certain objects, see What You Must Know in this chapter.

Exploring Symmetry

- 1. From the Transformation menu, select Symmetry. (In the Graphs application, click Geometry > Transformation > Symmetry.)
- Click the object whose symmetry you want to explore. 2.
- 3. Click a location or existing point to establish the point of symmetry.

A symmetrical image of the object is displayed.




4. Manipulate the original object or the point of symmetry to explore the symmetry.

Exploring Reflection

1. Create a line or segment to predefine the line about which the object will be reflected.

- 2. From the Transformation menu, select Reflection. (In the Graphs application, click Geometry > Transformation > Reflection.)
- Click the object whose reflection you want to explore.
- Click the predefined reflection line or segment.

A reflected image of the object is displayed.



Manipulate the original object or the line of symmetry to explore the reflection.


Exploring Translation

- (Optional) Create a vector to predefine the distance and direction of translation.
- From the Transformation menu, select Translation. (In the Graphs application, click Geometry > Transformation > Translation.)
- Click the object whose translation you want to explore.
- 4. Click the predefined vector.

-or-

Click two locations on the work area to indicate the direction and distance of translation.

A translated image of the object is displayed.



Manipulate the original object or the vector to explore the translation. 5.


Exploring Rotation

- (Optional) Create an angle measurement to serve as a predefined angle of rotation.
- 2. From the Transformation menu, select Rotation. (In the Graphs application, click Geometry > Transformation > Rotation.)
- Click the object whose rotation you want to explore. 3.
- Click a location or point to define the point of rotation.
- 5. Click the points of the predefined angle.

-or-

Click three locations to define an angle of rotation.

A rotated image of the object is displayed.



Manipulate the original object or the point of rotation to explore the rotation.


Exploring Dilation

Create a Text object containing a numeric value to serve as a predefined dilation factor.

Note: You can also use a measured length value as the dilation factor. Keep in mind that if you use a large value, you may have to pan the display to view the dilated object.

- 2. From the Transformation menu, select Dilation. (In the Graphs application, click Geometry > Transformation > Dilation.)
- Click the object whose dilation you want to explore.
- 4. Click a location or existing point to define the centre point of dilation.
- Click the Text object or measurement that defines the dilation factor.

A dilated image of the object is displayed.

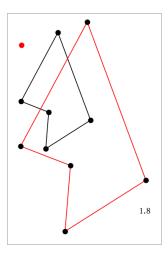

6. Manipulate the original object or the centre point of dilation to explore the dilation. You can also edit the dilation factor.

Exploring with Geometric Construction Tools


You can investigate scenarios by adding objects from the Construction tools. The constructions are dynamic. The midpoint of a line segment, for example, is updated automatically when you manipulate the endpoints.

While a construction is in progress, a tool appears in the work area (for example, Parallel (27). To cancel, press ESC.

Creating a Midpoint

This tool lets you bisect a segment or define a midpoint between any two points. The points can be on a single object, on separate objects, or on the work area.


- 1. From the Construction menu, select Midpoint. (In the Graphs application, click Geometry > Construction > Midpoint.)
- 2. Click a point or location to define the first point.
- 3. Click a second point or location to complete the midpoint.



Creating a Parallel Line

This tool creates a parallel line with respect to any existing line. The existing line can be a Graphs axis or any side of a triangle, square, rectangle, or polygon.

- 1. From the Construction menu, select Parallel. (In the Graphs application, click Geometry > Construction > Parallel.)
- 2. Click the object that will serve as the reference line.
- 3. Click a location to create the parallel line.




You can drag the parallel line to move it. If you manipulate the reference object, the line remains parallel.

Creating a Perpendicular Line

You can create a line that is perpendicular to a reference line. The reference can be an axis, an existing line, a segment, or one side of a triangle, rectangle, or polygon.

- 1. From the Construction menu, select Perpendicular. (In the Graphs application, click **Geometry > Construction > Perpendicular.**)
- 2. Click a location or existing point through which the perpendicular line should pass.
- 3. Click the item that will serve as the reference line.

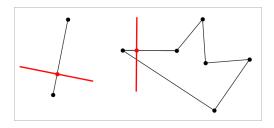

You can drag the intersection point to move the perpendicular. If you manipulate the reference object, the line remains perpendicular.


Creating a Perpendicular Bisector

You can create a perpendicular bisector on a segment, on one side of a triangle, rectangle, or polygon, or between any two points.

- From the Construction menu, select Perpendicular Bisector. (In the Graphs application, click Geometry > Construction > Perpendicular Bisector.)
- 2. Click the item that will serve as the reference line.

-or-


Click two points to create a perpendicular bisector between them.

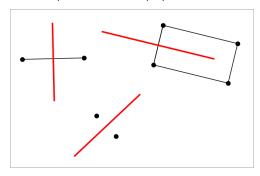

Bisecting an Angle

This tool creates an angle bisector. The points of the angle can be on existing objects, or they can be locations on the work area.

- From the Construction menu, select Angle Bisector. (In the Graphs application, click Geometry > Construction > Angle Bisector.)
- 2. Click three locations or points to define the angle. The second click defines the vertex of the angle.

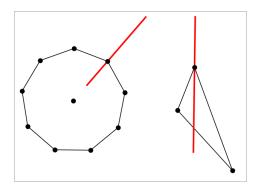


The angle bisector adjusts automatically as you manipulate its defining points.


Creating a Locus

The Locus tool enables you to explore the range of motion of one object with respect to another object as constrained by a shared point.

- 1. Create a segment, line, or circle.
- 2. Create a point on the segment, line, or circle.



3. Create another object that uses the point created in the previous step.



Circle created to use the defined point on the segment.

- 4. From the Construction menu, select Locus. (In the Graphs application, click Geometry > Construction > Locus.)
- 5. Click the point shared by the objects.
- 6. Click the object defined to share the point (this is the object to vary).

The continuous locus is displayed.



Creating a Compass

This tool operates similarly to a geometric compass used for drawing circles on paper.

- 1. From the Construction menu, select Compass. (In the Graphs application, click Geometry > Construction > Compass.)
- 2. To set the width (radius) of the compass:

Click a segment.


-or-

Click any side of a triangle, rectangle, polygon, or regular polygon.

-or-

Click any two existing points or locations on the work area.

Click a location to establish the centre of the circle and complete the construction.

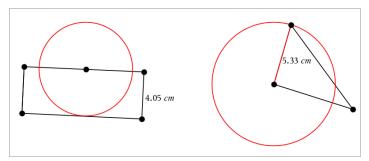

The radius adjusts automatically as you manipulate the original segment, side, or points used to define the radius.

Animating Points on Objects

You can animate any point created as a point on an object or graph. Multiple points can be animated simultaneously.

Animating a Point

- From the Actions menu, select Attributes.
- Click the point to display its attributes. 2.
- Press ▼ to select the animation attributes.
- Press ◀ or ▶ to choose either unidirectional or alternating animation.
- 5. Type a value to set the animation speed. Any nonzero speed begins the animation. To reverse the direction, enter a negative value.
- Press **Enter** to display the animation controls .
- Press **ESC** to close the Attributes tool.

Pausing and Resuming All Animations

- To pause all animations on a page, click Pause ...
- To resume all animations, click Play | .

Resetting All Animations

Resetting pauses all animations and returns all animated points to the positions they occupied when they were first animated.

► To reset animation, click **Reset** [...


Changing or Stopping the Animation of a Point

- 1. Click **Reset** ▶ to stop all animation.
- 2. From the Actions menu, select Attributes.
- 3. Click the point to display its attributes.
- Select the animation attribute, and type a new animation speed. To stop the point's animation, enter zero.

Note: If other animated points exist, the animation controls remain in the work

Adjusting Variable Values with a Slider

A slider control lets you interactively adjust or animate the value of a numeric variable. You can insert sliders in the Graphs, Geometry, Notes and Data & Statistics applications.

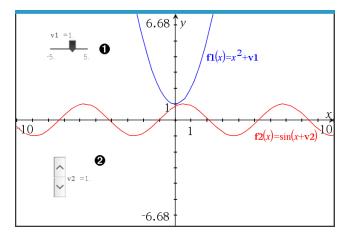

- \bullet Horizontal slider for adjusting variable v1.
- **2** Minimised vertical slider for adjusting variable v2.

Note: TI-Nspire[™] version 4.2 or higher is required for opening .tns files containing sliders on Notes pages.

Inserting a Slider Manually

From a Graphs, Geometry or Data & Statistics page, select Actions > Insert Slider. -or-


From a Notes page, make sure the cursor is not in a maths box or chem box, and then select Insert > Insert Slider.

The Slider Settings screen opens.



2. Enter the desired values, and click OK.

The slider is displayed. On a Graphs, Geometry or Data & Statistics page, handles are displayed to let you move or stretch the slider.




To remove the handles and use the slider, click an empty space in the work area. You can show the handles any time by selecting Move from the slider's context menu.

- 3. To adjust the variable, slide the pointer (or click the arrows on a minimised slider).
 - You can use the **Tab** key to move the focus to a slider or to move from one slider to the next. The colour of the slider changes to show you when it has the focus.
 - When a slider has the focus, you can use the arrow keys to change the value of the variable.

Working with the Slider

Use the options on the context menu to move or delete the slider, and to start or stop its animation. You can also change the slider's settings.


1. Display the slider's context menu.



2. Click an option to select it.

Automatic Sliders in Graphs

Sliders can be created for you automatically in the Graphs application and in the analytic window of the Geometry application. You are offered automatic sliders when you define certain functions, equations or sequences that refer to undefined variables.

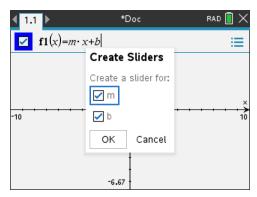


Labelling (Identifying) the Coordinates of a Point

The Graphs application can identify and label the coordinates of any existing point, provided the point was created in the Graphs application.

1. From the Actions menu, select Coordinates and Equations.

The tool appears at the top of the work area

2. Tap the point whose coordinates you want to show.

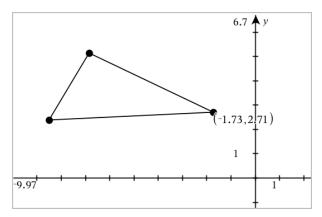

3. Press Esc to close the tool.

If you later move the point to a different location, the coordinates follow the point and update automatically.

Displaying the Equation of a Geometric Object

You can display the equation of a line, tangent line, circle shape, or geometric conic, provided the object was constructed in the Graphing View or within the Analytic Window of the Plane Geometry View.


Note: Due to differences in the numerical representations of analytic and geometric conics, the capability to convert a geometric conic to an analytic template may sometimes be unavailable. This is done in order to avoid a situation where the template-based conic would be different from the geometric one.

- 1. From the Actions menu, click Coordinates and Equations.
- 2. Move the pointer to the object.

The equation for the object appears.

Note: If you approach a defined point on the line or the centre point of a circle, the coordinates of that point are displayed instead of the equation. Move the pointer away from the defined point to obtain the equation of the object.

- 3. Click to attach the equation to the pointer.
- 4. Move the equation to the desired location, and click to anchor it.



5. Press Esc to exit the tool.


Using the Calculate Tool

The Calculate tool is available in the Graphs and Geometry applications. It lets you evaluate a maths expression you have entered as a text object.

The following example uses the Calculate tool to calculate the measured angles of a triangle.


1. Using the **Shapes** menu, create a triangle and then measure its angles.

Tip: You can enable options to automatically label points and to force geometric triangle angles to integers. For more information, see *What You Must Know*, in this chapter.



- 2. From the Actions menu, click Text.
- 3. Click a location for the text, and type the formula for the calculation.

In this example, the formula calculates three terms.




- 4. From the Actions menu, click Calculate.
- 5. Click the formula you created.

You are prompted to select a value for each term in the formula.

6. Click each angle measurement when prompted.

Note: If you have stored a measurement as a variable, you can select it when prompted by clicking on. If the name of a stored measurement matches a term in the formula, you can press "L" when prompted for that term.

After you have selected the third term, the calculation result attaches itself to the pointer.



7. Position the result, and press **Enter** to anchor it as a new text object.

3D Graphs

The 3D Graphing view lets you create and explore three-dimensional graphs of:

- 3D functions of the form z(x,y)
- 3D parametric plots

Selecting the 3D Graphing View


The 3D Graphing View is available on any Graphs page



or Geometry page



From the View menu, select 3D Graphing.

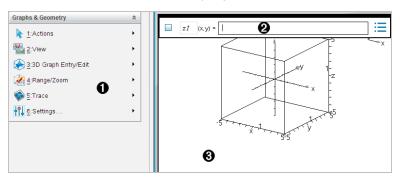

- **3D Graphs Menu**
- **2** Entry line. Lets you define 3D graphs. The default graph type is 3D Function, indicated by zI(x,y)=.
- 3D Graphs Work Area. Shows a 3D box containing graphs that you define. Drag to rotate the box.

Graphing 3D Functions


1. In the 3D Graphing view, select **3D Graph Entry/Edit > Function**.

The entry line appears.

2. Enter the expression that defines the graph. You can type the expression or build it using expression templates.

$$z1 \quad (x,y) = \frac{12 \cdot \cos\left(\frac{x^2 + y^2}{4}\right)}{3 + x^2 + y^2}$$

Press Enter to create the graph and hide the entry line. You can show or hide the entry line anytime by pressing Ctrl+G.

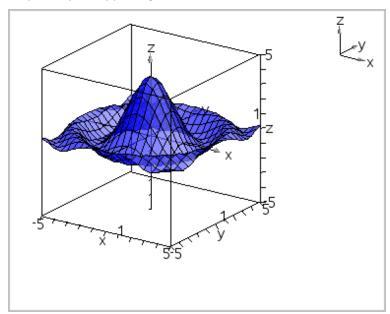


Graphing 3D Parametric Equations

1. In the 3D Graphing view, select **3D Graph Entry/Edit > Parametric**.


The entry line appears.




2. Type the equations that define the graph.



3. Press Enter to draw the graph and hide the entry line and keyboard. You can show or hide the entry line anytime by pressing Ctrl+G.



 To set the graphing parameters tmin, tmax, umin, and umax, display the graph's context menu, and select Edit Parameters.



Rotating the 3D View

Rotating Manually

- 1. Press **R** to activate the Rotation tool.
- 2. Press any of the four arrow keys to rotate the graph.

Rotating Automatically

Auto rotation is equivalent to holding down the right arrow key.

Press A.

The Auto Rotation icon 😂 appears, and the graph rotates.

- 2. (Optional) Use the up and down arrow keys to explore the rotating graph.
- 3. To stop the rotation and return to the Pointer tool, press Esc.

Viewing from Specific Orientations

- 1. If necessary, press **Esc** to return to the Pointer tool.
- 2. Use letter keys to select the orientation:
 - Press **Z**, **Y**, or **X** to view along the z, y, or x axis.
 - Press letter O to view from the default orientation.

Editing a 3D Graph

1. Double-click the graph to show its expression in the entry line.

Display the graph's context menu, and then click Edit Relation.

- 2. Modify the existing expression, or type a new expression in the entry line.
- 3. Press Enter.

Accessing the Graph History

For each problem, the software stores a history of relations defined in the Graphs application and 3D Graphing view, such as function graphs f1 through f99 and 3D function graphs z1 through z99. You can view and edit these items using a button on the entry line.

Viewing the History

- 1. Press Ctrl+G to show the entry line.
- 2. Click the **History Menu** button on the entry line.

The menu is displayed. As you point to the name of each item, its expression appears in the entry line.



- 3. Select the name of the relation you want to view or edit.
- 4. (Optional) From the entry line, use the up and down arrow keys to scroll through the defined relations of the same type.

Viewing the History of Specific Relation Types

Use this method if you want to view or edit a defined relation that does not appear in the History menu.

- 1. On the **Graph Entry/Edit** menu, click the relation type. For example, click **Polar** to show the entry line for the next available Polar relation.
- 2. Click the **History Menu** button —, or use the up and down arrow keys to scroll through the defined relations of the same type.

Changing the Appearance of a 3D Graph


Setting Wire and Surface Colour:

- Display the graph's context menu, click Colour, and then click Line Colour or Fill Colour.
- 2. Click a colour swatch to apply it.

Setting Custom Plot Colours:

You can assign different colours to a graph's top and bottom surfaces or choose to have the graph coloured automatically, based on height or steepness. You can also set the wire colour.

1. Display the graph's context menu, and then click Colour > Custom Plot Colour.



- Select one of the three Surface colour options: Top/bottom colour, Vary colour by height, or Vary colour by steepness.
 - If you choose Top/bottom colour, click the colour swatches to select colours for the top and bottom surfaces.
 - If you choose to vary colour by height or steepness, colours are determined automatically.
- 3. To set the Wire colour, click the colour swatch and select a colour.

Setting Other Attributes of a Graph:

- Display the graph's context menu, and then click Attributes. You can set the following attributes for the selected graph.
 - format: surface+wire, surface only, or wire only

- x resolution (enter a value in range 2-200*, default=21)
- y resolution (enter a value in range 2-200*, default=21)
- transparency (enter a value in range 0-100, default=30)
- * Handhelds are limited to a maximum display resolution of 21, regardless of the value entered.
- 2. Set the attributes as you like, and then press Enter to accept the changes.

Showing or Hiding a Graph's Label

▶ Display the graph's context menu, and then click **Hide Label** or **Show Label**.

Showing and Hiding 3D Graphs

- In the 3D Graphing view, select Actions > Hide/Show.
 - The Hide/Show tool appears, and all hidden items are displayed in grey.
- 2. Tap a graph to change its hide/show state.
- 3. To apply the changes and dismiss the tool, press Esc.

Note: If you want to show or hide only the graph's label, see <u>Showing or Hiding a Graph's Label</u>.

Customising the 3D Viewing Environment

Setting the Background Colour


Display the context menu for the work area, and then click Background Colour.


Showing or Hiding Specific View Elements

From the View menu, click the item to show or hide. You can choose items such as the 3D box, axes, box end values and legend.

Changing the 3D Projection

From the View menu, click Orthographic Projection or Perspective View.





Orthographic Projection (default)

Perspective View

Setting the Visual Attributes of the Box and Axes

- Display the context menu for the box, and then click Attributes. You can set the following attributes.
 - Show or hide tic labels
 - Show or hide end values
 - Show or hide arrows on axes
 - Show 3D or 2D arrow heads
- 2. Set the attributes as you like, and then press **Enter** to accept the changes.

Shrinking or Magnifying the 3D View

From the Range/Zoom menu, click Shrink Box or Magnify Box.

Changing the 3D Aspect Ratio

- 1. From the Range/Zoom menu, click Aspect Ratio.
- 2. Enter values for the x, y and z axes. The default value for each axis is 1.

Changing the Range Settings

- On the Range/Zoom menu, click Range Settings. You can set the following parameters.
 - XMin (default=-5)
 - XMax (default=5)
 - XScale (default=Auto) You can enter a numeric value.
 - YMin (default=-5)
 - YMax (default=5)
 - YScale (default=Auto) You can enter a numeric value.

- ZMin (default=-5)
 ZMax (default=5)
 ZScale (default=Auto) You can enter a numeric value.
- eye θ° (default=35) eye ϕ° (default=160) eye distance (default=11)


Tracing in the 3D View

1. From the Trace menu, select z Trace.

The z Trace icon and the trace plane appear, along with a text line showing the current "z=" trace value.

2. To move the trace, hold down **Shift** and press the up or down arrow key.

The "z=" text is updated as you move.

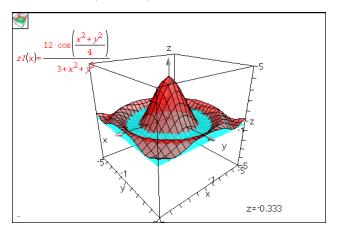

- 3. (Optional) Use the four arrow keys to rotate the view and see how the trace plane and the graph intersect.
- 4. To stop tracing and return to the Pointer tool, press Esc.

Changing the Trace Settings

1. From the Trace menu, select Trace Setup.

The 3D Trace Setup dialogue box opens.




- 2. Enter or select the settings, and click **OK** to apply them.
- 3. If you are not already tracing, your new settings take effect the next time you trace.

Example: Creating an Animated 3D Graph


- 1. Insert a new problem and select the 3D Graphing view.
- From the Actions menu, select Insert Slider, click to position it, and type time as the variable name.
- 3. Display the slider's context menu, click **Settings**, and enter the following values.

Value: 3.8 Minimum: 3.2 Maximum: 4.4 Step Size: 0.1


4. In the entry line, define the function shown here:



5. Drag the slider thumb to see the effect of varying *time*.

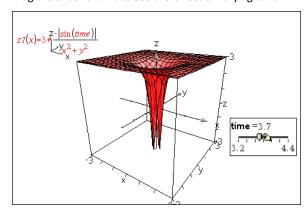

- 6. Add visual interest. For example:
 - Change the background colour of the work area.
 - Hide the box, axes, or legend.
 - Automatically rotate the graph.
 - Change the graph's fill colour and hide its lines.
 - Change the graph's transparency and shading.

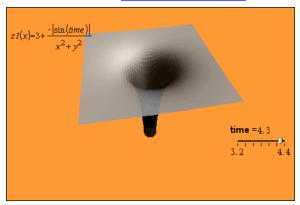

7. To animate the graph, display the slider's context menu, and click Animate. (To stop, click **Stop Animate** from the context menu.)

You can combine manual or auto rotation with the slider animation. Experiment with the x and y resolution to balance curve definition against animation smoothness.

Geometry Application

The Geometry application lets you:

- Create and explore geometric objects and constructions.
- Manipulate and measure geometric objects.
- Animate points on objects and explore their behaviour.
- Explore object transformations.

Adding a Geometry Page

To start a new document with a blank Geometry page:


From the main File menu, click New Document, and then click Add Geometry.

Handheld: Press file on, and select Geometry ...

To add a Geometry page in the current problem of an existing document:

From the toolbar, click Insert > Geometry.

Handheld: Press doc and select Insert > Geometry.

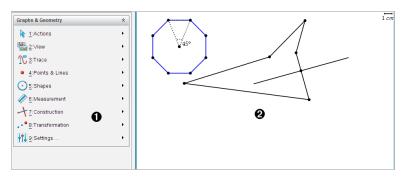

- Geometry menu Available anytime you are viewing a Geometry page.
- Geometry work area -- The area where you create and explore geometric objects.

What You Must Know

Changing the Graphs and Geometry Settings

- 1. From the Settings menu in the Documents Toolbox, select Settings.
- 2. Select the settings that you want to use.
 - Display Digits. Sets the display format for numbers as Floating or Fixed decimal.

- **Graphing Angle.** Sets the angle unit for all Graphs and 3D Graphing applications in the current document. The default setting is Radian. Set this to Auto if you want graphing angles to follow the Angle setting in the main File > Settings menu. An angle mode indicator shows the resulting mode in Graphs and 3D Graphing applications.
- Geometry Angle. Sets the angle unit for all Geometry applications in the current document. The default setting is Degree. Set this to Auto if you want geometry angles to follow the Angle setting in the main File > Settings menu. An angle mode indicator shows the resulting mode in Geometry applications.
- Grid. Sets the grid display in the Graphs application. The default setting is No Grid. Dot Grid and Lined Grid are also available.
- Automatically hide plot labels. In the Graphs application, hides the label that normally appears next to a graphed relation.
- Show axis end values. Applies only in the Graphs application.
- **Show tool tips for function manipulation.** Applies only in the Graphs application.
- Automatically find points of interest. In the Graphs application, shows zeros, minima and maxima while tracing function graphs.
- Force Geometric Triangle Angles to Integers. Restricts the angles of a triangle to integer values as you create or edit the triangle. This setting applies only in the Geometry View with the Geometry Angle unit set to Degree or Gradian. It does not apply to analytic triangles in Graphing View or to analytic triangles in the Analytic Window of the Geometry View. This setting does not affect existing angles, and it does not apply when constructing a triangle based on previously inserted points. By default, this setting is deselected.
- **Automatically Label Points.** Applies labels $(A, B, ..., Z, A_1, B_1, and so on)$ to points, lines, and vertices of geometric shapes as you draw them. The labelling sequence starts at A for each page in a document. By default, this setting is deselected.

Note: If you create a new object that uses existing un-labelled points, those point are not automatically labelled in the completed object.

- Click **Restore** to restore all settings to their factory defaults.
- Click Make Default to apply the current settings to the open document and save them as the default for new Graphs and Geometry documents.

Using Context Menus

Context menus provide quick access to commonly used commands and tools that apply to a specific object. For example, you can use a context menu to change an object's line colour or to group a set of selected objects.

- Display the context menu for an object in one of the following ways.
 - Windows®: Right-click the object.
 - Mac[®]: Hold # and click the object.
 - Handheld: Move the pointer to the object, and then press ctrl menu.

Finding Hidden Objects in the Graphs or Geometry Application

You can hide and show individual graphs, geometric objects, text, labels, measurements and axis end-values.

To temporarily view hidden graphs or objects or to restore them as shown objects:

1. From the Actions menu, select Hide/Show.

The Hide/Show tool <a> appears in the work area, and all hidden objects become visible in dimmed colours.

- 2. Click a graph or object to toggle its Hide/Show state.
- 3. To apply the changes and close the Hide/Show tool, press ESC.

Inserting a Background Image

You can insert an image as a background for a Graphs or Geometry page. The file format of the image can be .bmp, .jpg or .png.

- 1. From the Insert menu, click Image.
- 2. Navigate to the image you want to insert, select it and then click Open.

For information on moving, resizing, and deleting a background image, see <u>Working</u> with Images in the Software.


Adding Text to the Graphs or Geometry Work Area

1. From the Actions menu, select Text.

The Text tool $\frac{|AbI|}{|AbI|}$ appears in the work area.

2. Click the location for the text.

3. Type the text in the box that appears, and then press **Enter**.



- 4. To close the Text tool, press **ESC**.
- 5. To edit the text, double-click it.

Deleting a Relation and its Graph

- 1. Select the relation by clicking its graph.
- 2. Press Backspace or DEL.

The graph is removed from both the work area and the graph history.

Introduction to Geometric Objects


Geometry tools are accessible in both the Graphs and Geometry applications. You can use these tools to draw and investigate objects such as points, lines, and shapes.

- The Graphing view shows the Graphs work area superimposed on the Geometry work area. You can select, measure, and alter objects in both work areas.
- The Plane Geometry view shows only the objects created in the Geometry application.

Objects Created in the Graphs Application

Points, lines, and shapes created in the Graphs application are analytic objects.

- All points that define these objects reside on the x,y graph plane. Objects created here are visible only in the Graphs application. Changing the axes scale affects the appearance of the objects.
- You can display and edit the coordinates of any point on an object.
- You can display the equation of a line, tangent line, circle shape, or geometric conic created in the Graphs application.

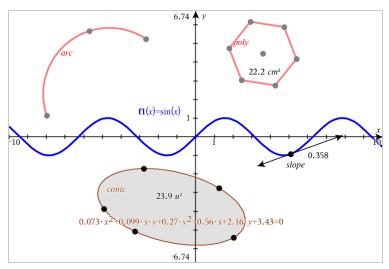


The circle arc and polygon were created in the Geometry application. The sine wave and conic were created in the Graphs application.

Objects Created in the Geometry Application

Points, lines, and shapes created in the Geometry application are not analytic objects.

- Points that define these objects do not reside on the graph plane. Objects created here are visible in both the Graphs and Geometry applications, but they are unaffected by changes to the Graphs x,y axes.
- You cannot obtain the coordinates of an object's points.
- You cannot display the equation of a geometric object created in the Geometry application

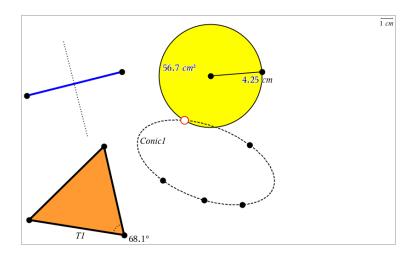

Creating Points and Lines

As you create an object, a tool appears in the work area (for example, **Segment**). To cancel, press ESC. To enable automatic labelling of certain objects, see What You Must Know in this chapter.


Creating a Point on the Work Area

- From the Points and Lines menu, select Point. (In the Graphs application, click Geometry > Points and Lines > Point.)
- 2. Click a location to create the point.
- (Optional) Label the point.
- 4. To move a point, drag it.

Creating a Point on a Graph or Object

You can create a point on a line, segment, ray, axis, vector, circle, graph or axis.


- 1. From the Points and Lines menu, select Point On. (In the Graphs application, click Geometry > Points and Lines > Point On.)
- 2. Click the graph or object on which you want to create the point.
- 3. Click a location on the object to place the point.




Creating a Dynamic Point on a Graph

You can create a dynamic point on a graph with Point by Coordinates.


1. From the Points and Lines menu, select Point by Coordinates. (In the Graphs application, click Geometry > Points and Lines > Point by Coordinates or press P and select Point by Coordinates).

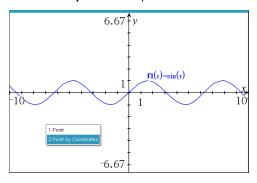

2. Enter the variables or expressions for one or both of the coordinates.

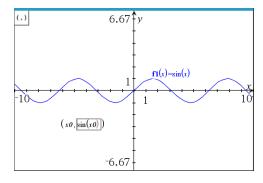

Use the slider that is created to move the point on the graph.

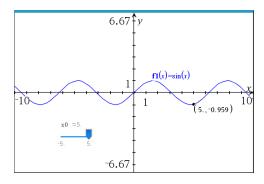


The point will display the actual coordinates. If you hover the cursor over a coordinate, it will display the variable or expression.

To edit the point, double-click the coordinate on the label. Any variable or expression that was entered before is retained.


Identifying Points of Intersection

- 1. From the Points and Lines menu, select Intersection Points. (In the Graphs application, click Geometry > Points and Lines > Intersection Points.)
- 2. Click two intersecting objects to add points at their intersections.



Creating a Line

- 1. From the Points and Lines menu, select Line. (In the Graphs application, click Geometry > Points and Lines > Line.)
- 2. Click a location to define one point on the line.
- 3. Click a second location to define the direction of the line and the length of its visible portion.



4. To move a line, drag its identifying point. To rotate it, drag any point except the identifying point or ends. To extend its visible portion, drag from either end.

Creating a Segment

- 1. From the Points and Lines menu, select Segment. (In the Graphs application, click Geometry > Points and Lines > Segment.)
- 2. Click two locations to define the endpoints of the segment.



3. To move a segment, drag any point other than an endpoint. To manipulate the direction or length, drag either endpoint.

Creating a Ray

- 1. From the Points and Lines menu, select Ray. (In the Graphs application, click Geometry > Points and Lines > Ray.)
- 2. Click a location to define the endpoint of the ray.
- 3. Click a second location to define the direction.




To move a ray, drag its identifying point. To rotate it, drag any point except the identifying point or end. To extend its visible portion, drag from the end.

Creating a Tangent

You can create a tangent line at a specific point on a geometric object or function graph.

- 1. From the Points and Lines menu, select Tangent. (In the Graphs application, click Geometry > Points and Lines > Tangent.)
- 2. Click the object to select it.
- 3. Click a location on the object to create the tangent.

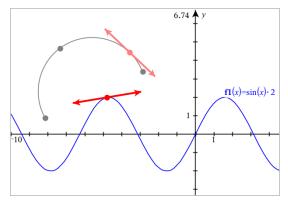


4. To move a tangent, drag it. It remains attached to the object or graph.

Creating a Vector

1. From the Points and Lines menu, select Vector. (In the Graphs application, click **Geometry > Points and Lines > Vector.)**

- 2. Click a location to establish the vector's initial point.
- 3. Click a second location to specify direction and magnitude and complete the vector.




4. To move a vector, drag any point other than the endpoints. To manipulate the magnitude and/or direction, drag either end point.

Note: If you create an endpoint on an axis or another object, you can move the endpoint only along that object.

Creating a Circle Arc

- 1. From the Points and Lines menu, select Circle Arc. (In the Graphs application, click Geometry > Points and Lines > Circle Arc.)
- 2. Click a location or point to establish the starting point of the arc.
- 3. Click a second point to establish an intermediate point through which the arc will pass.
- Click a third point to set the ending point and complete the arc.



5. To move an arc, drag its perimeter. To manipulate it, drag any of its three defining points.


Creating Geometric Shapes

The Shape tools let you explore circles, polygons, conics and other geometric objects.

As you create a shape, a tool appears in the work area (for example, Circle \bigcirc). To cancel the shape, press ESC. To enable automatic labelling of certain objects, see What You Must Know, in this chapter.

Creating a Circle

- 1. From the Shapes menu, select Circle. (In the Graphs application, click Geometry > Shapes > Circle.)
- 2. Click a location or point to position the circle's centre point.
- 3. Click a location or point to establish the radius and complete the circle.




4. To resize a circle, drag its perimeter. To move it, drag its centre point.

Creating a Triangle

Note: To ensure that the total of the angles of a triangle equals 180° or 200 gradians, you can force integer angles in the Geometry view. Refer to What You Must Know, in this chapter.


- 1. From the Shapes menu, select Triangle. (In the Graphs application, click Geometry > Shapes > Triangle.)
- 2. Click three locations to establish the vertices of the triangle.



3. To manipulate a triangle, drag any point. To move it, drag any side.

Creating a Rectangle


- 1. From the Shapes menu, select Rectangle. (In the Graphs application, click Geometry > Shapes > Rectangle.)
- Click a location or point to establish the first corner of the rectangle. 2.
- Click a location for the second corner.
 - One side of the rectangle is displayed.
- 4. Click to establish the distance to the opposite side and complete the rectangle.



5. To rotate a rectangle, drag one of its first two points. To extend it, drag one of the last two points. To move it, drag any side.

Creating a Polygon

- 1. From the Shapes menu, select Polygon. (In the Graphs application, click Geometry > Shapes > Polygon.)
- 2. Click a location or point to establish the first vertex of the polygon.
- Click to establish each additional vertex. 3.
- To complete the polygon, click the first vertex.




5. To manipulate a polygon, drag any vertex. To move it, drag any side.

Creating a Regular Polygon

- From the Shapes menu, select Regular Polygon. (In the Graphs application, click Geometry > Shapes > Regular Polygon.)
- Click once on the work area to establish the centre point.
- Click a second location to establish the first vertex and radius. 3.

A 16-sided regular polygon is formed. The number of sides is displayed in brackets; for example, {16}.


- Drag any vertex in a circular motion to set the number of sides.
 - Drag clockwise to reduce the number of sides.
 - Drag counter-clockwise to add diagonals.



5. To resize or rotate a regular polygon, drag any of its points. To move it, drag any side.

Creating an Ellipse


- 1. From the Shapes menu, select Ellipse. (In the Graphs application, click Geometry > Shapes > Ellipse.)
- 2. Click two locations or points to establish the foci.
- Click to establish a point on the ellipse and complete the shape.



4. To manipulate an ellipse, drag any of its three defining points. To move it, drag its perimeter.

Creating a Parabola (from focus and vertex)


- 1. From the Shapes menu, select Parabola. (In the Graphs application, click Geometry > Shapes > Parabola.)
- Click a location to establish the focus.
- 3. Click a location to establish the vertex and complete the parabola.



4. To manipulate a parabola, drag its focus or its vertex. To move it, drag it from any other point.

Creating a Parabola (from focus and directrix)


- 1. Create a line to serve as the directrix.
- 2. From the Shapes menu, select Parabola. (In the Graphs application, click Geometry > Shapes > Parabola.)
- Click a location to establish the focus.
- 4. Click the line to establish it as the directrix.



5. To manipulate a parabola, rotate or move its directrix or drag its focus. To move it, select both the directrix and the focus, and then drag either object.

Creating a Hyperbola

- 1. From the Shapes menu, select Hyperbola. (In the Graphs application, click Geometry > Shapes > Hyperbola.)
- 2. Click two locations to establish the foci.
- 3. Click a third location to complete the hyperbola.




4. To manipulate a hyperbola, drag any of its three defining points. To move it, drag it from any other place on the shape.

Creating a Conic by Five Points

- 1. From the Shapes menu, select Conic by Five Points. (In the Graphs application, click **Geometry > Shapes > Conic by Five Points.)**
- 2. Click five locations to establish the five points on the shape.

Depending on the pattern of the points, the conic can be a hyperbola or an ellipse.



3. To manipulate a conic, drag any of its five defining points. To move it, drag it from any other place on the shape.

Creating Shapes Using Gestures (MathDraw)

The MathDraw tool lets you use touchscreen or mouse gestures to create points, lines, circles and other shapes.

MathDraw is available in:

- Geometry view without the analytic window displayed.
- Graphing view when the x scale and y scale are identical. This avoids non-circular ellipses and non-square rectangles appearing as circles and squares.

MathDraw is not available in the 3D Graphing view or in the Geometry view with the analytic window displayed.

Activating MathDraw

- If using the Geometry view with the analytic window visible, use the View menu to hide the window.
- 2. On the Actions menu, select MathDraw.

The MathDraw icon 🌠 appears. You can begin using the tool.

Cancelling MathDraw

When you have finished using the MathDraw tool, press Esc.

The tool also closes if you select a different tool or change views.

Creating Points

To create a labelled point, tap or click in an open area.

If the point is close to an existing line, segment, ray, geometric conic (including circles) or polygon, the point snaps to that object. You can also place a point on the intersection of any two of those types of objects.

If the point is close to a visible grid location in a Graphs view or the analytic window of a Geometry view, it snaps to the grid.

Drawing Lines and Segments

To create a line or segment, touch or click the initial position, and then drag to the end position.

- If the drawn line passes near an existing point, the line snaps to the point.
- If the drawn line starts close to an existing point and ends next to another existing point, it becomes a segment defined by those points.
- If the drawn line is nearly parallel or perpendicular to an existing line, segment or side of a polygon, it aligns to that object.

Note: The default tolerance for detecting parallel/perpendicular lines is 12.5 degrees. This tolerance can be redefined using a variable named ti_gg_fd.angle_tol. You can change the tolerance in the current problem by setting this variable in the calculator app to a value in the range 0 through 45 (0=no parallel/perpendicular detection).

Drawing Circles and Ellipses

To create a circle or ellipse, use the touchscreen or mouse to draw the approximate shape.

- If the drawn shape is sufficiently circular, a circle is created.
- If the shape is elongated, an ellipse is created.
- If the virtual centre of the drawn shape is near an existing point, the circle or ellipse is centred on that point.

Drawing Triangles

To create a triangle, draw a triangle-like shape.

If a drawn vertex is close to an existing point, the vertex snaps to the point.

Drawing Rectangles and Squares

To create a rectangle or square, use the touchscreen or mouse to draw the perimeter.

- If the drawn shape is nearly square, a square is created.
- If the drawn shape is elongated, a rectangle is created.

If the centre of a square is close to an existing point, the square snaps to that point.

Drawing Polygons

To create a polygon, tap or click a succession of existing points, ending on the first point you tapped.

Using MathDraw to Create Equations

In the Graphs view, MathDraw attempts to recognise certain gestures as functions for analytic parabolas.

Note: The default step value for quantisation of the parabola coefficients is 1/32. The denominator of this fraction can be redefined using a variable named ti gg fd.par quant. You can change the step value in the current problem by setting this variable to a value greater or equal to 2. A value of 2, for example, produces a step value of 0.5.

Using MathDraw to Measure an Angle

To measure the angle between two existing lines, use the touchscreen or mouse to draw a circle arc from one of the lines to the other.

- If the intersection point between the two lines does not exist, it is created and labelled.
- The angle is not a directed angle.

Using MathDraw to Find a Mid-point

To create a point midway between two points, tap or click point 1, point 2, and then point 1 again.

Using MathDraw to Erase

To erase objects, use the touchscreen or mouse to drag left and right, similar to the motion of erasing a whiteboard.

- The erasure area is the bounding rectangle of the erasure gesture.
- All point objects and their dependents inside the erasure area are removed.

Basics of Working with Objects

Selecting and Deselecting Objects

You can select an individual object or multiple objects. Select multiple objects when you want to quickly move, colour, or delete them together.

1. Click an object or graph to select it.

The object flashes to indicate selection.

- Click any additional objects to add them to the selection.
- Perform the operation (such as moving or setting colour).
- 4. To deselect all objects, click an empty space in the work area.

Grouping and Ungrouping Geometric Objects

Grouping objects gives you a way to reselect them as a set, even after you have deselected them to work with other objects.

1. Click each object to add it to the current selection.

The selected objects flash.

- Display a context menu of the selected object or objects.
- 3. Click Group. You can now select all the items in the group by clicking any of its members.
- 4. To split a group into individual objects, display a context menu of any of its member objects, and click Ungroup.

Deleting Objects

- Display the context menu of the object or objects.
- Click Delete. 2.

You cannot delete the origin, the axes, or points representing locked variables, even if those items are included in the selection.

Moving Objects

You can move an object, group, or combination of selected objects and groups.

Note: If an immovable object (such as the graph axes or a point with locked coordinates) is included in a selection or group, you cannot move any of the objects. You must cancel the selection and then select only movable items.

To move this	Drag this
A multiple-object selection or group	Any of its objects
A point	The point
A segment or vector	Any point other than an endpoint
A line or ray	The identifying point
A circle	The centre point
Other geometric shapes	Any position on the object except one of its defining points. For example, move a polygon by dragging any of its sides.

Constraining Object Movement

Holding down the SHIFT key before dragging lets you constrain how certain objects are drawn, moved, or manipulated.

Use the constraint feature to:

- Rescale only a single axis in the Graphs application.
- Pan the work area horizontally or vertically, depending on which direction you drag initially.
- Limit object movement to horizontal or vertical.
- Limit point placement to 15° increments as you draw a triangle, rectangle, or polygon.
- Limit angle manipulations to 15° increments.
- Limit the radius of a resized circle to integer values.

Pinning Objects

Pinning objects prevents accidental changes as you move or manipulate other objects.

You can pin graphed functions, geometric objects, text objects, the graph axes, and the background.

- 1. Select the object or objects to pin, or click an empty area if you are pinning the background.
- 2. Display the context menu, and select Pin.

A pinned object displays a pin icon $m{7}$ when you point to it.

3. To unpin an object, display its context menu, and select **Unpin**.

Notes:

- Although you cannot drag a pinned point, you can reposition it by editing its x and y coordinates.
- You cannot pan the work area while the background is pinned.

Changing the Line or Fill Colour of an Object

Colour changes made in the software are displayed in shades of grey when you work on documents using a TI-Nspire™ CX handheld that does not support colour. Colour is preserved when you move documents back to the software.

- 1. Select the object or objects.
- Display the object's context menu, click **Colour**, and then click **Line Colour** or Fill Colour.
- 3. Select the colour to apply to the objects.

Changing the Appearance of an Object

- From the Actions menu, select Attributes.
- 2. Click the object that you want to change. You can change shapes, lines, graphs, or graph axes.

The list of the attributes for the selected object are displayed.


- 3. Press ▲ and ▼ to move through the list of attributes.
- select Thick, Thin, or Medium for the Line Weight attribute.
- Press **Enter** to apply the changes.

6. Press **ESC** to close the Attributes tool.

Labelling Points, Geometric Lines, and Shapes

- Display the context menu of the object. 1.
- 2. Click Label.
- Type the text of the label, and then press **Enter**.

The label attaches itself to the object and follows the object as you move it. The label's colour matches the object's colour.

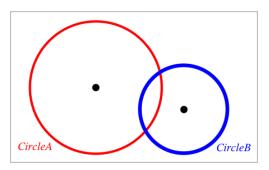


Measuring Objects

Measurement values update automatically as you manipulate the measured object.

Note: Measurements of objects created in the Graphs application are displayed in generic units named u. Measurements of objects created in the Geometry application are displayed in centimetres (cm).


Measuring Length of a Segment, Circle Arc or Vector

- 1. From the Measurement menu, select Length. (In the Graphs application, click Geometry > Measurement > Length.)
- 2. Click the object to display its length.

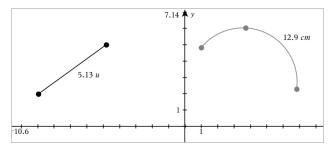

Measuring Distance Between Two Points, a Point and a Line, or a Point and a Circle


- From the Measurement menu, select Length. (In the Graphs application, click Geometry > Measurement > Length.)
- 2. Click the first point.
- 3. Click the second point or a point on the line or circle.

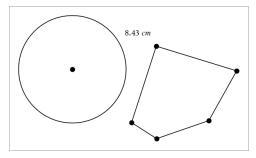

In this example, length is measured from the centre of the circle to the upper left vertex of the polygon.

Measuring Circumference of a Circle or Ellipse or the Perimeter of a Polygon, **Rectangle or Triangle**


- 1. From the Measurement menu, select Length. (In the Graphs application, click Geometry > Measurement > Length.)
- 2. Click the object to display its circumference or perimeter.

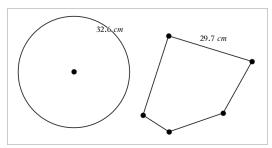

Measuring a Side of a Triangle, Rectangle or Polygon

- 1. From the Measurement menu, select Length. (In the Graphs application, click Geometry > Measurement > Length.)
- 2. Click two points on the object that form the side you want to measure.


Note: You must click two points to measure a side. Clicking the side measures the entire length of the object's perimeter.



Measuring Area of a Circle, Ellipse, Polygon, Rectangle or Triangle


Note: You cannot measure the area of a polygon constructed using the Segment tool.

- 1. From the Measurement menu, select Area. (In the Graphs application, click Geometry > Measurement > Area.)
- 2. Click the object to display its area.

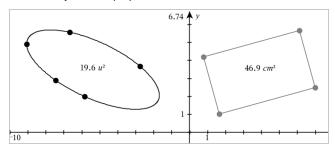

Measuring Slope of a Line, Ray, Segment or Vector

- 1. From the Measurement menu, select Slope. (In the Graphs application, click Geometry > Measurement > Slope.)
- 2. Click the object to display its slope.




The value is updated automatically when you manipulate the object.

Measuring Angles


Measured angles in the Geometry application range from 0° to 180°. Measured angles in the Graphs application range from 0 radians to π radians. To change the angle unit, use the Settings menu.

- 1. From the Measurement menu, select Angle. (In the Graphs application, click Geometry > Measurement > Angle.)
- 2. Click three locations or points to define the angle. The second click defines the vertex.

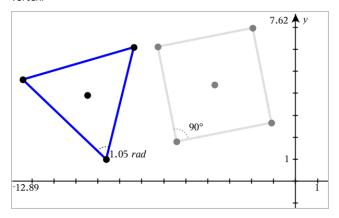


Measuring Angles using the Directed Angle Tool

- 1. From the Measurement menu, select Directed Angle. (In the Graphs application, click Geometry > Measurement > Directed Angle.)
- 2. Click three locations or existing points to define the angle. The second click defines the vertex.



3. To reverse the measurement orientation,

- a) On the Actions menu, select Attributes.
- b) Click the angle text. For example, click 300°.
- Select the orientation attribute, and use the right or left arrow key to change it.
- d) Press Esc to close the Attributes tool.



Moving a Measured Value

Drag the measurement to the desired location.

Note: If you move a measurement too far from its object, it stops following the object. However, its value continues to be updated as you manipulate the object.

Editing a Measured Length

You can set the length of a side of a Triangle, Rectangle or Polygon by editing its measured value.

Double-click the measurement, and then enter the new value.

Storing a Measured Value as a Variable

Use this method to create a variable and assign a measured value to it.

- Display the item's context menu, and select **Store**.
- 2. Type a variable name for the stored measurement.

Linking a Measured Length to an Existing Variable

Use this method to assign a measured length value to an existing variable.

- 1. Display the measurement's context menu, and select Variables > Link to.
 - The menu shows the list of currently defined variables.
- 2. Click the name of the variable you want to link to.

Deleting a Measurement

Display the measurement's context menu, and select **Delete**.

Locking or Unlocking a Measurement

- 1. Display the measurement's context menu, and select Attributes.
- 2. Use the up/down arrow keys to highlight the Lock attribute.
- 3. Use the left/right arrow keys to close or open the lock.

As long as the value remains locked, manipulations are not allowed that would require the measurement to change.


Transforming Objects

You can apply transformations to drawn objects in both the Graphs and Geometry applications. If the object's points are labelled, the corresponding points in the transformed object are labelled using prime notation ($A \rightarrow A'$). To enable automatic labelling of certain objects, see What You Must Know in this chapter.

Exploring Symmetry

- 1. From the Transformation menu, select Symmetry. (In the Graphs application, click Geometry > Transformation > Symmetry.)
- Click the object whose symmetry you want to explore.
- 3. Click a location or existing point to establish the point of symmetry.

A symmetrical image of the object is displayed.




4. Manipulate the original object or the point of symmetry to explore the symmetry.

Exploring Reflection

1. Create a line or segment to predefine the line about which the object will be reflected.

- 2. From the Transformation menu, select Reflection. (In the Graphs application, click Geometry > Transformation > Reflection.)
- Click the object whose reflection you want to explore.
- Click the predefined reflection line or segment.

A reflected image of the object is displayed.



Manipulate the original object or the line of symmetry to explore the reflection.


Exploring Translation

- (Optional) Create a vector to predefine the distance and direction of translation.
- From the Transformation menu, select Translation. (In the Graphs application, click Geometry > Transformation > Translation.)
- Click the object whose translation you want to explore.
- 4. Click the predefined vector.

-or-

Click two locations on the work area to indicate the direction and distance of translation.

A translated image of the object is displayed.



Manipulate the original object or the vector to explore the translation. 5.


Exploring Rotation

- (Optional) Create an angle measurement to serve as a predefined angle of rotation.
- 2. From the Transformation menu, select Rotation. (In the Graphs application, click Geometry > Transformation > Rotation.)
- Click the object whose rotation you want to explore. 3.
- Click a location or point to define the point of rotation.
- 5. Click the points of the predefined angle.

-or-

Click three locations to define an angle of rotation.

A rotated image of the object is displayed.



Manipulate the original object or the point of rotation to explore the rotation.


Exploring Dilation

Create a Text object containing a numeric value to serve as a predefined dilation factor.

Note: You can also use a measured length value as the dilation factor. Keep in mind that if you use a large value, you may have to pan the display to view the dilated object.

- 2. From the Transformation menu, select Dilation. (In the Graphs application, click Geometry > Transformation > Dilation.)
- Click the object whose dilation you want to explore.
- 4. Click a location or existing point to define the centre point of dilation.
- Click the Text object or measurement that defines the dilation factor.

A dilated image of the object is displayed.

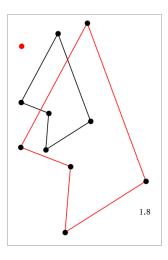

6. Manipulate the original object or the centre point of dilation to explore the dilation. You can also edit the dilation factor.

Exploring with Geometric Construction Tools


You can investigate scenarios by adding objects from the Construction tools. The constructions are dynamic. The midpoint of a line segment, for example, is updated automatically when you manipulate the endpoints.

While a construction is in progress, a tool appears in the work area (for example, Parallel (27). To cancel, press ESC.

Creating a Midpoint

This tool lets you bisect a segment or define a midpoint between any two points. The points can be on a single object, on separate objects, or on the work area.


- 1. From the Construction menu, select Midpoint. (In the Graphs application, click Geometry > Construction > Midpoint.)
- 2. Click a point or location to define the first point.
- 3. Click a second point or location to complete the midpoint.



Creating a Parallel Line

This tool creates a parallel line with respect to any existing line. The existing line can be a Graphs axis or any side of a triangle, square, rectangle, or polygon.

- 1. From the Construction menu, select Parallel. (In the Graphs application, click Geometry > Construction > Parallel.)
- 2. Click the object that will serve as the reference line.
- 3. Click a location to create the parallel line.




You can drag the parallel line to move it. If you manipulate the reference object, the line remains parallel.

Creating a Perpendicular Line

You can create a line that is perpendicular to a reference line. The reference can be an axis, an existing line, a segment, or one side of a triangle, rectangle, or polygon.

- 1. From the Construction menu, select Perpendicular. (In the Graphs application, click **Geometry > Construction > Perpendicular.**)
- 2. Click a location or existing point through which the perpendicular line should pass.
- 3. Click the item that will serve as the reference line.

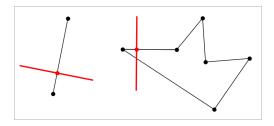

You can drag the intersection point to move the perpendicular. If you manipulate the reference object, the line remains perpendicular.


Creating a Perpendicular Bisector

You can create a perpendicular bisector on a segment, on one side of a triangle, rectangle, or polygon, or between any two points.

- From the Construction menu, select Perpendicular Bisector. (In the Graphs application, click Geometry > Construction > Perpendicular Bisector.)
- 2. Click the item that will serve as the reference line.

-or-


Click two points to create a perpendicular bisector between them.

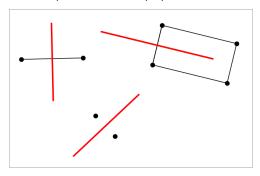

Bisecting an Angle

This tool creates an angle bisector. The points of the angle can be on existing objects, or they can be locations on the work area.

- From the Construction menu, select Angle Bisector. (In the Graphs application, click Geometry > Construction > Angle Bisector.)
- 2. Click three locations or points to define the angle. The second click defines the vertex of the angle.

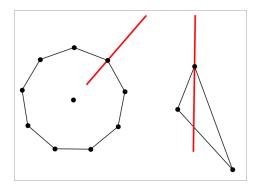


The angle bisector adjusts automatically as you manipulate its defining points.


Creating a Locus

The Locus tool enables you to explore the range of motion of one object with respect to another object as constrained by a shared point.

- 1. Create a segment, line, or circle.
- 2. Create a point on the segment, line, or circle.




3. Create another object that uses the point created in the previous step.



Circle created to use the defined point on the segment.

- 4. From the Construction menu, select Locus. (In the Graphs application, click Geometry > Construction > Locus.)
- 5. Click the point shared by the objects.
- 6. Click the object defined to share the point (this is the object to vary).

The continuous locus is displayed.



Creating a Compass

This tool operates similarly to a geometric compass used for drawing circles on paper.

- 1. From the Construction menu, select Compass. (In the Graphs application, click Geometry > Construction > Compass.)
- 2. To set the width (radius) of the compass:

Click a segment.


-or-

Click any side of a triangle, rectangle, polygon, or regular polygon.

-or-

Click any two existing points or locations on the work area.

3. Click a location to establish the centre of the circle and complete the construction.

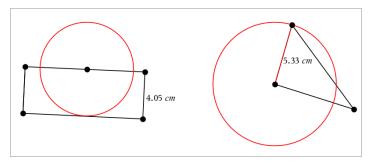

The radius adjusts automatically as you manipulate the original segment, side, or points used to define the radius.

Using Geometry Trace


The Geometry Trace tool leaves a visible trail of a geometric object or function graph as it is moved or manipulated. The movement can be done manually or by using animation. This tool is accessible in both the Graphs and Geometry applications.

1. From the Trace menu, select Geometry Trace.

The Geometry Trace tool appears.

- 2. Click the object or function that you want to trace to select it.
- 3. Drag the object, or play the animation.

This example shows traces of a graphed function manipulated by dragging and a triangle manipulated by animation.

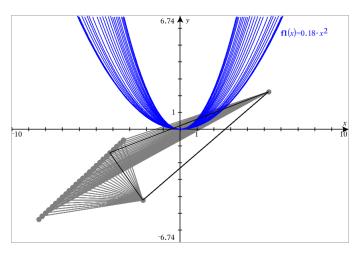

Note: You cannot select or manipulate the trace trail.

- 4. To erase all trails, select **Erase Geometry Trace** from the **Trace** menu.
- 5. To stop tracing, press **Esc**.

Conditional Attributes

You can cause objects to hide, show, and change colour dynamically, based on specified conditions such as "r1<r2" or "sin(a1)>=cos(a2)."

For example, you might want to hide an object based on a changing measurement that you have assigned to a variable, or you might want an object's colour to change based on a "Calculate" result assigned to a variable.

Conditional behaviours can be assigned to objects or groups in the Graphing, Plane Geometry, and 3D Graphing views.


Setting Conditional Attributes of an Object

You can set conditions of a selected object either by using its context menu or by activating the Set Conditions tool from the Actions menu and then selecting the object. These instructions describe using the context menu.

- Select the object or group.
- 2. Display the object's context menu, and click Conditions.

The conditional attributes are displayed.





For 2D objects


For 3D objects

3. (Optional) In the Show When field, enter an expression specifying the conditions during which the object will be shown. Anytime the condition is not satisfied, the object will be hidden.

You can specify tolerance by using compound conditionals in the Show When input field. For example, area>=4 and area<=6.

Note: If you need to see conditionally hidden objects temporarily, click Actions > Hide/Show. To return to normal viewing, press ESC.

4. (Optional) Enter numbers or expressions that evaluate to numbers in the applicable colour fields, such as Line Colour or Mesh Colour. To see a map of colour values, click the Coors button.

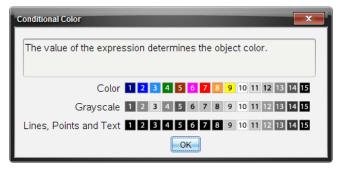

Map of conditional colour values


5. Click **OK** in the Conditional Attributes dialogue box to apply the conditions.

Hiding Objects in the Geometry Application


The Hide/Show tool reveals objects you have previously selected as hidden and lets you select which objects to show or hide.

From the Actions menu, select Hide/Show.

The Hide/Show tool appears, and currently hidden items (if any) are shown dimmed.




2. Click objects to toggle their hide/show status.



3. Press Esc to complete your selections and close the tool.

All objects you selected as hidden objects disappear.



4. To view the hidden objects temporarily or restore them as shown objects, open the Hide/Show tool.

Customizing the Geometry Work Area

Inserting a Background Image


You can insert an image as a background for any Graphs or Geometry page.

- 1. From the Insert menu. click Image.
- 2. Navigate to the image you want to insert, select it, and then click Open.

Adding a Text Object to the Work Area

Use the Text tool to add numeric values, formulas, observations, or other explanatory information to the Geometry work area.

- 1. From the Actions menu, select Text.
- 2. Click the location for the text.
- 3. Type the text in the box that appears, and then press **Enter**.



To move a text object, drag it. To edit the text, double-click it. To delete a text object, display its context menu, and select Delete.

Changing the Attributes of Numeric Text

If you enter a numeric value as text, you can lock it or set its format and displayed precision.

- From the Actions menu, select Attributes.
- 2. Click the numeric text to display its list of attributes.
- 3. Press ▲ and ▼ to move through the list.
- 4. At each attribute icon, press ✓ or ▶ to move through the options. For example, select **0** through **9** as the precision.
- Press Enter to apply the changes.
- 6. Press Esc to close the Attributes tool.

Animating Points on Objects

You can animate any point created as a point on an object or graph. Multiple points can be animated simultaneously.

Animating a Point

- From the Actions menu, select Attributes.
- 2. Click the point to display its attributes.
- Press ▼ to select the animation attributes.
- 4. Press ◀ or ▶ to choose either unidirectional or alternating animation.
- 5. Type a value to set the animation speed. Any nonzero speed begins the animation. To reverse the direction, enter a negative value.
- 6. Press Enter to display the animation controls .
- 7. Press **ESC** to close the Attributes tool.

Pausing and Resuming All Animations

- To pause all animations on a page, click Pause | | |.
- To resume all animations, click Play .

Resetting All Animations

Resetting pauses all animations and returns all animated points to the positions they occupied when they were first animated.

To reset animation, click **Reset** .


Changing or Stopping the Animation of a Point

- From the Actions menu, select Attributes. 2.
- Click the point to display its attributes.
- 4. Select the animation attribute, and type a new animation speed. To stop the point's animation, enter zero.

Note: If other animated points exist, the animation controls remain in the work area.

Adjusting Variable Values with a Slider

A slider control lets you interactively adjust or animate the value of a numeric variable. You can insert sliders in the Graphs, Geometry, Notes and Data & Statistics applications.

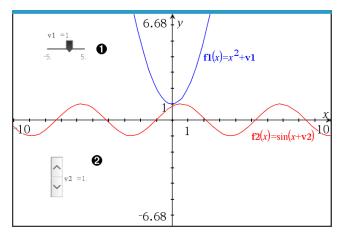

- lacktriangle Horizontal slider for adjusting variable v1.
- **2** Minimised vertical slider for adjusting variable v2.

Note: TI-Nspire™ version 4.2 or higher is required for opening .tns files containing sliders on Notes pages.

Inserting a Slider Manually

From a Graphs, Geometry or Data & Statistics page, select Actions > Insert Slider. -or-


From a Notes page, make sure the cursor is not in a maths box or chem box, and then select Insert > Insert Slider.

The Slider Settings screen opens.



2. Enter the desired values, and click OK.

The slider is displayed. On a Graphs, Geometry or Data & Statistics page, handles are displayed to let you move or stretch the slider.




To remove the handles and use the slider, click an empty space in the work area. You can show the handles any time by selecting Move from the slider's context menu.

- 3. To adjust the variable, slide the pointer (or click the arrows on a minimised slider).
 - You can use the **Tab** key to move the focus to a slider or to move from one slider to the next. The colour of the slider changes to show you when it has the
 - When a slider has the focus, you can use the arrow keys to change the value of the variable.

Working with the Slider

Use the options on the context menu to move or delete the slider, and to start or stop its animation. You can also change the slider's settings.


Display the slider's context menu.



2. Click an option to select it.

Automatic Sliders in Graphs

Sliders can be created for you automatically in the Graphs application and in the analytic window of the Geometry application. You are offered automatic sliders when you define certain functions, equations or sequences that refer to undefined variables.

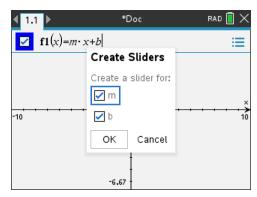


Using the Calculate Tool

The Calculate tool is available in the Graphs and Geometry applications. It lets you evaluate a maths expression you have entered as a text object.

The following example uses the Calculate tool to calculate the measured angles of a triangle.


1. Using the **Shapes** menu, create a triangle and then measure its angles.

Tip: You can enable options to automatically label points and to force geometric triangle angles to integers. For more information, see What You Must Know, in this chapter.



- 2. From the Actions menu, click Text.
- 3. Click a location for the text, and type the formula for the calculation.

In this example, the formula calculates three terms.




- 4. From the Actions menu, click Calculate.
- 5. Click the formula you created.

You are prompted to select a value for each term in the formula.

6. Click each angle measurement when prompted.

Note: If you have stored a measurement as a variable, you can select it when prompted by clicking
. If the name of a stored measurement matches a term in the formula, you can press "L" when prompted for that term.

After you have selected the third term, the calculation result attaches itself to the pointer.



7. Position the result, and press **Enter** to anchor it as a new text object.

Lists & Spreadsheet Application

The Lists & Spreadsheet application gives you a place to work with tabular data. It lets you:

- Store numeric data, text or maths expressions.
- Define a table cell in terms of the contents of other cells.
- Define an entire column based on the contents of another column.
- Share columns of data as list variables with other TI-Nspire™ applications. Also share individual cells as variables.
- Work with variables created in the Graphs & Geometry and Calculator applications.
- Collect tables of real-world data from sensors.
- Generate columns of data-based sequences that you define.
- Plot table data using the Data & Statistics application.
- Generate a table of values for a function.
- Copy and paste table data from the Lists & Spreadsheet application to other computer applications, such as TI Connect™ software and Excel® spreadsheet software.
- Perform statistical analysis on lists of data.

Adding a Lists & Spreadsheet Page

To start a new document with a blank Lists & Spreadsheet page:


From the main File menu, click New Document and then click Lists & Spreadsheet.

Handheld: Press file on, and select Lists & Spreadsheet III.

To add a Lists & Spreadsheet page in the current problem of an existing document:

From the toolbar, click Insert > Lists & Spreadsheet.

Handheld: Press doc → and select Insert >Lists & Spreadsheet.

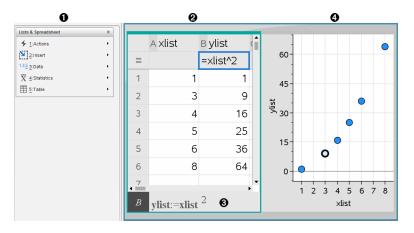

- Lists & Spreadsheet tools (available when a Lists & Spreadsheet work area is a active)
- Sample Lists & Spreadsheet work area മ
- Lists & Spreadsheet entry line ഒ
- Lists & Spreadsheet data plotted in the Data & Statistics application

Creating and Sharing Spreadsheet Data as Lists

You can define a column as a named list of elements of the same type of data. After defining a list, you can link to it from the Graphs & Geometry, Calculator or Data & Statistics applications, and from other instances of the Lists & Spreadsheet application within the current problem.

Note: Lists & Spreadsheet can display a maximum of 2500 elements in a list.

Sharing a Spreadsheet Column as a List Variable

You share a column of data by naming it as a list variable.

Note: Avoid defining variables that use the same names as those used for statistical analysis. In some cases, an error condition could occur.

Variable names used for statistical analysis are listed in the TI-Nspire™ Reference Guide, under the stat.results entry.

Click the cell to move to the column's name cell (the top cell of the column).

-or-

Press **A** as necessary.

2. Type a name for the list variable, and press **Enter**.

The column is now available as a list variable to other TI-Nspire[™] applications.

3. Create elements in the list the same as you would create data in spreadsheet cells. For example, you can type the data into each cell or use a formula to generate a column of data.

Notes:

- If a variable with the name you specified already exists in the current problem, Lists & Spreadsheet displays an error message.
- When you select the column formula cell of a list, it displays the list name in an expression similar to width:=.
- Lists can contain empty elements (denoted by " ").
- You can refer to a specific element in a named list from the Calculator application. Use the list name and the element's position within the list. In a list named Heights, for example, refer to the first element as Heights[1]. The expression Heights[2] refers to the second element, and so on.

Linking to an Existing List Variable

Linking a column to an existing list variable lets you easily view and edit the values in the list. The list can be any shared list in the current problem and can be defined in Graphs & Geometry, Calculator or any instance of Lists & Spreadsheet.

After you link a column to a list, Lists & Spreadsheet automatically shows any changes that you make to the list with other TI-Nspire™ applications.

- 1. Click the column formula cell (the second cell from the top) of the column that you want to link to the variable.
- 2. Type the name of the list variable you want to link to.

-or-

Click on the toolbar (press var on the handheld), click Link To and click the variable you want to link to.

Press Enter.

The column shows the list elements.

Notes:

You cannot link to the same variable multiple times on the same page.

Use caution if you link to a system variable. Doing so could prevent the variable from being updated by the system. System variables include ans and statistics results (such as stat.results, stat.RegEqn and stat.Resid).

Inserting an Element in a List

When you insert an element in a list, the remaining elements shift downward to create space. No other columns are affected.

Click Insert > Insert Cell.

Deleting an Element from a List

When you delete an element, the remaining list elements shift upward to close the gap. The upward shift affects only the selected column.

- 1. Click the cell of the element to delete.
- 2. Open the context menu for the cell, and click **Delete Cell**.

Note: If you press Del or Backspace to clear the contents of the cell instead of deleting the list element, the element is assigned a value of 0 (zero). The remaining list elements do not shift.

Creating Spreadsheet Data

You can type numeric values, text or formulas into body cells. Column formula cells can contain formulas only. (For more information, see Generating Columns of Data.)

Data Examples

Entry	Remarks
1.234	Simple numeric entry
"Green"	Text - Enclose categorical data (such as the names of colours used in a study) within quotes to distinguish them from variable names. Handheld: Press [x] x to enter quoted data.
=a3*length	Formula - Consists of an "=" symbol followed by an expression. You can type the expression or use the Catalogue and expression templates to build it. For more information, see the Calculator section. To ensure a decimal result instead of a fraction, type one of the integers in the expression as a decimal. For example, type 1.0 instead of 1.

Typing a Maths Expression, Text or Spreadsheet Formula

1. Double-click the cell to select it and put it in edit mode.

Note: If the cell is already selected, you can press **Enter** or click the entry line.

2. Type the expression, text or formula. Be sure to enclose text entries in quotes and start formula entries with an "=" symbol.

As you type the data, it appears in the cell and on the entry line simultaneously.

3. Press Enter to complete the entry and move down to the next cell.

-or-

Press **Tab** to complete the entry and move right to the next cell.

The Lists & Spreadsheet application automatically recalculates any cells that are dependent on the cell you entered. If you have shared the cell, and other TI-Nspire[™] applications are linked to the cell, the other applications are also updated.

Note: Empty cells in a spreadsheet display as a void represented by an underscore (). The underscore is automatically added to empty cells when a list is named or when an empty cell is referenced in a formula. When you plan to perform calculations on a range of cells, be sure to notice the location of void cells. Cells without a value can affect calculations. For example, if you include a void cell in the range for a sum such as "=b2+c2," the result of the calculation is void ().


Inserting a Cell Range into a Formula

The Select Range feature lets you insert a cell range (such as a1:b3) into a formula by selecting the range instead of typing cell addresses into an argument.

Suppose you want to calculate the mean of a range of cells.

- 1. Select the cell that will contain the result.
- From the Data menu, click List Maths > Mean.


An editable formula appears in the cell.

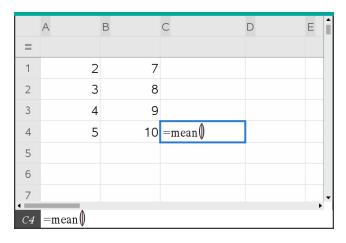

- Click Actions > Select > Select Formula Range.
- Drag a selection rectangle around the range of values for which you want to 4. calculate the mean.

Handheld: Move to the first cell in the range, hold [4shift], and press the arrow keys.


The formula is updated as you select the cells.

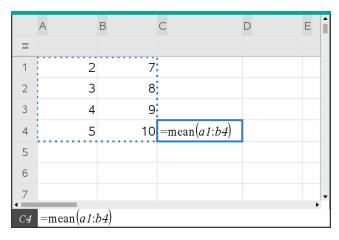

5. Press Enter to complete the formula and display the result.

Navigating in a Spreadsheet

A spreadsheet includes a column letter at the top of each column and a row number on the left of each row. The top two rows and the row numbers remain in place as you scroll. You can name a column of data to make it available as a list variable in TI-Nspire[™] applications.

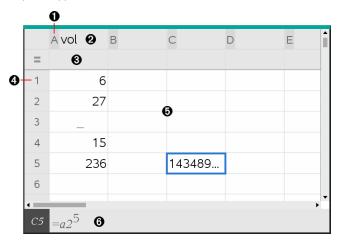

- Column reference letter
- Column name cell for defining a column as a list variable
- Column formula cell for generating a column of data
- Row reference number
- Body Cells Any empty (void) element in a list is displayed as an underscore (""). Any value that cannot fit in a cell's width is truncated (143489...). Hover over the cell to display the complete value.
- 6 Entry line (includes cell reference for current cell)

You can select any cell to view or edit its contents. When a spreadsheet is larger than the Lists & Spreadsheet work area, you can move to different parts of the spreadsheet by using the Tab key and by pressing short-cut keys.

- Press Tab to move between the body of the spreadsheet (data zone) and the column names and formulas (naming zone).
- Press \blacktriangleleft , \triangleright , \blacktriangle and \blacktriangledown to move through the spreadsheet one cell at a time (move between cells within a zone). The arrow keys move the cursor from cell to cell and scroll as necessary to keep the selected cell in view.
- Move across several cells at a time by pressing Page up, Page Dn, Home and End.

Handheld: Press ctri 9 (Page up), ctri 3 (Page Dn), ctri 7 (Home) and ctri 1 (End) keys.

- Use the Go To command on the Actions menu to select a specific cell. Type the cell's column letter and row number (such as G16).
- Press Enter to put the selected cell in Edit mode.
- Drag the scroll bar to move vertically without changing the cell or block of cells selected.

Working with Cells

Working with Colour

The Lists & Spreadsheet application displays black text and cells with a white background by default. You can change the colour of cells and text to emphasize or distinguish data. The colours and the order in which colour is assigned is based on the TI-Nspire™ colour palette.

Changing the Fill Colour of Cells

- 1. Select the cells to fill with colour. You can choose one or more cells in any adjacent cells, columns or rows.
- 2. Access the context menu and click Colour > Fill Colour.
- 3. Click the colour to apply to the cells.

Note: If you combine colour text and colour cells, choose colours carefully to ensure visibility as you work with documents in the software and on the handheld.

Changing the Colour of Text

- 1. Select the cells that contain the text to change. You can choose one or more cells in any adjacent cells, columns or rows.
- 2. Access the context menu and click Colour > Text Colour.
- 3. Click the colour to apply to the text. Empty cells in the selection area show the colour change when text is added.

Understanding Cell References in Formulas

Use a cell reference to use data from a cell or range of cells in a formula. The calculation results update automatically when values in cells change.

Relative references include only the cell's column letter and row number (for example, E7). A relative reference describes where a cell is in relation to other cells of the spreadsheet. The Lists & Spreadsheet application keeps track of relative cell references and adjusts the reference automatically when surrounding cells shift (because of actions you perform, such as column deletions or cell insertions).

Follow these guidelines to specify cell references:

- Include a column letter and row number in a relative reference.
- Include the \$ symbol before both the column letter and the row number to specify an absolute reference.
- Include a colon (:) between a two cell reference to specify a range of cells.

Absolute references include the \$ symbol before the column letter and before the row number (for example, \$B\$16). Absolute references always refer to the cell in a specific position in the spreadsheet. The application does not automatically adjust the cell reference when cell positions change.

Typing a Cell Reference in a Formula

- 1. Double-click the cell and type the formula. For more information, see the Calculator section.
- 2. Move to the appropriate position in the formula and type the cell reference. Use the format for a relative reference (B3), absolute reference (\$B\$2) or range of cells (A1:A4).

Note: You can click Recalculate on the Actions menu to update all references and formula results in a spreadsheet.

Deleting the Contents of Cells

1.	Click a cell to select it.

Use the arrow keys to move to the cell.

Note: If you are deleting a range of cells, select a cell at one end or corner of the range, and then use Shift with the arrow keys to select the remaining cells in the range.

Press Del.

-or-

Note: Any cell that uses a formula with an absolute reference to deleted data shows an error. A cell that uses a formula with a relative reference to deleted data is updated to use the data currently in the referenced position.

Copying Cells

When you copy cells, any formulas in the original cells are copied to the destination cells.

1. Click the cell to copy.

-or-

Use the arrow keys to move to the cell.

Note: If you are copying a range of cells, select a cell at one end or corner of the range, and then use **Shift** with the arrow keys to select the remaining cells in the range.

2. Use the standard key short-cut for copying a selection.

Windows®: Press Ctrl+C.

Mac®: Press #+C.

Handheld: Press ctrl C.

- Click the cell where you want to duplicate the copied cell. If you are copying a block of data, click the cell that will become the upper left corner of the copied block.
- 4. Paste the selected cells:

Windows®: Press Ctrl+V.

Mac®: Press #+v.

Handheld: Press ctrl V.

Important: Paste copied data into a cell that is in the same mode as the cell from which the data was originally copied. Otherwise, a formula could paste as a string enclosed in quotes instead of a formula.

Filling Adjacent Cells

You can repeat a cell's formula or value throughout adjacent cells within the row or column. You can also repeat a range of cells horizontally or vertically. If you fill from a

range that contains a simple sequence (such as 2, 4, 6), the sequence continues in the filled cells.

1. Click the cell that contains the value or formula to repeat.

Note: If you are repeating a range of cells, drag to select the range, or select a cell at one end of the range, and then use Shift with the arrow keys to select the remaining cells.

- 2. Click Data > Fill.
- 3. Use the arrow keys, or drag to select the range that will hold the repetitions.
- Press Enter.

The value, formula or pattern that you selected for duplication is repeated over the selected range.

Sharing a Cell Value as a Variable

You can share the value of a cell with other TI-Nspire[™] applications by storing it as a variable. When you define or refer to a shared cell or variable in Lists & Spreadsheet, the name is preceded with an apostrophe (').

- 1. Click the cell that you want to share.
- 2. Click on the toolbar, and click **Store Var** to store the cell's value.

Handheld: Press ctrl var or press var and select Store Var).

A formula is inserted into the cell with var as a placeholder for a variable name.

3. Type over the letters "var" with a name for the variable, and press Enter. Use a variable name that does not exist in the current problem.

The value is shown in bold to indicate that it is now available as a variable to other TI-Nspire[™] applications.

Linking a Cell to a Variable

When you link a cell to a variable, Lists & Spreadsheet keeps the cell value updated to reflect the current value of the variable. The variable can be any variable in the current problem and can be defined in Graphs & Geometry, Calculator, Data & Statistics or any instance of Lists & Spreadsheet.

- 1. Click the cell that you want to link to a variable.
- 2. Click on the toolbar, and click **Link to**.

Handheld: Press ctrl var or press var and select Link to.

The VarLink menu opens.

- Under Link To, press ▲, and ▼ to scroll to the name of the variable.
- 4. Press Enter.

The cell shows the value of the variable.

Note: Use caution if you link to a system variable. Linking could prevent the variable from being updated by the system. System variables include statistics results (such as Stat.RegEqn, Stat.dfError and Stat.Resid) and finance-solver variables (such as tvm.n, tvm.pmt and tvm.fv).

Working with Rows and Columns of Data

Selecting a row or column

To select a column, move to the top of the column and click the column reference letter. To select a row, move to the leftmost cell of the row and click the row reference number. Press Esc to cancel the selection.

Handheld: Hold down ▲ to move past the top cell, or hold down ◀ to move past the leftmost cell.

To extend a selection to adjacent rows or columns, hold down **Shift** and press < **▶**, **▲** or **▼**.

Resizing a Row or Column

- Click the row or column that you want to resize.
- 2. From the Actions menu, select Resize and then select an option.
- 3. Choose a resizing option for a column or row.
 - For a column, choose Resize Column Width, Maximize Column Width or Minimise Column Width.
 - For a row, you can choose Resize Row Height.

The tools that minimise and maximise the column width work automatically. You must manually adjust the size to use the Resize Column Width and Resize Row Height tools.

4. To resize manually, use ◀ and ▶ to resize the column, or use ▲ and ▼ to resize the row, and then press Enter.

Inserting an Empty Row or Column

- Click a column or row where you want to insert the new data.
- 2. From the Insert menu, select either Row or Column.
 - If you are inserting a row, the remaining rows shift down to create space for the new row.
 - If you are inserting a column, the remaining columns shift right to create

Note: If other cells contain formulas with relative references to a displaced row or column, those references adjust accordingly.

Deleting Entire Rows or Columns

You can delete a row, column, group of rows or group of columns. When you delete a row or column, the remaining rows or columns move up or left to fill the gap.

- Click the column or row that you want to delete.
- 2. (Optional) To select adjacent rows or columns to delete, hold down Shift and press \blacktriangleleft , \blacktriangleright , \blacktriangle or \blacktriangledown .
- 3. Display the context menu.
 - Windows®: Right-click the selected row.
 - Mac[®]: Hold the \mathcal{H} key, and click the selected row.
 - Handheld: Press ctrl menu.
- 4. On the context menu, select Delete Row.

The selected rows or columns are deleted.

Note: If other cells contain formulas that refer to the deleted row or column, those cells show an error. Relative references to cells whose positions have changed because of a deletion adjust accordingly.

Copying Rows or Columns

- 1. Click the row number to copy a row, or click the column letter to copy a column.
- 2. (Optional) To select adjacent rows or columns to copy, hold down Shift and press **◄**, ▶, ▲ or ▼.
- 3. Copy the row or column:

Windows®: Press Ctrl+C.

Mac®: Press **X+C**.

Handheld: Press ctrl C.

- 4. Move to any cell in the row or column where you want to place the copied items.
- 5. Paste the row or column:

Windows®: Press Ctrl+V.

Mac[®]: Press **ℋ+V**.

Handheld: Press ctrl **V**.

The copied row or column is pasted in place, replacing the previous contents.

Note: If you copy a named column, it is pasted with the name removed to prevent a variable conflict.

Moving a Column

- 1. Click the column that you want to move.
- 2. From the Actions menu, select Move Column.

An insertion bar appears.

Note: Relative references to any cell in a position is affected by the move adjust accordingly.

Displaying Results as Exact or Approximate

You can choose to display a column's calculated results in Exact (fraction) or Approximate (decimal) form. This affects only the values calculated from a formula.

1. Select the column by clicking the reference letter at the top of the column.

Handheld: Hold down ▲ to move past the top cell.

- 2. Display the context menu for the column.
- 3. On the context menu, click either Data > Exact or Data > Approximate.

Note: To restore the column results to the document's default setting, select the column and click **Data > Restore Document Setting**.

Clearing Column Data

The Clear Data command lets you remove the data from selected columns. Clear Data does not delete the column, and it does not clear a column's name or formula.

After clearing the data, Lists & Spreadsheet recalculates column formulas for the selected columns. This makes Clear Data useful for capturing a fresh set of data from another application or selectively generating a fresh column of random numbers.

- Click the column or columns that you want to clear.
- 2. From the Data menu, select Clear Data.


Note: If a recalculated formula produces the same data as before, it may appear that the Clear Data command has failed.

Sorting Data

You can sort a selected area of the spreadsheet in ascending or descending order. You select which column in the selected area will be used as the key for the sort. When the sort moves data up or down in the key column, the corresponding data in the other selected columns is also moved up or down. This preserves the integrity of each row.

Note: Sorting is based on numeric values. If you select a key column that contains text, you could get unexpected results.


Select the range of cells.



2. From the **Actions** menu, select **Sort**.

The **Sort** dialogue box opens.

- Click the column letter to use for ordering.
- 4. Click **Descending** or **Ascending** as the sort method, and then click **OK**.




Note: Sorting a column that is defined by a formula will remove the formula, because it may not be valid after the sort.

Generating Columns of Data

You can create a column of values based on the contents of another column. You can also create a column based on any of several types of sequential data.

Entering a formula in a column's formula cell tells the Lists & Spreadsheet application that you want to apply the formula to all cells in the column, not just to a single cell.

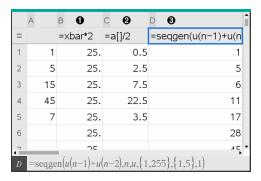

- Column formula based on a variable
- Column formula based on another column (column A)
- Column formula that generates a sequence


Notes:

- If you generate data in a column that already contains one or more cell values, Lists & Spreadsheet asks for confirmation before replacing the existing values. Proceeding removes all of the existing values in the column.
- If you edit a cell manually in a column of generated data, Lists & Spreadsheet asks for confirmation before replacing the generated data. Proceeding removes the generated data for the entire column.

Creating Column Values Based on Another Column

- 1. Click the column formula cell (the second cell from the top) of the column where you want to use a formula.
 - Lists & Spreadsheet inserts the leading equal sign (=) for the formula. If the column is a named list, Lists & Spreadsheet inserts listname:= followed by the cursor.
- 2. Type the expression for the formula after the = and press Enter Use brackets ([]) after any column letter you include in the formula. For example, type $=a[]^2$ to create a column of values in which each cell is the square of the corresponding cell of column A.

Lists & Spreadsheet shows the formula in the formula cell and fills the column with the results.

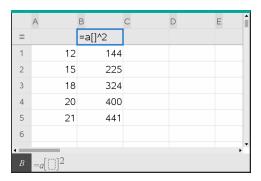


Generating a Column of Random Numbers

This example generates a column of 20 random integers in the range 1 to 6.

- 1. Click the column formula cell (the second cell from the top) of the column.
 - Lists & Spreadsheet inserts the leading equal sign (=) for the formula. If the column is a named list, Lists & Spreadsheet inserts listname:= followed by the cursor.
- After the equal sign, type RandInt (1,6,20).

Note: You can also use the Catalogue or click Data > Random > Integer to insert the RandInt() function.

3. Press Enter to generate the numbers.

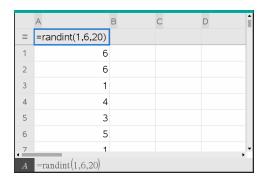

4. Generate (Recalculate) a new set of random numbers:

Windows®: Press Ctrl+R.


Mac®: Press **X+R**.

Handheld: Press ctrl R.

Generating a Numerical Sequence

- 1. Click any cell in the column in which you want to generate the sequence.
- 2. From the Data menu, select Generate Sequence.


The Sequence dialogue box opens.



- 3. Type the Formula that will be applied to the column values.
- 4. Type any **Initial Terms** required by the sequence. Separate them with commas.
- 5. Type a starting value for the independent variable (n0).
- 6. Type a maximum number of values to be generated (nMax).
- 7. Type the step value (nStep).

- 8. (Optional) Type a maximum value for the sequence in the Ceiling Value field.
- 9. Click OK.

Lists & Spreadsheet shows the formula in the formula cell and fills the column with the results.

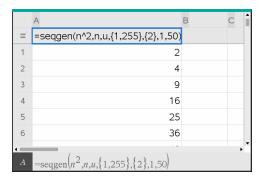

Graphing Spreadsheet Data


You can graph the data in a spreadsheet using Quick Graph or Summary Plot. Lists & Spreadsheet cells that contain no data are not represented by data points on graphs.

Using Quick Graph


You can easily create a dot plot of the data in one column or a scatter plot of two adjacent columns by using the Quick Graph feature. This feature displays the graphed data using the Data & Statistics application.

To create a scatter plot:

Name both of the columns to declare them as lists.




2. Select both columns.




3. From the Data menu, select Quick Graph.

A Data & Statistics application is added to the page with the plotted data. The leftmost of the two lists is plotted on the x axis, and the other list is plotted on the y axis.

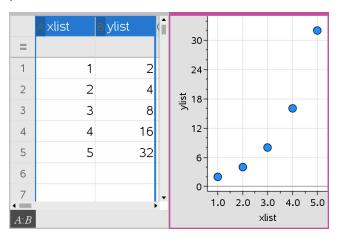


4. (Optional) Use the Data & Statistics features to analyse or visually enhance the graph.


Note: For more information, see Using Data and Statistics.

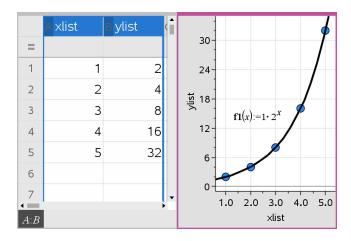

Creating a Summary Plot from a Summary Table

In this example, you create a summary table from raw data, and then use the table to generate a summary plot. For more information, see Using Data & Statistics.





raw data

summary table for eye colour based on raw data


A summary table contains an X (or Y) List and a Summary List.

- The X (or Y) List contains numeric or string values (such as 1999 or "colour"). Numeric values result in a histogram. String values identify the categories for a bar chart.
- The Summary List contains numeric values (such as count, frequency, or probability) for each element in the other list.


To Create a Summary Plot:

Note: For situations in which you already have a summary table, you can skip the first two steps.

1. Create a list that holds the category identifiers. For this example, name the list "colour" and type strings for eye colour. Enclose category names in quotes to prevent them from being interpreted as variables.




Create the summary list. For this example, name the list "counts" and type the total count for each of the eye colours.



- Select either list by clicking the top cell of the column and pressing ▲.
- From the Data menu, select Summary Plot.


The Summary Plot dialogue box opens.



- 5. If necessary, use Tab and the arrow keys to select the correct lists for X List and Summary List.
- In the Display On field, select how to display the summary plot in the Data & Statistics application.
 - Select Split Page to place the chart on half of the current page.

Select **New Page** to add the chart on a new page.

The summary plot is displayed with the list names along the axes and a summary plot symbol in the lower left corner of the chart window.

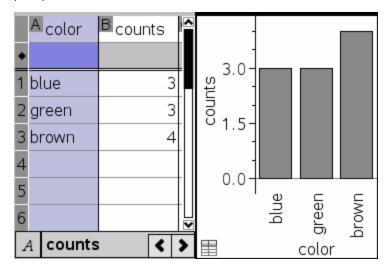

Note: In this example, the X List contains string data, so the summary plot displays as a bar chart. The category strings from the list display beneath the bars.

Exchanging Data with Other Computer Software

You can use the TI-Nspire™ desktop software to copy table data to and from software outside the TI-Nspire[™] applications, such as TI DataEditor (in the TI Connect[™] software) and Excel® spreadsheet software.

For example, you can copy:

- The values of individual cells, a range of cells or an entire list from TI DataEditor.
- The values (not the underlying formulas) of individual cells, a range of cells or an entire column from an Excel® spreadsheet.
- A number from TI DataEditor.
- The value of a matrix from TI DataEditor.

Example - Copying Data from TI DataEditor

- Open the TI Connect™ software.
- 2. Display the TI DataEditor.

3. If necessary, open the file containing the number, list or matrix that you want to copy.

	L ₆
1	1.5567
2	2.2256
3	3.987
4	7.5326
5	13.33
6	


4. Drag to select the values that you want to copy. To copy an entire list, click the top cell in the list.

	L ₆
1	1.5567
2	2.2256
3	3.987
4	7.5326
5	13.33
6	

- 5. Click Edit > Copy.
- 6. In Lists & Spreadsheet, click the cell where you want the data to be pasted.

If you have copied a range of cells, they will be pasted so that the upper-left corner of the range is positioned at the selected cell. Any data in those cells will be overwritten.

7. Click Edit > Paste.

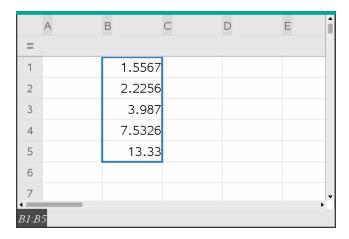

Copying Cells from an Excel® Spreadsheet

You can copy up to 26 columns and 2500 rows from an Excel® spreadsheet to a Lists & Spreadsheet application.

1. Drag to select the values that you want to copy from the Excel® spreadsheet. To copy an entire column, click the column identifier at the top of the column.

Note: If you select non-contiguous columns in the Excel® spreadsheet, they will be pasted as contiguous columns in Lists & Spreadsheet.

2. Use the standard key short-cut for copying a selection.

Windows®: Press Ctrl+C.

Mac®: Press #+C.

3. In Lists & Spreadsheet, click the cells where you want the data to be pasted.

If you are copying a range of cells, they will be pasted so that the upper-left corner of the range is positioned at the selected cell. Any data in those cells in will be overwritten.

4. Paste the data.

Windows®: Press Ctrl+V.

Mac®: Press **光+V**.

Handheld: Press ctrl **V**.

Note: Categorical data must be enclosed in quotes (" ") after the data is pasted.

Capturing Data from Graphs & Geometry

You can use Lists & Spreadsheet application to capture information about objects in the Graphs & Geometry application. For example, you could track changes in the area of a triangle as you change the length of a side in the Graphs & Geometry application.

Captured values replace values in the column. If you prefer, you can remove all data from a column before starting a new capture by clicking Clear Data on the Data menu.


Capturing Data Manually

- 1. Make sure the data value that you want to capture is linked to a variable name.
- 2. Click the column formula cell (the second cell from the top) of the column in which you want to capture the values.

Note: Captured values replace values in the column.

3. Click Data > Data Capture > Manual.

A capture expression is inserted into the column formula cell with var as a placeholder for the name of the variable you are capturing.

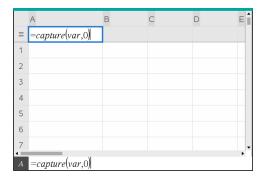

4. Replace the letters "var" with the name of the variable to capture from Graphs & Geometry. For example, type area.

The formula cell now contains an expression similar to =capture (area, 0).



Note: The argument "0" tells Lists & Spreadsheet that you want to trigger each capture manually.

5. Press Enter.

- 6. From the Graphs & Geometry application, change the object with a measured value stored as the variable (area, in this example) referenced in the data capture expression.
- 7. Each time you are ready to capture the current value of area, press the capture keys.

Windows®: Press Ctrl+. (the full stop key).

 Mac° : Hold down \mathcal{H} and press. (the full stop key).

Handheld: Press ctrl .

The current area value is added to the end of the list as a list element.

Capturing Data Automatically


When you capture data automatically, you can specify that you want the captures to be triggered by:

- Changes in the captured variable only.
- Changes in the captured variable or additional variables.

This lets you set up multiple columns of synchronised captures, such as the x and y coordinates of a moving object.

- 1. Clear all columns that you will be using for the captured data.
- 2. Make sure any data values that you want to capture are linked to variable names.
- 3. Click the column formula cell (the second cell from the top) of the column in which you want to capture the values.
- 4. Click Data > Data Capture > Automatic.

A capture expression is inserted into the column formula cell with var as a placeholder for the name of the variable you are capturing.

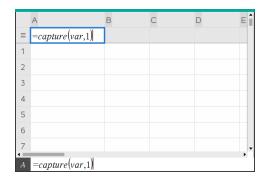

Replace the letters "var" with the name of the variable to capture. For example, type objpathX. Alternatively, you can select the variable name from the Variables menu.

The formula cell now contains an expression similar to =capture (objpathX,1).



Note: The argument "1" tells Lists & Spreadsheet that you want the captures to be triggered by the variable change.

If you want the capture to also be triggered by changes in an additional variable or variables, type a comma after the 1, and then type the variable name or the name of a list that itemises the variables.

The formula cell will contain an expression similar to =capture (objpathX,1,objpathY).


- 7. Press Enter to complete the formula.
- If you are capturing multiple columns of synchronised data, set up the additional columns. For example, you might set up a second capture variable using =capture(objpathY,1,objpathX).
- 9. When you are ready to capture the values, begin moving the object or start the animation that affects it in Graphs & Geometry.

Each captured value is added to the end of the list.


Synchronising Captured Data for a Point

To ensure that both coordinate values for a point are captured even if only one coordinate changes, you can add {'a,'b} in the third argument of the capture expression.


1. In a Graphs & Geometry application, create a point with variables (a,b).

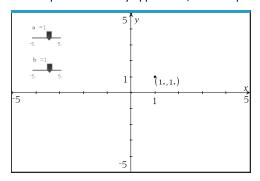

- 2. Add a Lists & Spreadsheets application to the problem.
- Enter the capture expressions for both variables.

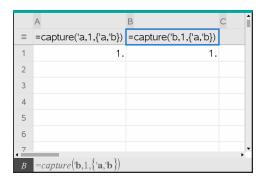


Move the slider for variable a.

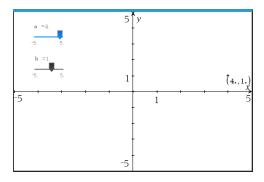


The data captured for **b** synchronises accordingly.

	А	В	C 1
=	=capture('a,1,{'a,'b})	=capture('b,1,{'a,'b})	
1	1.	1.	
2	2.	1.	
3	3.	1.	
4	4.	1.	
5	4.	2.	
6	4.	3.	
7			, .
B1:B	4		

Move the slider for variable **b**.

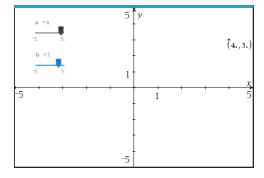

The data captured for a synchronises accordingly.

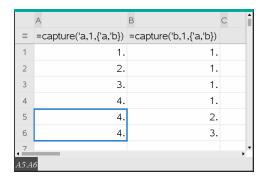


Using Table Data for Statistical Analysis

Tools on the Statistics menu provide access to wizards that help you perform statistical analyses on the data in table columns. You specify the location of the data, and Lists & Spreadsheet stores the results in two columns: one for the result names, and one for the corresponding values.

Plotting Statistical Data

Some statistics wizards include a **Draw** box. By default, the box is not selected. Selecting this box creates a Data & Statistics work area on the page, displays the calculated results in Lists & Spreadsheet, and draws the results of the statistical analysis in the Data & Statistics work area.

Note: For functions that support the Draw option, the option is available only if you type the function in a column formula cell.



Draw box (as shown in the z Test wizard).

Statistics Input Descriptions

The following table describes the different inputs used in Lists & Spreadsheet wizards.

Input	Description
μ_0	Hypothesized value of the population mean that you are testing.
σ	The known population standard deviation; must be a real number > 0.
List	The name of the list containing the data you are testing.
Frequency List	The name of the list containing the frequency values for the data in List . Default=1. All elements must be integers \geq 0. The frequency values can also be typed as a list, in the format $\{1, 1, 3, 2\}$.
$\overline{\mathbf{x}}$, Sx, n	Summary statistics (mean, standard deviation and sample size) for the one-sample tests and intervals.
σ1	The known population standard deviation from the first population for the two-sample tests and intervals. Must be a real number > 0.
σ2	The known population standard deviation from the second population for the two-sample tests and intervals. Must be a real number > 0.
List 1, List 2	The names of the lists containing the data you are testing for the two-sample tests and intervals.
Frequency 1, Frequency 2	The names of the lists containing the frequencies for the data in List 1 and List 2 for the two-sample tests and intervals. Defaults=1. All elements must be integers ≥ 0.
\overline{X} 1, Sx1, n1, \overline{X} 2, Sx2, n2	Summary statistics (mean, standard deviation, and sample size) for sample one and sample two in two-sample tests and intervals.
Pooled	Specifies whether variances are to be pooled for 2-Sample t Test and 2-Sample t Interval.
p ₀	The expected sample proportion for 1-Prop z Test . Must be a real number, such that $0 < p_0 < 1$.
х	The count of successes in the sample for the 1-Prop z Test and 1-Prop z Interval. Must be an integer ≥ 0 .
n	The count of observations in the sample for the 1-Prop z Test and 1-Prop z Interval . Must be an integer > 0.

Input	Description
x1	The count of successes from sample one for the 2-Prop z Test and 2-Prop z Interval . Must be an integer ≥ 0 .
x2	The count of successes from sample two for the 2-Prop z Test and 2-Prop z Interval . Must be an integer ≥ 0 .
n1	The count of observations in sample one for the 2-Prop z Test and 2-Prop z Interval . Must be an integer > 0.
n2	The count of observations in sample two for the 2-Prop z Test and 2-Prop z Interval . Must be an integer > 0.
C-Level	The confidence level for the interval instructions. Must be ≥ 0 and < 100. If it is ≥ 1 , it is assumed to be given as a percent and is divided by 100. Default=0.95.
RegEQ	The prompt for the name of the function where the calculated regression equation is to be stored.

Statistical Calculations


Performing a Statistical Calculation

You can perform statistical calculations to analyse data. The following example fits a y=mx+b linear regression model to the two lists in columns A and B.

1. From the Statistics menu, select Stat Calculation > LinearRegression (mx+b) to choose the regression model.


The Linear Regression (mx+b) dialogue box opens.

- 2. Type a[] as the column for the X List.
- 3. Type b[] as the column for the Y List.
- 4. To store the regression equation in a specified variable, replace Save RegEqn To with the name of the variable.
- 5. Type c[] as the column for the 1st Result.



6. Click OK.

Lists & Spreadsheet inserts two columns: one containing the names of the results, and one containing the corresponding values.

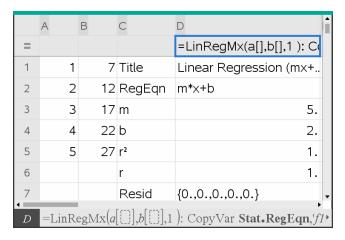

Note: The results are linked to the source data. For example, if you change a value in column A, the regression equation is updated automatically.

Storing Statistical Results

Lists & Spreadsheet stores statistical results using a variable-group name with the format stat.*nnn*, where *nnn* is the result name (for example, stat.RegEqn and stat.Resid). The use of standard names for variables makes it easier to identify and use

the statistical variables later. If you want to use a custom variable group instead of the standard name, you can edit the formula in the column formula cell.

You could use the following formula to store the results in the variable group MystatsB.

Later, you could view the results by entering the following expression in the Calculator application or in another column of the Lists & Spreadsheet application:

Supported Statistical Calculations

The Stat Calculations menu lets you select from the calculations described below. For more information, see the TI-Nspire™ Reference Guide.

One-Variable Statistics (OneVar)

Analyses data with one measured variable. You can specify an optional frequency list. The statistical data returned using this analysis technique are:

- Sample mean, \overline{x}
- Sum of the data, Σx
- Sum of the squared data, Σx^2
- Sample standard deviation, sx
- Population standard deviation, σx
- Sample size, n
- X-min
- First quartile, Q₁
- Median
- Third quartile, Q₃
- X-max
- Sum of squared deviations, $SSx = \Sigma(x \overline{x})^2$

Two-Variable Statistics (TwoVar)

Analyses paired data. List I is the independent variable. List 2 is the dependent variable. You can specify an optional frequency list. The statistical data returned using this analysis technique are:

For each list:

- Sample mean, \overline{x} or \overline{y}
- Sum of the data, Σx or Σy
- Sum of the squared data, Σx^2 or Σv^2
- Sample standard deviation, $sx = s_{n-1}x$ or $sy = s_{n-1}y$
- Population standard deviation, $\sigma x = \sigma_n x$ or $\sigma y = \sigma_n y$
- X-min or Y-min
- First quartile, Q₁X or Q₁Y
- Median
- Third quartile, Q₃X or Q₃Y
- X-max or Y-max
- Sum of squared deviations, $SSx = \Sigma(x \overline{x})^2$ or $SSy = \Sigma(y \overline{y})^2$

Additional data:

- Sample size for each data set, n
- $\sum xy$
- Correlation coefficient, R.

Linear Regression (mx+b) (LinRegMx)

Fits the model equation y=ax+b to the data using a least-squares fit. It displays values for m (slope) and b (y-intercept).

Linear Regression (a+bx) (LinRegBx)

Fits the model equation y=a+bx to the data using a least-squares fit. It displays values for a (y-intercept), b (slope), r^2 , and r.

Median-Median Line (MedMed)

Fits the model equation y=mx+b to the data using the median-median line (resistant line) technique, calculating the summary points x1, y1, x2, y2, x3 and y3. Median-Median Line displays values for m (slope) and b (y-intercept).

Quadratic Regression (QuadReg)

Fits the second-degree polynomial $y=ax^2+bx+c$ to the data. It displays values for **a**, **b**, **c**, and R². For three data points, the equation is a polynomial fit; for four or more, it is a polynomial regression. At least three data points are required.

Cubic Regression (CubicReg)

Fits the third-degree polynomial $y=ax^3+bx^2+cx+d$ to the data. It displays values for a, b, c, d, and R². For four points, the equation is a polynomial fit; for five or more, it is a polynomial regression. At least four points are required.

Quartic Regression (QuartReg)

Fits the fourth-degree polynomial $y=ax^4+bx^3+cx^2+dx+e$ to the data. It displays values for a, b, c, d, e and R². For five points, the equation is a polynomial fit; for six or more, it is a polynomial regression. At least five points are required.

Power Regression (PowerReg)

Fits the model equation y=axb to the data using a least-squares fit on transformed values ln(x) and ln(y). It displays values for **a**, **b**, r^2 and **r**.

Exponential Regression (ExpReg)

Fits the model equation y=ab^x to the data using a least-squares fit on transformed values x and ln(y). It displays values for a, b, r^2 and r.

Logarithmic Regression (LogReg)

Fits the model equation y=a+b ln(x) to the data using a least-squares fit on transformed values ln(x) and y. It displays values for a, b, r^2 and r.

Sinusoidal Regression (SinReg)

Fits the model equation y=a sin(bx+c)+d to the data using an iterative least-squares fit. It displays values for a, b, c and d. At least four data points are required. At least two data points per cycle are required to avoid aliased frequency estimates.

Note: The output of SinReg is always in radians, regardless of the Radian/Degree mode setting.

Logistic Regression (d=0) (Logistic)

Fits the model equation y=c/(1+a*e-bx) to the data using an iterative least-squares fit. It displays values for a, b and c.

Logistic Regression ($d\neq 0$) (LogisticD)

Fits the model equation $y=c(1+a*e^{(-bx)})+d$ to the data using an iterative least-squares fit. It displays values for a, b, c and d.

Multiple Linear Regression (MultReg)

Calculates multiple linear regression of list Y on lists X1, X2, ..., X10.

Distributions

Calculating a Distribution

Example: Calculate a distribution to fit the Normal Pdf distribution model.

- 1. Click the column formula cell (second cell from the top) in column A.
- 2. Click Statistics > Distributions > Normal Pdf to choose the Distribution model.


The Normal Pdf dialogue box opens and displays fields for typing or selecting the arguments for the calculation.

- 3. Press Tab as necessary to move from field to field and provide each argument. You can type values, or select them from the drop-down list:
 - X Value: Click the drop-down arrow to choose any list in the problem to provide the x values for the calculation.
 - Mean: Type a value for the mean or click the drop-down arrow to choose a variable that contains the mean.
 - Standard Deviation: Type a value for the standard deviation or choose a variable that contains the standard deviation.
- Click the **Draw** tick box to see the distribution plotted in Data & Statistics.

Note: The Draw option is not available for all distributions.

5. Click OK.

Lists & Spreadsheet inserts two columns: one containing the names of the results, and one containing the corresponding values. The results are plotted in Data & Statistics.

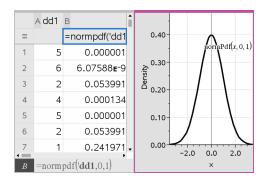

Note: The results are linked to the source data. For example, you can change a value in Column A, and the equation updates automatically.

Supported Distribution Functions

The following distributions are available from the Lists & Spreadsheet application. For more information regarding these functions, see the *TI-Nspire™ Reference Guide*.

- To return a single distribution result based on a single value, type the function in a single cell.
- To return a list of distribution results based on a list of values, type the function in
 a column formula cell. In this case, you specify a list (column) that contains the
 values. For each value in the list, the distribution returns a corresponding result.

Note: For distribution functions that support the draw option (**normPdf**, **t Pdf**, χ^2 **Pdf**, and **F Pdf**), the option is available only if you type the distribution function in a formula cell.

Normal Pdf (normPdf)

Computes the probability density function (**Pdf**) for the normal distribution at a specified x value. The defaults are mean μ =0 and standard deviation σ =1. The probability density function (Pdf) is:

$$f(x) = \frac{1}{\sqrt{2\pi\sigma}} e^{-\frac{(x-\mu)^2}{2\sigma^2}}, \sigma > 0$$

This distribution is used to determine the probability of the occurrence of a certain value in a normal distribution. The draw option is available when Normal Pdf is invoked from a formula cell.

When you access distributions from the formula cell, you must select a valid list from the drop-down list to avoid unexpected results. If accessed from a cell, you must specify a number for the x-value. The distribution returns the probability that the value you specify will occur.

Normal Cdf (normCdf)

Computes the normal distribution probability between Lower Bound and Upper Bound for the specified mean, μ (default=0) and the standard deviation, σ (default=1). You can click the Draw (Shade area) box to shade the area between the lower and upper bounds. Changes to the initial Lower Bound and Upper Bound automatically update the distribution.

This distribution is useful in determining the probability of an occurrence of any value between the lower and upper bounds in the normal distribution. It is equivalent to finding the area under the specified normal curve between the bounds.

Inverse Normal (invNorm)

Computes the inverse cumulative normal distribution function for a given area under the normal distribution curve specified by mean, μ and standard deviation, σ .

This distribution is useful in determining the x-value of data in the area from 0 to x<1 when the percentile is known.

t Pdf (tPdf)

Computes the probability density function (Pdf) for the tdistribution at a specified x value. df (degrees of freedom) must be 0. The probability density function (Pdf) is:

$$f(x) = \frac{\Gamma[(df+1)/2]}{\Gamma(df/2)} \quad \frac{(1+x^2/df)^{-(df+1)/2}}{\sqrt{\pi df}} \label{eq:ff}$$

This distribution is useful in determining the probability of the occurrence of a value when the population standard deviation is not known and the sample size is small. The draw option is available when tPdf is invoked from a formula cell.

t Cdf (tCdf)

Computes the Student-t distribution probability between Lower Bound and Upper Bound for the specified df (degrees of freedom). You can click the **Draw** (Shade area) box to shade the area between the bounds. Changes to the initial Lower Bound and *Upper Bound* automatically update the distribution.

This distribution is useful in determining the probability of the occurrence of a value within an interval defined by the lower and upper bound for a normally distributed population when the population standard deviation is not known.

Inverse t (invt)

Computes the inverse cumulative t-distribution probability function specified by Degrees of Freedom, df, for a given area under the curve.

This distribution is useful in determining the probability of an occurrence of data in the area from 0 to x<1. This function is used when the population mean and/or population standard deviation is not known.

$$\chi^2$$
 Pdf (χ^2 Pdf())

Computes the probability density function (**Pdf**) for the χ^2 (chi-square) distribution at a specified x value. df (degrees of freedom) must be an integer > 0. The probability density function (Pdf) is:

$$f(x) = \frac{1}{\Gamma(df/2)} (1/2)^{df/2} x^{df/2 - 1} e^{-x/2}, x \ge 0$$

This distribution is useful in determining the probability of the occurrence of a given value from a population with a χ^2 distribution. The draw option is available when χ^2 Pdf is invoked from a formula cell.

$$\chi^2$$
 Cdf (χ^2 Cdf())

Computes the χ^2 (chi-square) distribution probability between $\emph{lowBound}$ and $\emph{upBound}$ for the specified df (degrees of freedom). You can click the **Draw Shade area** box to shade the area between the lower and upper bounds. Changes to the initial lowBound and *upBound* automatically update the distribution.

This distribution is useful in determining the probability of the occurrence of value within given boundaries of a population with a χ^2 distribution.

F Pdf (F Pdf())

Computes the probability density function (Pdf) for the F distribution at a specified x value. numerator df (degrees of freedom) and denominator df must be integers > 0. The probability density function (Pdf) is:

$$f(x) = \frac{\Gamma[(n+d)/2]}{\Gamma(n/2)\Gamma(d/2)} \left(\frac{n}{d}\right)^{n/2} x^{n/2-1} (1 + nx/d)^{-(n+d)/2}, x \ge 0$$

where

n = numerator degrees of freedomd = denominator degrees of freedom This distribution is useful in determining the probability that two samples have the same variance. The draw option is available when F Pdf is invoked from a formula cell.

F Cdf (F Cdf())

Computes the F distribution probability between lowBound and upBound for the specified dfnumer (degrees of freedom) and dfDenom. You can click the **Draw (Shade area)** box to shade the area between the lower and upper bounds. Changes to the initial lowBound and upBound automatically update the distribution.

This distribution is useful in determining the probability that a single observation falls within the range between the lower bound and upper bound.

Binomial Pdf (binomPdf())

Computes a probability at x for the discrete binomial distribution with the specified numtrials and probability of success (p) on each trial. The x parameter can be an integer or a list of integers. $0 \le p \le 1$ must be true. numtrials must be an integer > 0. If you do not specify x, a list of probabilities from 0 to numtrials is returned. The probability density function (**Pdf**) is:

$$f(x) = \binom{n}{x} p^{x} (1-p)^{n-x}, x = 0,1,...,n$$

where n = numtrials

This distribution is useful in determining the probability of success in a success/failure trial, at trial *n*. For example, you could use this distribution to predict the probability of getting heads in a coin toss on the fifth toss.

Binomial Cdf (binomCdf())

Computes a cumulative probability for the discrete binomial distribution with n number of trials and probability p of success on each trial.

This distribution is useful in determining the probability of a success on one trial before all trials are completed. For example, if heads is a successful coin toss and you plan to toss the coin 10 times, this distribution would predict the chance of obtaining heads at least once in the 10 tosses.

Inverse Binomial (invBinom())

Given the number of trials (NumTrials) and the probability of success of each trial (Prob), this function returns the minimum number of successes, k, such that the cumulative probability of k successes is greater than or equal to the given cumulative probability (CumulativeProb).

Inverse Binomial with respect to N (invBinomN())

Given the probability of success of each trial (Prob), and the number of successes (NumSuccess), this function returns the minimum number of trials, N, such that the cumulative probability of x successes is less than or equal to the given cumulative probability (*CumulativeProb*).

Poisson Pdf (poissPdf())

Computes a probability at x for the discrete Poisson distribution with the specified mean, μ , which must be a real number > 0. x can be an integer or a list of integers. The probability density function (Pdf) is:

$$f(x) = e^{-\mu} \mu^{x} / x!, x = 0,1,2,...$$

This distribution is useful in determining the probability of obtaining a certain number of successes before a trial begins. For example, you could use this calculation to predict the number of heads that would occur in eight tosses of a coin.

Poisson Cdf (poissCdf())

Computes a cumulative probability for the discrete Poisson distribution with specified mean, \overline{x} .

This distribution is useful in determining the probability that a certain number of successes occur between the upper and lower bounds of a trial. For example, you could use this calculation to predict the number of heads displayed between coin toss No.3 and toss No.8.

Geometric Pdf (geomPdf())

Computes a probability at x, the number of the trial on which the first success occurs, for the discrete geometric distribution with the specified probability of success p. $0 \le p$ \leq 1 must be true. x can be an integer or a list of integers. The probability density function (Pdf) is:

$$f(x) = p(1-p)^{x-1}, x = 1,2,...$$

This distribution is useful in determining the likeliest number of trials before a success is obtained. For example, you could use this calculation to predict the number of coin tosses that would be made before a heads resulted.

Geometric Cdf (geomCdf())

Computes a cumulative geometric probability from lowBound to upBound with the specified probability of success, p.

This distribution is useful in determining the probability associated with the first success occurring during trials 1 through *n*. For example, you could use this calculation to determine the probability that heads display on toss No.1, No.2, No.3, ..., No.n.

Confidence Intervals

Supported Confidence Intervals

The following confidence intervals are available from the Lists & Spreadsheets application. For more information regarding these functions, see the TI-Nspire™ Reference Guide.

z Interval (zinterval)

Computes a confidence interval for an unknown population mean, μ , when the population standard deviation, σ, is known. The computed confidence interval depends on the user-specified confidence level.

This test is useful in determining how far from a population mean a sample mean can get before indicating a significant deviation.

t Interval (tinterval)

Computes a confidence interval for an unknown population mean, μ , when the population standard deviation, σ , is unknown. The computed confidence interval depends on the user-specified confidence level.

This test is useful in examining whether the confidence interval associated with a confidence level contains the value assumed in the hypothesis. Like the z Interval, this test helps you determine how far from a population mean a sample mean can get before indicating a significant deviation when the population mean is unknown.

2-Sample z Interval (zInterval 2Samp)

Computes a confidence interval for the difference between two population means $(\mu_1 - \mu_2)$ when both population standard deviations $(\sigma_1 \text{ and } \sigma_2)$ are known. The computed confidence interval depends on the user-specified confidence level.

This test is useful in determining if there is statistical significance between the means of two samples from the same population. For example, this test could determine whether there is significance between the mean college entrance test score of female students and the mean of college entrance test score of male students at the same school.

2-Sample t Interval (tinterval 2Samp)

Computes a confidence interval for the difference between two population means $(\mu_1 - \mu_2)$ when both population standard deviations $(\sigma_1$ and $\sigma_2)$ are unknown. The computed confidence interval depends on the user-specified confidence level.

This test is useful in determining if there is statistical significance between the means of two samples from the same population. It is used instead of the 2-sample z confidence interval in situations where the population is too large to measure to determine the standard deviation.

1-Prop z Interval (zInterval 1Prop)

Computes a confidence interval for an unknown proportion of successes. It takes as input the count of successes in the sample x and the count of observations in the sample n. The computed confidence interval depends on the user-specified confidence level.

This test is useful in determining the probability of a given number of successes that can be expected for a given number of trials. For instance, casino examiners would use this test to determine if observed payouts for one slot machine demonstrate a consistent pay out rate.

2-Prop z Interval (zInterval 2Prop)

Computes a confidence interval for the difference between the proportion of successes in two populations (p_1-p_2) . It takes as input the count of successes in each sample $(x_1 \text{ and } x_2)$ and the count of observations in each sample $(n_1 \text{ and } n_2)$. The computed confidence interval depends on the user-specified confidence level.

This test is useful in determining if two rates of success differ because of something other than sampling error and standard deviation. For example, a gambler could use this test to determine if there is an advantage in the long run by playing one game or machine versus playing another game or machine.

Linear Reg t Intervals (LinRegtIntervals)

Computes a linear regression t confidence interval for the slope coefficient b. If the confidence interval contains 0, this is insufficient evidence to indicate that the data exhibits a linear relationship.

Multiple Reg Intervals (MultRegIntervals)

Computes multiple regression prediction confidence interval for the calculated y and a confidence for y.

Stat Tests

Supported Statistical Tests

Hypothesis tests are available from the Lists & Spreadsheets application. For more information regarding these functions, see the TI-Nspire™ Reference Guide.

Some of the wizards for Stat Tests display a Draw box. By default, the box is not selected. Selecting the box creates a Data & Statistics work area on the page and plots the results in that work area.

z test (zTest)

Performs a hypothesis test for a single unknown population mean, μ , when the population standard deviation, σ_1 , is known. It tests the null hypothesis H_0 : $\mu = \mu_0$ against one of the alternatives below.

- H_a : $\mu \neq \mu_0$
- H_a : $\mu < \mu_0$

• $H_a: \mu > \mu_0$

This test is used for large populations that are normally distributed. The standard deviation must be known.

This test is useful in determining if the difference between a sample mean and a population mean is statistically significant when you know the true deviation for a population.

t test (tTest)

Performs a hypothesis test for a single unknown population mean, μ , when the population standard deviation, σ , is unknown. It tests the null hypothesis H_0 : $\mu = \mu_0$ against one of the alternatives below.

- H_a: μ≠μ₀
- H_a: μ<μ₀
- H_a: μ>μ₀

This test is similar to a z-test, but is used when the population is small and normally distributed. This test is used more frequently than the z-test because small sample populations are more frequently encountered in statistics than are large populations.

This test is useful in determining if two normally distributed populations have equal means, or when you need to determine if a sample mean differs from a population mean significantly and the population standard deviation is unknown.

2-Sample z Test (zTest_2Samp)

Tests the equality of the means of two populations (μ_1 and μ_2) based on independent samples when both population standard deviations (σ_1 and σ_2) are known. The null hypothesis H₀: μ_1 = μ_2 is tested against one of the alternatives below.

- H_a: μ₁≠μ₂
- $H_a: \mu_1 < \mu_2$
- H_a: μ₁>μ₂

2-Sample t Test (tTest_2Samp)

Tests the equality of the means of two populations (μ_1 and μ_2) based on independent samples when neither population standard deviation (σ_1 or σ_2) is known. The null hypothesis H₀: μ_1 = μ_2 is tested against one of the alternatives below.

- H_a: μ₁≠μ₂
- H_a: μ₁<μ₂
- H_a: μ₁>μ₂

1-Prop z Test (zTest 1Prop)

Computes a test for an unknown proportion of successes (prop). It takes as input the count of successes in the sample x and the count of observations in the sample n. 1-**Prop z Test** tests the null hypothesis H_0 : prop= p_0 against one of the alternatives below.

 H_a : prop $\neq p_0$

 H_a : prop< p_0

 H_a : prop>p₀

This test is useful in determining if the probability of the success seen in a sample is significantly different from the probability of the population or if it is due to sampling error, deviation or other factors.

2-Prop z Test (zTest_2Prop)

Computes a test to compare the proportion of successes (p₁ and p₂) from two populations. It takes as input the count of successes in each sample $(x_1 \text{ and } x_2)$ and the count of observations in each sample $(n_1 \text{ and } n_2)$. **2-Prop z Test** tests the null hypothesis H_0 : $p_1=p_2$ (using the pooled sample proportion \hat{p}) against one of the alternatives below.

 H_a : $p_1 \neq p_2$

 H_a : $p_1 < p_2$

 H_a : $p_1 > p_2$

This test is useful in determining if the probability of success seen in two samples is equal.

χ^2GOF (χ^2GOF)

Performs a test to confirm that sample data is from a population that conforms to a specified distribution. For example, χ^2 GOF can confirm that the sample data came from a normal distribution.

χ^2 2-way Test (χ^2 2way)

Computes a chi-square test for association on the two-way table of counts in the specified Observed matrix. The null hypothesis H₀ for a two-way table is: no association exists between row variables and column variables. The alternative hypothesis is: the variables are related.

2-Sample FTest (FTest 2Samp)

Computes an F-test to compare two normal population standard deviations (σ_1 and σ_2). The population means and standard deviations are all unknown. **2-Sample FTest**, which uses the ratio of sample variances $Sx1^2/Sx2^2$, tests the null hypothesis H_0 : $\sigma_1 = \sigma_2$ against one of the alternatives below.

 H_a : $\sigma_1 \neq \sigma_2$

- H_a : $\sigma_1 < \sigma_2$
- $H_a: \sigma_1 > \sigma_2$

Below is the definition for the **2-Sample FTest**.

SxI, Sx2 = Sample standard deviations having n_1 -1 and n_2 -1 degrees of freedom df, respectively.

F =
$$\frac{Sx1}{Sx2}$$

 $df(x, n_1-1) = Fpdf()$ with degrees of freedom df, n_1-1 , and n_2-1

p = reported p value

2-Sample FTest for the alternative hypothesis $\sigma_1 > \sigma_2$.

$$p = \int_{F}^{a} f(x, n_1 - 1, n_2 - 1) dx$$

2-Sample FTest for the alternative hypothesis $\sigma_1 < \sigma_2$.

$$p = \int_{0}^{F} f(x, n_1 - 1, n_2 - 1) dx$$

2-Sample FTest for the alternative hypothesis $\sigma_1 \neq \sigma_2$. Limits must satisfy the following:

$$\frac{p}{2} = \int_{0}^{L_{bnd}} f(x, n_1 - 1, n_2 - 1) dx = \int_{U_{bnd}}^{\infty} f(x, n_1 - 1, n_2 - 1) dx$$

where: [Lbnd, Ubnd]=lower and upper limits

The F-statistic is used as the bound producing the smallest integral. The remaining bound is selected to achieve the preceding integral's equality relationship.

Linear Reg t Test (LinRegtTest)

Computes a linear regression on the given data and a t test on the value of slope β and the correlation coefficient ρ for the equation $y=\alpha+\beta x$. It tests the null hypothesis H_0 : $\beta=0$ (equivalently, $\rho=0$) against one of the alternatives below.

- H_a : $\beta \neq 0$ and $\rho \neq 0$
- H_a : β <0 and ρ <0
- H_a : β >0 and ρ >0

Multiple Reg Tests (MultRegTest)

Computes a linear regression on the given data, and provides the F test statistic for linearity.

For more information, see the *TI-Nspire™ Reference Guide*.

ANOVA (ANOVA)

Computes a one-way analysis of variance for comparing the means of 2 to 20 populations. The ANOVA procedure for comparing these means involves analysis of the variation in the sample data. The null hypothesis H_0 : $\mu_1 = \mu_2 = ... = \mu_k$ is tested against the alternative H_a : not all $\mu_1...\mu_k$ are equal.

The ANOVA test is a method of determining if there is a significant difference between the groups as compared to the difference occurring within each group.

This test is useful in determining if the variation of data from sample-to-sample shows a statistically significant influence of some factor other than the variation within the data sets themselves. For example, a box buyer for a shipping firm wants to evaluate three different box manufacturers. He obtains sample boxes from all three suppliers. ANOVA can help him determine if the differences between each sample group are significant as compared to the differences within each sample group.

ANOVA 2-Way (ANOVA2way)

Computes a two-way analysis of variance for comparing the means of two to 20 populations. A summary of results is stored in the stat, results variable.

The two-way ANOVA analysis of variance examines the effects of two independent variables and helps to determine if these interact with respect to the dependent variable. (In other words, if the two independent variables do interact, their combined effect can be greater than or less than the impact of either independent variable additively.)

This test is useful in evaluating differences similar to the ANOVA analysis but with the addition of another potential influence. To continue with the ANOVA box example, the two-way ANOVA might examine the influence of box material on the differences seen.

Selecting an Alternative Hypothesis $(\neq < >)$

Most of the inferential stat editors for the hypothesis tests prompt you to select one of three alternative hypotheses.

- The first is a \neq alternative hypothesis, such as $\mu\neq\mu0$ for the z Test.
- The second is a < alternative hypothesis, such as $\mu 1 < \mu 2$ for the **2-Sample t Test**.
- The third is a > alternative hypothesis, such as p1>p2 for the 2-Prop z Test.

To select an alternative hypothesis, move the cursor to the appropriate alternative, and then press **Enter**.

Selecting the Pooled Option

Pooled (2-Sample t Test and **2-Sample t Interval** only) specifies whether the variances are to be pooled for the calculation.

- Select No if you do not want the variances pooled. Population variances can be unequal.
- Select Yes if you want the variances pooled. Population variances are assumed to be equal.

To select the **Pooled** option, select Yes from the drop-down list.

Working with Function Tables

The Lists & Spreadsheet application lets you show a table of function values for any function in the current problem. You can change the settings for the table, delete columns, add values for multiple functions, and edit the expression that defines a function without leaving the Lists & Spreadsheet application.

Switching to a Table

1. While working in the Lists & Spreadsheet application:

Windows®: Press Ctrl+T.

Mac®: Press **X+T**.

Handheld: Press ctrl T.

The Lists & Spreadsheet application disappears and an empty table is displayed with a list of the functions that are available in the problem.

Note: If you have previously shown a table for a function from the Lists & Spreadsheet application, the table includes that function by default.

2. Choose the name of the function for which you want to display values.

Values for the function you selected are displayed in the first column of the table.

- 3. To move through adjacent cells of the table, press ▲ or ▼. Press **Tab** to move from the body of the table (cells) to the top two rows (cells for column names and formulas).
- 4. To hide the table of values and return to the Lists & Spreadsheet application, repeat Step 1.

Making Changes from a Table

You can change the table of function values using the tools on the Table menu.

► To remove a column from the table, click any cell and click **Delete Column**.

To display the list of functions, click a cell in a column and click **Choose**. Select a cell in an empty column unless you are replacing values already displayed. Click a function in the list to add its values to the column.

Note: You can also click the drop-down arrow on the top cell of a column to display the list of functions in the problem.

To change the expression that defines a function, click **Edit Expression**. You can also edit the expression directly on the entry line beneath the table.

Note: When you edit the expression for a function, that function automatically changes in the application used to define the function. For example, if you edit a Graphs & Geometry function in the table, the table values and graph of the function are both updated.

To change the default table settings, choose **Edit Table Settings**.

The Table dialogue box opens. Press **Tab** to move from field to field and type or select new values for the default table settings:

- **Table Start**: Type the value to use as the first value in the table of values.
- **Table Step**: Type a value for the interval between values.
- Independent and Dependent: Click the drop-down arrow to choose Auto or Ask as the method for populating a column with the values of the independent and dependent variables. Auto populates the table starting at the defined table start value and displays an independent and dependent value for each step. Ask lets you select a cell and press Enter to generate a value for a cell.

Data & Statistics Application

The Data & Statistics application provides tools to:

- Visualise sets of data in different types of plots.
- Directly manipulate variables to explore and visualise data relationships. Data changes in one application are dynamically applied to all linked applications.
- Explore central tendency and other statistical summary techniques.
- Fit functions to data.
- Create regression lines for scatter plots.
- Graph hypothesis tests and results (z- and t-tests) based on summary statistics definitions or data.

Adding a Data & Statistics Page


To start a new document with a blank Data & Statistics page:

From the main File menu, click New Document, and then click Add Data & Statistics.

Handheld: Press (값) and select Data & Statistics [네].

To add a Data & Statistics page in the current problem of an existing document: From the toolbar, click Insert > Data & Statistics.

Handheld: Press doc and select Insert > Data & Statistics.

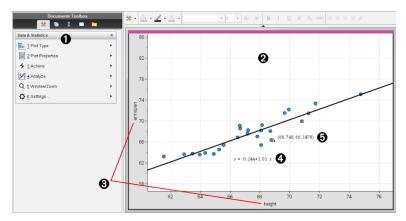

- Data & Statistics menu
- Work area
- Add Variable regions on x-axis and y-axis

- 4 Linear Regression Plot with expression
- Data point with coordinates

Basic Operations in Data & Statistics

The Data & Statistics application lets you explore and visualise data and graph inferential statistics. The Lists & Spreadsheet application can work in conjunction with the Data & Statistics application. The Lists & Spreadsheet Summary Plot and Quick Graph tools automatically add a Data & Statistics application to show plots. A list that you create in a problem (using the Lists & Spreadsheet or Calculator applications) can be accessed as a variable in any TI-Nspire[™] application in that problem.


Changing Data & Statistics Settings

- 1. From the Settings menu, select Settings.
- 2. Select the settings that you want to use.
 - Display Digits. Lets you select the display format for numeric labels in the current document. Select Auto to automatically follow the setting in the Document Settings dialogue box.
 - Diagnostics. Displays the value of the r^2 or R^2 statistic (when available) under certain regression equations.
 - r² is displayed for Linear (mx+b), Linear (a+bx), Power, Exponential and Logarithmic regressions.
 - R² is displayed for Quadratic, Cubic and Quartic regressions.

Using the Default Caseplot

The Data & Statistics application plots numeric and string (categorical) data from variables. When you add a Data & Statistics application to a problem that includes lists, a default caseplot displays on the work area.

The caseplot is like having a stack of cards with information on them and scattering the cards randomly on a table. You can click a dot to see the information on that "card". You can drag a dot to "group" the "cards" by the caption variable.

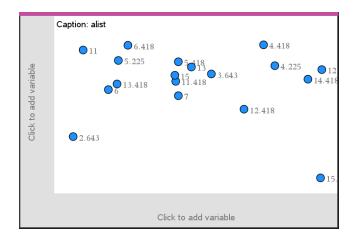

- Click the variable name displayed after **Caption** to use the caseplot.
 - Choose <None> to remove the default caseplot.
 - Choose the name of a variable to have it replace the current caseplot variable.
 - Hover over any data point to see the summary information.
 - Drag any data point toward an axis to see how the points group.
 - Activate the Graph Trace tool and press ◀ or ▶ to move across points.

When you add a variable to either axis, the plot for that variable replaces the default caseplot. The default caseplot redisplays if you remove the plotted variable from each axis.

Using the Context Menu

The context menu provides access to the tools most commonly used with the selected object. The context menu displays different options depending on the active object and the task you are performing.

To open the context menu for an object.

Windows®: Right-click the object.

 Mac° : Hold \mathcal{H} and click the object.

Handheld: Point to the object and press ctrl menu.

The context menu includes the Colour option. You can use the Colour option to change the data to the colour of your choice.

Other options that are appropriate for various plots also appear on the context menu.

Selecting Data and Displaying Summary Information

When you hover over part of a plot, the Data & Statistics application displays summary information for the data it represents.

- 1. Hover at an area of interest in a plot to display data values or summary information. For example, you can hover over the centre of a box plot to display the median summary data.
- 2. Click once to select a representation of data in a plot.

Data points are shown with a bold outline to indicate selection. You can click a point a second time to deselect it, or click additional points to add to the selection.

Plotting Variables

To plot variables, start with a problem that includes a Data & Statistics application and lists created in the Lists & Spreadsheet application or the Calculator application.

1. Click the Add Variable region near the centre of an axis.

If no variable is plotted on the axis, the tooltip Click or Enter to add variable displays.

2. Click the tooltip Click or Enter to add variable.

A list displays the names of available variables.



3. Click the name of the variable to plot.


Note: By convention, the independent variable is shown on the x-axis.

The default plot for one variable is a dot chart. The data points in the default caseplot reposition to represent the elements of the selected variable in a dot chart.

4. (Optional) Click the Add Variable region near the centre of the remaining axis to plot a second variable.

The default plot for two variables is a scatter plot. The data points shift to represent the elements of both variables as a scatter plot.

(Optional) Repeat Steps 1-3 to choose additional variables to plot on the vertical axis.

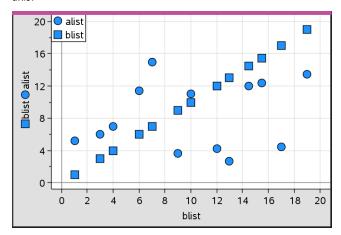

The name of each variable that you add is appended to the label on the axis. The default data point shape changes to help you distinguish data, and a legend is displayed to identify the shapes.

- 6. Change, analyse or explore the plotted data.
 - Remove or change the variable on an axis by clicking the Add Variable region again.
 - View the plotted data in another supported plot type by selecting a tool from the Plot Types menu.
 - Choose the Graph Trace tool on the **Analyse** menu and press ◀ or ▶ to move across the data points in the plot.
 - The lists that you plot as variables can include incomplete or missing cases. (A case is the data contained in a row of cells in the Lists & Spreadsheet application.) The Lists & Spreadsheet application displays a void as an underscore ("_"), and Data & Statistics plots no data point for a void cell.


Manipulating Plotted Data

You can manipulate data points on the Data & Statistics work area to explore their effects. For example, you could explore how a specific group of values affects the median.

You can move a data point only in directions allowed by its definition. If a list is defined with a formula in Lists & Spreadsheet, the points in Data & Statistics may not move because of the formula's restrictions. For example, you can manipulate a plot that represents the result of y=x, but you can only move along a line.

You cannot move points that represent data in a locked variable or data that represents a categorical value.

1. On the Data & Statistics work area, click a representation of data—such as a histogram bin or a whisker of a box plot—that is not locked or restricted by a formula.

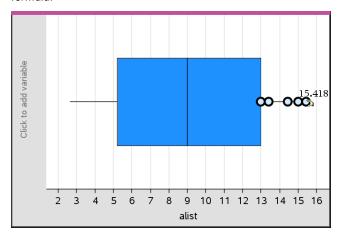

The pointer changes to an open hand to show that the data can be moved.


2. Drag the selection to explore how different values of the point affect the plot.


Handheld: Press otri 📉 to grab, and then swipe or use the arrow keys to drag.

As you drag, the changing value displays on the work area.

Overview of Raw and Summary Data

You can create plots directly from raw data or from a summary table.





Raw data

Summary table for eye colour based on raw data

- Raw data consists of a single list, such as a list of eye colours. When you create a
 plot of raw data, Data & Statistics counts the occurrences for you. Plotting raw
 data directly gives you flexibility in analysing it.
- A summary table consists of two lists, such as eye colours (the X or Y List) and counts of eye-colour occurrences (the Summary List). For more information, see Using Lists & Spreadsheet chapter.

Working with Numeric Plot Types

Plots can represent the data from a variable in a variety of ways. Choosing the appropriate plot can help you visualise the data. For example, you may be able to observe the shape and spread of the data in one plot type and another type may be useful for determining the best method for statistically evaluating data.

Creating Dot Plots

Dot plots, also known as dot-frequency plots, represent one-variable data. Dot plots are the default plot type for numeric data. When you plot a variable as a dot plot, one dot represents each value in the list. Each dot displays on the axis at a point that correspond to the value.

- 1. To create a dot plot, click the Add Variable region in the center of an axis and click the name of a numeric variable. For more information, see *Plotting Variables*.
- 2. (Optional) To split a dot plot by category, click the Add Variable region on the other axis and choose the list that contains the corresponding category data.
- 3. (Optional) To plot multiple dot plots, choose **Add X Variable** on the **Plot Properties** menu and click a numeric variable from the list that displays.

A second dot plot appears on the work area and the name of the plotted variable is added to both axis labels.

- 4. Explore the plotted data.
 - Hover over a data point to display data values.


- Drag a dot to move it. As you move a point, the values associated with it change on the work area display and in the list for the variable.
- Activate the Graph Trace tool and press ◀ or ▶ to move across the data points in the plot in list order. Points enlarge and display a bold outline as you move across them in Trace mode.

Creating Box Plots

The Box Plot Tool plots one-variable data in a modified box plot. "Whiskers" extend from each end of the box, either to 1.5 times the interguartile range or to the end of the data, whichever comes first. Points that are a width of 1.5 * Interquartile Range past the quartiles plot individually, beyond the whiskers. These points are the potential outliers. When no outliers exist, x-min and x-max are the prompt for the end of each whisker.


Box plots are useful for comparing two or more sets of data that use the same scale. If a dataset is large, a box plot can also be useful in exploring data distribution.

Click the Add Variable region in the centre of an axis. The default plot for one numeric variable is a dot plot. For more information, see *Plotting Variables*.



Note: If two variables are plotted in the work area, you can create a dot plot by removing one variable. Choose Remove X Variable or Remove Y Variable from the Plot Types menu.


2. On the Plot Types menu, click Box Plot.



A modified box plot displays on the Data & Statistics work area.

Note: You can split a box plot by category by adding a list that contains corresponding categorical data to the y-axis.

(Optional) To add additional variables for comparing box plots on the same axis, click Add X Variable on the Plot Properties menu.



For example, you can use multiple box plots to compare the distributions of sample proportions. In the example, true proportion is .5 and sample size varies from n=20 to n=40 to n=90.

Notes:

- You can create a box plot with frequency by choosing Add X Variable or Add Y Variable on the Plot Properties menu.
- You can specify a variable multiple times as you choose variables to plot as box plots.
- The variable used to provide frequency information is added to the label on the horizontal axis in the format: *x* variablename{frequencylist name}.

- 4. Point and click the regions of the box plot to explore and analyse the data it represents.
 - Hover over a region or over a whisker to display the details for the portion of the plot that interests you. The label for the quartile that corresponds to your selection is displayed.
 - Click a region of the box plot to select the data points or whiskers. Click again to remove the selection.
 - You can select any box plot that does not include frequency data and choose Dot Plot on the context menu to change the plot type.
 - Drag a selection to move it and explore other possibilities for the data.
 - Use the arrow keys to move a data point one pixel at a time.
 - Activate the Graph Trace tool and press ◀ or ▶ to move across dots and regions of the plot. As the trace cursor moves, the values for Q1, the median, Q3 and whisker ends/outliers are displayed.
- 5. Change the plot from a modified box plot to a standard box plot by choosing Extend Box Plot Whiskers on the Plot Properties menu.

The box plot is redrawn as a standard box plot with extended whiskers.

The standard box plot's whiskers use the minimum and maximum points in the variable and outliers are not identified. The whiskers on the plot extend from the minimum data point in the set (x-min) to the first quartile (Q1) and from the third quartile (Q3) to the maximum point (x-max). The box is defined by Q1, Med (median), and Q3.

Note: You can click Show Box Plot Outliers on the Plot Properties menu to return to the modified box plot.

Plotting Histograms

A histogram plots one-variable data and depicts the distribution of data. The number of bins displayed depends on the number of data points and the distribution of these points. A value that occurs on the edge of a bin is counted in the bin to the right.


Creating a Histogram from Raw Data

1. Create the list that you want to plot as a histogram. For example, you can enter or collect data as a named list on a Lists & Spreadsheet page.

	A ht	В	С	D	E	
=						
1	40					
2	40					
3	45					
4	45					
5	45					
6	45					
7	55					•
AI	40				•	

- 2. On a Data & Statistics page, click the x or y axis, and select your list as the data to plot.
- 3. From the Plot Types menu, click Histogram.

The data forms the bins of a histogram, with Frequency plotted by default on the unselected axis.



- Explore the data.
 - Hover over a bin to see the information for that bin.
 - Click a bin to select it. Click the bin again to deselect it.
 - Drag the side of a bin to adjust bin width and number of bins.

Note: The bins are not adjustable in categorical plots or plots in which you choose variable bin widths.


On the **Analyse** menu, click **Graph Trace** and press ◀ or ▶ to cycle through the bins and display their values.

Adjusting the Histogram Scale of Raw Data


- 1. On the Plot Properties menu, click Histogram Properties and choose Histogram Scale.
- 2. Choose the format for the scale of the histogram.
 - Frequency displays data based upon the number of values that occur within each bin. This is the default data representation.
 - Percent displays data in the histogram by each group's percent value of the whole data set.
 - Density displays data based upon the density of each group within the data set.

Creating a Histogram with Frequency or Summary Data

1. On a Lists & Spreadsheet page, create two lists: one containing the "bins", such as heights in a population (ht), and the other containing the frequencies of those heights (frea).



- 2. On a Data & Statistics page, access the context menu on the x axis, and click Add X Variable with Summary List.
- 3. Select ht as the X List and freq as the Summary List.



Note: It is up to you to set the data and bins in a meaningful way when using summary data.


Setting Equal Bin Widths

By default, bin widths are set to equal. You can specify the width and alignment of equal-width bins.

 On the Plot Properties menu, click Histogram Properties > Bin Settings and choose Equal Bin Width.

The Equal Bin Width Settings dialogueue box opens.

- 2. Type values to set Width and Alignment of the bins.
- 3. Click **OK** to apply the changes and redraw the bins.



Both the data represented by the bins and the value you type for the alignment affect the placement of bins on the scale.

Setting Variable Bin Widths

You can set variable bin widths based on a list of bin boundaries.

1. Create a named list containing boundary values.


For example, a boundary list defined as {60,70,100,110} will create bins at 60 to 70, 70 to 100 and 100 to 110.

Note: The data must fall within the specified bin widths. For example, a data point of 115 would be outside the bins in the above list, and you would receive a Data/Bin Location Mismatch error.

2. On the Plot Properties menu, click Histogram Properties > Bin Settings and choose Variable Bin Width.

The Variable Bin Width Settings dialogue box opens.

- Select your boundary list as the **List of Bin Boundaries**.
- Click **OK** to apply the changes and redraw the bins.



Note: You cannot change variable bin widths by dragging their boundaries; you must edit the list of boundaries or restore equal-width bins.

Creating a Normal Probability Plot

A normal probability plot shows one set of data against the corresponding quartile (z) of the standard normal distribution. You can use normal probability plots to judge the appropriateness of the normal model for your data.

- 1. Choose or create the data you want to use for a normal probability plot. Use a named list from Lists & Spreadsheet or Calculator.
- 2. Plot the data in one of the following ways:
 - Create a dot plot by selecting a column and choosing Quick Graph.
 - Add a Data & Statistics work area. Click the Add Variable region on an axis and click the data list name to plot the variable.
- 3. On the Plot Types menu, click Normal Probability Plot.

The data graphs in the Data & Statistics work area. You can examine the graph to compare the normal variable against the quartile.

- Explore the data represented in the normal probability plot.
 - Hover over a data point to display its value.
 - Click to select a data point. Click again to deselect it.
 - Click multiple data points to select them.
 - Activate the Graph Trace tool and press ◀ or ▶ to move across the data points and display values.

Creating a Scatter Plot


A scatter plot shows the relationship between two sets of data. You can also plot a scatter plot by using the Quick Graph tool in the Lists & Spreadsheet application.

1. In the Data & Statistics work area, click the Add Variable region and select the variable that contains the data you want to see represented on an axis.

The plot of the selected variable displays on the axis.

Click the Add Variable region of the other axis and select the variable containing the data you want to plot.

The data points shift to represent the data in the selected variable.



- Analyse and explore the data in the plot.
 - Click a point to select it.
 - Hover over a data point to view the summary data.
 - Work with the data using the available tools on the Analyse menu. For example, choose the Graph Trace tool and press ◀ or ▶ to move across the plot.

4. Optional: To plot additional lists against the x-axis, right-click the y-axis and click Add Variable.


Creating an X-Y Line Plot

An X-Y line plot is a scatter plot in which the data points are plotted and connected in order of appearance in the two variables. Like scatter plots, these plots depict the relationship between two sets of data.

By convention, the left-most column of data is represented on the horizontal axis.

- 1. Create a scatter plot. For more information, see *Creating a Scatter Plot*.
- On the **Plot Types** menu, click the **XY Line Plot** tool.

The data points within each set are connected to each other by a line.



Note: The dots are connected in the order that they appear in the list variable on the horizontal axis. To change the order, use the sort tool in Lists & Spreadsheet.

- Analyse and explore the data in the plot.
 - Hover over a data point to view the summary data.
 - Work with the data using the available tools on the Analyse menu. For example, choose the Graph Trace tool and press the arrow keys to move across the dots in the plot and view the values.

Working with Categorical Plot Types

You can sort and group data using the categorical plot types:

- Dot Chart
- Bar Chart
- Pie Chart


The categorical plot types can be used to compare the representations of data across different plots. When the same variable (list) is used for a dot chart and a bar chart or pie chart in a problem, selecting a data point or segment in one of the plots selects the corresponding data point, segment or bar in all other plots that include the variable.

Creating a Dot Chart

The default plot type for categorical data is the dot chart.

When one variable is plotted, the value of each cell is represented as one dot, and the dots are stacked at the point on the axis that corresponds to the cell value.

1. In Lists & Spreadsheet, create a spreadsheet that includes at least one column of string values that can be used as categories for data.



Note: To type a string in Lists & Spreadsheet, enclose the characters in quotes.


2. Add a Data & Statistics page to the problem.

Notes:

- You can also use the Lists & Spreadsheet Quick Graph tool to automatically add a Data & Statistics page and plot the selected column.
- The new Data & Statistic work area displays a default caseplot with a caption, variable name and unplotted data points for the variable. You can click the variable name in the caption to choose another variable for previewing, or drag a default data point toward an axis to plot the current variable.
- 3. Move near the centre of either axis and click the Add List region. The list of variables displays.



Click the list that contains the categories you want to use for sorting data.



A dot chart plots in the work area. The application labels the axis with the variable name and shows a dot for each instance of a category.


- 5. Explore the plotted data.
 - Hover over a dot in the plot to display data values.
 - Click a dot to select it. Click the dot a second time to deselect it or remove it from a selection of multiple dots.
 - Activate the Graph Trace tool and press ◀ or ▶ to move across the points in list order. Dots display a bold outline as you move across them in Trace mode.

Creating a Bar Chart

Like dot charts, bar charts display categorical data. The length of a bar represents the number of cases in the category.

- 1. Click the Add Variable region of either axis and choose the name of a categorical variable. For more information, see Creating a Dot Chart.
- 2. On the Plot Types menu, click Bar Chart.

The dot chart changes to a bar representation of the data.



- Explore the data in the plot.
 - Hover over a bar to see a category summary (the number of cases and percentage among all categories).
 - Activate the Graph Trace tool and press ◀ or ▶ move across the bars and view summary information.


Creating a Bar Chart from a Frequency Table or Summary Data

1. On a new Data & Statistics page, create a bar chart with frequency or summary data by choosing Add X Variable on the Plot Properties menu.


Note: You can also create a bar chart with frequency by selecting Add Variable with Summary List from the context menu of the Add Variable region of an axis.

- 2. Select the desired variable from the pop-up choices.
- 3. Set the height of the bars with the summary variable by selecting Add Summary List from the Plot Properties menu.
- Select the summary list from the pop-up choices.

The bar chart plots on the work area. The icon in the lower left corner indicates that this plot was generated from summary data.



- 5. Hover over a bar to see a category summary, or use the Graph Trace tool on the Analyse menu to move across all of the bars displaying the summaries.
- (Optional) Add summary lists to create a comparative bar chart.




Creating a Pie Chart

A pie chart represents categorical data in a circular layout and uses an appropriately proportioned segment for each category.

- Create a dot chart on the work area.
- 2. On the Plot Types menu, click Pie Chart.

The dots move by category into the segments of the pie chart.




3. Hover over a segment to see the summary for the category, or use the Graph Trace tool on the Analyse menu to move across each segment displaying all of the summaries. The summary shows the number of cases for the category and the percentage among all cases.

Note: You can switch to a pie chart from a bar chart generated from summary data.

Creating a Comparative Bar Chart

This might be used to explore data in a two-way table.

1. Type the raw data on a Lists & Spreadsheet page.




From the Insert menu in the toolbar, click Data & Statistics.




Note: Your screen may differ, depending on the data you entered.

- 3. Select the Click to add variable field, and select eye colour as the variable for the x axis.
- On the Plot Type menu, click Bar Chart.

The frequency of the eye colour data is plotted.



To split the eye colour data by gender, click the Plot Properties menu, click Split Categories by Variable and then click gender.




Splitting a Numeric Plot by Categories

You can use a categorical split to sort the values plotted on an axis.


Open a problem that includes a Lists & Spreadsheet page, or create data to be plotted in the Lists & Spreadsheet application.

In this example, lists contain dog breed and daily walk information.




- 2. Click column letter (B).
- 3. On the Lists & Spreadsheet Data menu, click the Quick Graph tool.

The Quick Graph tool adds a Data & Statistics page. Data & Statistics plots the variable and labels the horizontal axis.



4. To plot the numeric data for each category, hover on the Add Variable region near the centre of the vertical axis and click the tooltip Click or Enter to add variable.

The list of available variables displays.



On the list of variables, click the name of the category variable.

Data & Statistics labels the vertical axis and plots the numeric data for each category.



Exploring Data


You can manipulate and explore plotted data.

Moving Points or Bins of Data

1. Click and hold the desired point or bin.

The pointer changes to an open hand \Im .

2. Drag the point or bar to the new location and release it. Moving the point changes the values for x and y.

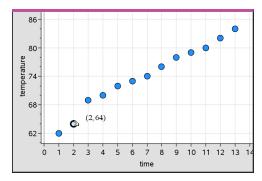


If you are working with data from Lists & Spreadsheet, the data that corresponds to the original point or bar automatically updates in the original column(s) in Lists & Spreadsheet as you move the point.


You can also move points or bins by changing the numbers in the Lists & Spreadsheet or Calculator applications. Data will update in all of the representations.

Moving Multiple Points

1. Position the pointer over each data point that you want to select. When the pointer changes to an open hand 2, click to add the point to the selection.

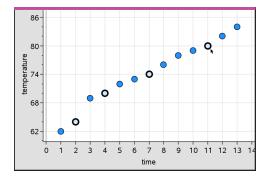

Alternatively, you can drag a selection rectangle around the points to select them.

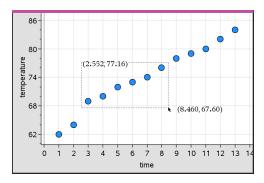


2. Drag any of the selected points to move them all.

Note: When a list is defined in Lists & Spreadsheet as a formula, the movement of points is restricted to positions that satisfy the formula.

Sorting Plotted Categories

You can sort plotted categories in list order, value order or alphabetically by category name.

- 1. Click the work area that contains the plotted data.
- 2. On the Actions menu, click Sort and then click the type of sort.

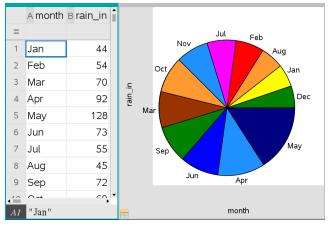

Months listed chronologically but sorted by value (amount of rainfall)


Note: You can customise the order of the categories by clicking a label and dragging it.

Plotting a Value

You can plot a value on an existing plot. It displays as a vertical line in the work area.

1. From the Analyse menu, click Plot Value.

A text box with a default expression opens in the work area.

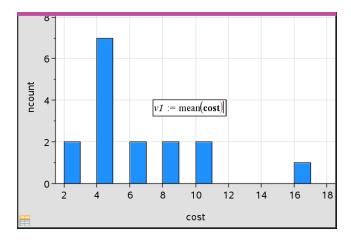


2. Type the value you want to plot, and press Enter. In this example, the value is v1:= mean(cost).

The line is drawn at that value, perpendicular to the axis. If you have multiple plots on the work area, a plot value segment displays for each plot.

Note: If you use a frequency table to generate a histogram, reference the frequency list in your expression. For example, type the expression "v1:= mean(List, FreqList)" in the plot value entry box.

3. Click the line to display the value.

Note: Double-click the value to edit the expression.

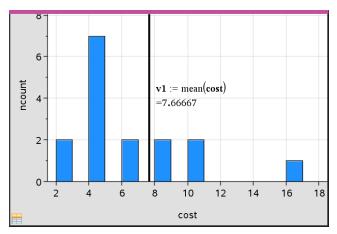

Plot value with value displayed

You can use Plot value for a single number or any expression that evaluates to a number. If the value is dependent on the data, like mean, when you drag a point or make changes in the Lists & Spreadsheet application, the line updates to reflect the change, allowing for investigation of the influence of points on the calculation.

Removing a Plotted Value

- 1. Select the plotted value line.
- 2. From the Actions menu, click Remove Plotted Value.

Changing the Plot Type

You can change the plot type, to view different representations of data.

On the Plot Type menu, click a new plot type. Only the supported plot types are available. For example, only univariate plot types are available when a single variable plotted on an axis.

The data representation changes to the new plot format.

Note: Options are unavailable on the menu if the plotted data cannot be represented by the plot type. For example, if a scatter plot is displayed in the work area, you cannot create a box plot without first removing the variable from the yaxis.


Rescaling a Graph

You can change the scale of the axes by using Translation and Dilation. The pointer changes to indicate whether Translation (+) or Dilation (+) is available in zones on the axes.

Translation

A translation slides a set of axes a fixed distance in a given direction. The original axes have the same shape and size.

1. Position the pointer over a tick mark or label in the middle third of the axis. The pointer changes to ⊕.

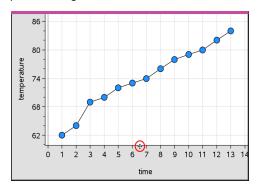


2. Click to grab. The pointer changes to a grasping hand ♥ Drag to the desired position and release.

Dilation

Dilation retains the shape of the axes, but enlarges or reduces the size.

1. Position the pointer over a tick mark or label near the ends of the axis. The pointer changes to \(\ddagger\) on the vertical axis or \(\dagger\) on the horizontal axis.

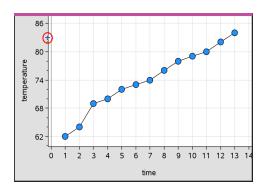


2. Click to grab. The pointer changes to an open hand 2. Drag to the desired position and release.

Adding a Movable Line

You can add a movable line to a plot. Moving and rotating the line on the work area changes the function that describes it.

From the Analyse menu, click Add Movable Line.

The movable line displays and is labelled with a function that describes it. For this example, Data & Statistics stores the expression for the movable line in the variable m1.

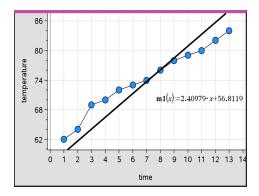


Rotating a Movable Line

1. Click and grab either end of the line.

The pointer changes to 45.

2. Drag to rotate and change the slope of the line.

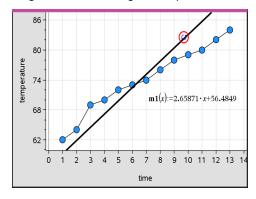


The function m1(x) is updated for the changes in the position of the movable line.

Changing the Intercept

1. Click in the middle of the movable line.

The pointer changes to ⊕.

2. Drag to change the intercept.



The number at the end of the equation changes to show the change in the intercept.

Note: The movable line is stored as a function that can be used for prediction in the Calculator application.

Locking the Intercept at Zero

You can lock the intercept of the movable line at zero.

From the Analyse menu, click Lock Intercept at Zero.

You can unlock the intercept by choosing Unlock Movable Line Intercept on the Analyse menu.

Tracing a Movable Line

You can trace a movable line to predict and analyse values.

1. Click the line.

The pointer changes.


- From the Analyse menu, click Graph Trace to enable Trace mode for the line. Rotation of the line is not supported in Trace mode.
- Press ◀ or ▶ (left or right arrow keys) to trace the movable line. If the plotted variables change, points on the graph and the line are updated

Showing a Line of Regression

automatically.

You can show a line of regression when you have a scatter plot or an X-Y line plot on the work area. Studying the line of regression can help you understand the relationship between two variables.

- 1. With a scatter plot or X-Y line plot of two variables on the work area, click the Analyse menu, choose Regression and view the list of regressions.
- 2. Click the type of regression line to show. For example, choose Show Linear (mx+b) to plot a linear regression line as shown in the following example.




When the line of regression is selected, the expression for the line displays.

Showing Residual Squares

You can display residual squares on a plot. Residual squares can help you assess the appropriateness of the model for your data.

Note: This tool is only available when a regression or movable line is present in the work area.

From the Analyse menu, click Residuals > Show Residual Squares.




The sum of squares is updated as the line or data changes.

Showing a Residual Plot

You can show a residual plot to determine how well a line fits data. The work area must include a scatter plot and one or more movable lines, regressions or plotted functions for Show Residual Plot to be available.

With a scatter plot, line of regression and/or movable line in the work area, click the Analyse menu and click Show Residual Plot > Residuals.



Notes:

- With multiple regressions or functions and movable lines plotted, you can select each by clicking the line to show its residual plot.
- Click and hold a dot on the residual plot to see the residual.
- The residual plot for the selected regression or function displays in the work area.
- For consistency in comparing sets of data, residual plots do not rescale when you
 move from one function or regression to another.
- Select a function or regression before a showing residual plot. If no function or regression is selected and there are several plotted, Data & Statistics arbitrarily selects the function or regression for showing the residual plot.
- · Axes can be adjusted by clicking and dragging.

Removing a Residual Plot

 With a scatter plot, line of regression and/or movable line in the work area, click the Analyse menu, and click Hide Residual Plot.

Using Window/Zoom Tools

Use the Window/Zoom tools to redefine the graph to better view points of interest. The Window/Zoom tools include:

- Window Settings: displays a Window Settings dialogue box that lets you type the x-min, x-max, y-min, and y-max values for the axes.
- Zoom Data: adjusts the zoom factor to display all plotted data.
- Zoom In: lets you define the centre point of the zoom in location. The Zoom In factor is approximately 2.
- Zoom Out: lets you define the centre point of the zoom out location. The Zoom
 Out factor is approximately 2.

Using the Window Settings Tool

1. On the Window/Zoom menu, click Window Settings.

The **Window Settings** dialogue box opens. The current values for x-min, x-max, y-min and y-max are displayed in the fields.

Note: Only the appropriate boxes are editable, depending on whether there are one or two axes in the work area.

- 2. Type the new values over the old values.
- 3. Click **OK** to apply the changes and redraw the plot.

Using the Zoom Data Tool

On the Window/Zoom menu, click Zoom Data.

The work area rescales to display all plotted data.

Using the Zoom In Tool

- 1. On the Window/Zoom menu, click Zoom In.
- 2. In the work area, click the centre point of the area of interest. This will be the centre of the zoom in action.

The plot redraws to focus and enlarge the portion of the plot centred about the point you selected in the previous step.

Using the Zoom Out Tool

- 1. On the Window/Zoom menu, click Zoom Out.
- 2. In the work area, click the centre point of the area of interest. This will be the centre of the zoom out action.

The plot redraws to display a larger portion of the plot, centred about the point you selected in the previous step.

Graphing Functions

You can graph functions by typing them in Data & Statistics, or you can graph functions defined in other applications.


Graphing Functions Using the Plot Function Tool

You can use the Plot Function tool to plot functions in a work area that already includes a plot on the axes. Plot Function lets you specify and graph a function for comparison to an existing plot.

To use the Plot Function tool:

- 1. Create or open a problem that includes variables (from Lists & Spreadsheet) that are plotted on a Data & Statistics work area. Ensure that your work area contains both a horizontal axis and a vertical axis scale.
- 2. From the Analyse menu, click Plot Function.

A function entry field displays in the work area.

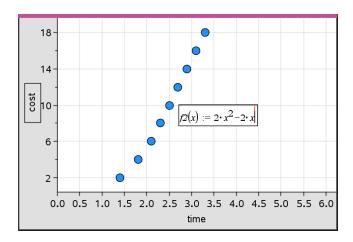


Note: You can edit the function's expression typed in the entry field. However, the function graphed in Data & Statistics cannot be manipulated or moved around the work area. To do that, use Graphs & Geometry.

3. Type the function in the entry field, and press Enter.

Note: You can rename the function by typing over f1(x): with another name, if you choose.

The function graphs in the work area and is saved as a variable for use in other applications.

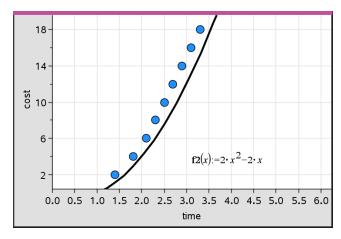

Entering Functions from Other Applications

You can enter a function that has been defined as a variable in another application, such as Lists & Spreadsheet, Graphs & Geometry or Calculator.

- 1. Add a variable to each axis. You can access any variables defined in a Lists & Spreadsheet or Calculator application in your problem from the variable list.
- From the Analyse menu, click Plot Function.


A function entry field displays in the work area.

3. Click on the toolbar.

Handheld: Press var].

A list of variables available in the problem displays.


Click to select the variable containing the function you want to plot.

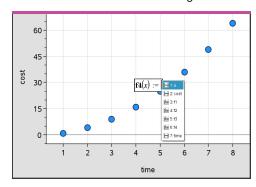

In the example below, the variable a contains the function $f(x)=x^2$.

Press Enter. 5.

The function plots in the work area.

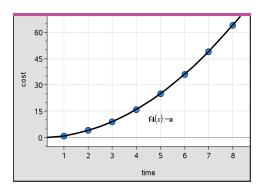

Editing a Function

You can edit a function and update it in the work area.

- 1. You can edit a function by double-clicking the equation and then making changes as required.
- 2. Press Enter after making all changes and the updates are displayed in the work area.

Using Data & Statistics Functions in other Applications

Data & Statistics functions are stored as variables, and may be used in other applications, in the same manner as any other variable. Support for all function types is included.


Note: Function numbers increment to use the next available. If you have defined f1(x) and f2(x) in Graphs & Geometry, the first function you create in Data & Statistics will be f3(x).

Using Show Normal PDF

You can approximate data plotted in the Data & Statistics work area against the normal probability density function. The tool overlays the normal probability density function using the mean and the standard deviation of the data in the histogram.


To show the normal probability density function for plotted data:

- 1. Add a variable to the x-axis.
- 2. On the Plot Types menu, click Histogram.

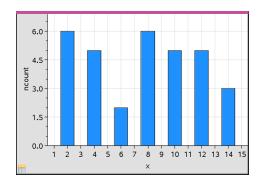

Note: Show Normal PDF is available only when histogram is the plot type.

From the Analyse menu, click Show Normal PDF.

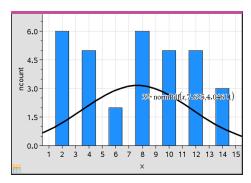

The normal PDF for the graph plots in the work area. The expression used to calculate the PDF displays when selected.


You can click Hide Normal PDF on the Analyse menu to remove the PDF.

Using Shade Under Function

Use Shade Under Function to find the area of a selected region under a function graphed in the work area.

- 1. Select any function graphed in the Data & Statistics work area. For example, select a previously graphed normal PDF.
- 2. From the Analyse menu, click Shade Under Function.

The pointer becomes a dotted vertical line and the boundary +/- ∞ displays when you position the mouse near the boundary on the left or right. You can click when ∞ displays to set it as a boundary.

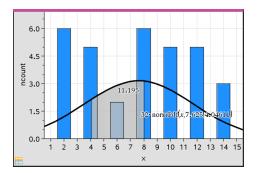

- Select a point on the curve and click to indicate where to start shading under the function. The direction in which you move next determines whether the region shaded is on the left, right or centre of the curve.
- Select a point on the curve and click to indicate the end boundary of the shaded area. A region under the function is shaded based on the points you selected.

You can work with Shade Under Function in the following ways:

- Select the region to display the values for data points in the shaded area.
- To remove the shading, right-click or Ctrl-click the shaded region and choose Remove Shaded Region.
- To change the fill colour of the shaded area, right-click or Ctrl-click the shaded region, choose Colour, choose Fill and click a colour.
- Use plot value to set the boundary to an exact number. When a boundary for shading is set to a plotted value, you can change the plotted value to update the shading.
- Edit a shaded region by clicking and dragging the edge at the starting or ending boundary.

Using Graph Trace

Graph Trace lets you move from one point on a graph to another to analyse variations in the data. You can use Graph Trace mode to explore the data for the following graphs.

- Graphs from Plot Function and Show Normal PDF
- Distribution curves (created in the Lists & Spreadsheet application)
- Movable Lines

- Regressions
- Caseplots
- Dot plots
- Scatter plots and X-Y line plots
- Box plots
- Histograms
- Bar charts
- Pie charts

To use Graph Trace

- From the Analyse menu, click Graph Trace.
- 2. Press ◀ or ▶ to move across the plot.

The data representations enlarge and appear with a bold outline as you move across them in Trace mode.

Customising Your Workspace

Working with Colour

All data points for a plotted variable display in the same colour to distinguish them from the data points of other variables. Data plotted by category and split plots are automatically displayed in different colours to help you distinguish the data.

To emphasise or distinguish certain parts of your work, you can change the default colour for a variable's data.

- Apply fill colours to objects, such as shading, or change the colour for a variable's data points.
- Apply colour to plotted lines (such as lines of regression) or movable lines.

Inserting a Background Image

When using the computer software, you can insert an image as a background for a Data & Statistics page. The file format of the image can be .bmp, .jpg or .png.

- 1. From the Insert menu, click Image.
- Navigate to the image that you want to insert.
- 3. Select it, and then click Open.

The image is inserted as a background.

For more information, see the Working with Images chapter.


Working with Text

The Insert Text tool lets you type text to describe details related to plots on the work area.

1. From the Actions menu, click Insert Text.

A text box opens.


2. Type notes or descriptions in the text box.



- Customise the text to suit your needs.
 - Move the pointer over the edges of the text box to drag the borders and change the width or height.
 - Click and grab the text box to move it near objects that relate to the text.
 - Scroll to view additional text in a box by clicking the arrows at the top and bottom edge.
 - Click outside of the text entry box to exit the Text tool.
 - Hide text by clicking the Actions menu and clicking Hide Text.
 - Change the colour of text.

Adjusting Variable Values with a Slider

A slider control lets you interactively adjust or animate the value of a numeric variable. You can insert sliders in the Graphs, Geometry, Notes and Data & Statistics applications.

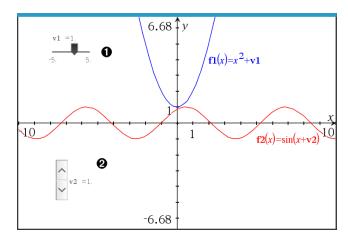

- lacktriangle Horizontal slider for adjusting variable v1.
- **2** Minimised vertical slider for adjusting variable v2.

Note: TI-Nspire™ version 4.2 or higher is required for opening .tns files containing sliders on Notes pages.

Inserting a Slider Manually

1. From a Graphs, Geometry or Data & Statistics page, select Actions > Insert Slider. -or-

From a Notes page, make sure the cursor is not in a maths box or chem box, and then select Insert > Insert Slider.

The Slider Settings screen opens.



2. Enter the desired values, and click OK.

The slider is displayed. On a Graphs, Geometry or Data & Statistics page, handles are displayed to let you move or stretch the slider.




To remove the handles and use the slider, click an empty space in the work area. You can show the handles any time by selecting Move from the slider's context menu.

- 3. To adjust the variable, slide the pointer (or click the arrows on a minimised slider).
 - You can use the **Tab** key to move the focus to a slider or to move from one slider to the next. The colour of the slider changes to show you when it has the focus.
 - When a slider has the focus, you can use the arrow keys to change the value of the variable.

Working with the Slider

Use the options on the context menu to move or delete the slider, and to start or stop its animation. You can also change the slider's settings.


Display the slider's context menu.



2. Click an option to select it.

Automatic Sliders in Graphs

Sliders can be created for you automatically in the Graphs application and in the analytic window of the Geometry application. You are offered automatic sliders when you define certain functions, equations or sequences that refer to undefined variables.

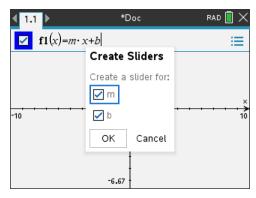


Inferential Statistics

You can explore hypothesis tests and probability distributions in the Data & Statistics application after entering the data on a Lists & Spreadsheet page.

Drawing Inferential Statistics Plots

The following example uses the Draw option of the normCdf() function to plot a distribution model.


- 1. On a Lists & Spreadsheet page, select the column-formula cell (second cell from the top) in column A.
- 2. From the Statistics menu, click Distributions, and click Normal Cdf.



- Type the plot parameters into the **Normal Cdf** wizard.
- 4. Select the **Draw** box to see the distribution plotted and shaded in Data & Statistics.

Note: The Draw option is not available for all distributions.

5. Click OK.

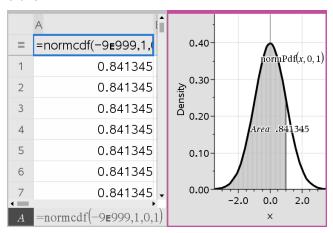


Exploring Inferential Statistics Plots

After drawing the plot in the previous example, you can explore the effect of changing the upper bound.

On the Data & Statistics plot, drag the vertical line that represents the upper bound toward the left or right.

As you drag, the formula is updated and the shaded area is recalculated.

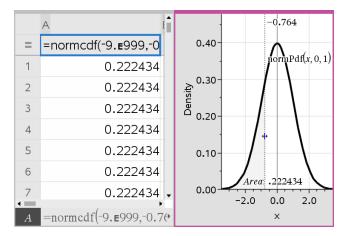

Notes Application

The Notes application lets you create and share text documents using the TI-Nspire™ handheld and computer software. Use **Notes** to:

- Create study notes to reinforce learning, demonstrate your understanding of classroom concepts and review for exams.
- Edit collaboratively by assigning different roles to individuals using your document so that any edits appear in a different text format.
- Create and evaluate maths expressions.
- Create correctly formatted chemical formulas and equations.

Adding a Notes Page

To start a new document with a blank Notes page:


From the main File menu, click New Document and then click Add Notes.

Handheld: Press 🖾 on, and select Notes 📃.

To add a Notes page in the current problem of an existing document:

From the toolbar, click Insert > Notes.

Handheld: Press docv and select Insert > Notes.

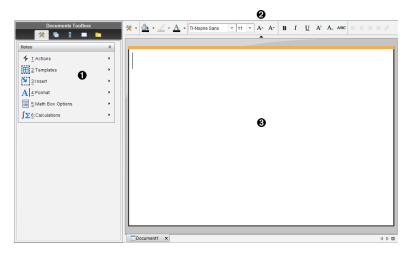

- Notes tools Available any time you are in the Notes work area.
- Text formatting toolbar Lets you change size, colour, bold and other text properties.
- Notes work area The area where you type and format text.

Using Templates in Notes

Use the options on the Templates menu to select a format for your Notes page.

	Menu Option	Function
2: Templates		
	1: Q&A	Creates a template to enter question and answer text.
	2: Proof	Creates a template to enter statement and reason text.
	3: Default	Lets you type freeform text.
	4:Hide Answer (Q&A)	Toggles to show or hide the Answer in a Q&A format.

Selecting a Template

Complete the following steps to select and apply a template:

- 1. From the Notes menu, click !...
- 2. From the menu, click the template you want to apply.

Handheld: From the Notes work area, press menu, and then press ▶ to display the menu options.

The Notes page is displayed in the format you selected.

Using the Q&A Template


Use the Q&A template to create questions and answers. You can show or hide the answer so you can create questions for review and hide the answers. When you use the document as a study aid, you can verify that your answers are correct.

Press **Tab** to move the text cursor between the **Question** and **Answer** areas of the template.

Using the Proof Template

The proof template provides an outline structure for statements and corresponding reasons.

Press Tab to move the text cursor between the Statements and Reasons areas of the template.

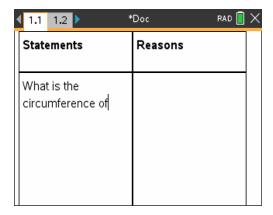

Formatting Text in Notes

Text formatting lets you apply visual properties, such as bold and italic, to your text.

- Ordinary text. Apply most combinations of bold, italic, underline, superscript. subscript, and strikethrough formatting. Select font and font size for any character.
- Text in a maths expression box. Apply formatting and enter maths exponents and maths subscripts for variable names. Select font and font size. Font size affects all text in the box.
- Text in a chemical equation box. Apply formatting. Select font and font size. Font size affects all text in the box. Superscript and subscript are handled automatically.

Selecting Text

Drag from the starting point to the ending point to select the text.


Handheld: If you are using the Q&A or Proof template, press tab to place the cursor in the area containing the text. Use the Touchpad to place the cursor at the start or end of the text to be selected. Hold down from the shift, and use the Touchpad to select the text.

Applying a Text Format

- 1. Select the text that you want to format.
- 2. On the formatting toolbar, click the formatting icons (such as **B** for bold) to toggle them, or click to select a font and font size.

Handheld: Click menul, and then select Format > Format Text.

The changes are applied to the text as you make selections.

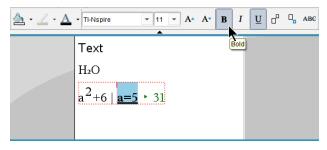

Note: The toolbar shows only the icons that are applicable to the type of text selected. For example, superscript (A^a) and subscript (A_a) are shown only for ordinary text.

Using Colour in Notes

When working in the Notes application on a desktop, use the \triangle (fill colour) or the \triangle (text colour) options on the Documents Workspace toolbar to emphasise words, calculations and formulas.

You can also apply colour to text when working in the Notes application on the TI-Nspire™ CX handheld.

Changing Text Colours

- Select the text you want to change to another colour. You can select a sentence, phrase, word or a single letter. You can also select a maths expression box, a chemical equation box or individual characters in a calculation, formula, chemical equation or maths template.
- 2. From the Documents Workspace toolbar, click \triangle .

Handheld: Press docv, and then click Edit > Text Colour.

The Text Colour palette opens.

3. Click a colour to apply it to the selected text.

Applying a Background Colour

You can apply a background colour to highlight selected characters in ordinary text, text in a maths expression or text in a chemical equation box.

- 1. Select the text.
- 2. From the Documents Workspace toolbar, click the arrow next to 4.

Handheld: Press docv, and then press Edit > Fill Colour.

The Fill Colour palette opens.

3. Click a colour to apply it to the selected text.

Inserting Images

When working in the Notes application on a desktop, use the Images option on the Insert menu to add an image to a Notes page.

Note: The option for inserting an image is not available when working on a handheld. However, you can transfer a file containing an image from your computer to a TI-Nspire™ CX handheld and colours are retained.

Click Insert > Image from the Documents Toolbar.

The Insert Image window opens.

- 2. Navigate to the folder where the image is located.
- 3. Select the image, and then click Open to insert the image into the Notes work area. Valid files types are .jpg, .png or .bmp.
- 4. To type text around the image, place the cursor in front of the image or after the image, and then type the text.

Resizing an Image

Complete the following steps to resize an image.

- 1. Click the image to select it.
- 2. Move the cursor to the edge of the image.

The cursor changes to a left-right arrow symbol.

- 3. Click the mouse and hold to enable the a tool, and then drag the image to make it smaller or larger.
- 4. Release the mouse button when the image is sized correctly.

For more information, see Working with Images.

Inserting Items on a Notes Page

When working with the Notes application, open the Insert menu to insert a maths expression, chemical equation, shape symbol, or a comment.

Menu Name	Menu Option	Function
3: Ins	sert	
	1: Math Box	Lets you insert a maths expression.


Menu Name	Menu Option	Function
	H ₂ 2: Chem box	Lets you insert a chemical formula or equation.
	3: Shape	Marks the selected text as an angle, triangle, circle, line, segment, ray, or vector.
	4: Comment	Lets you type text that is italicised and prefaced with Teacher or Reviewer .
	→ 5: Slider	Lets you insert a slider.

Inserting Comments

You can insert Teacher or Reviewer comments into a Notes application. Comments are easy to distinguish from the original text.

- 1. Define the type of comments you're inserting (Teacher or Reviewer):
 - On the Insert menu, click Comment, and then click Teacher or Reviewer.
 - Handheld: While in the Notes work area, press menu to display the Notes menu. Press Insert > Comment, and then either Teacher or Reviewer.
- 2. Type your text.

Text that you type appears in italics.




Inserting Geometric Shape Symbols

You can use geometric shape symbols to designate selected text as geometric objects, such as an angle, circle or line segment.

To insert a shape symbol, position the cursor where you want it, and then do the following:

- On the Insert menu, click Shapes, and then select the shape to apply.
- Handheld: Press menu to display the Notes menu. On the Insert menu, press Shapes, and then press the shape to apply.



Entering Maths Expressions in Notes Text

You can include maths expressions in Notes text, using the same tools as in other TI-Nspire[™] applications.

Maths expression boxes have attributes that allow you to control how the expression is displayed.

Menu Name	Menu Option	Function
5: Maths Box Options		
	1: Maths Box Attributes	When a maths box is selected, this option opens a dialogue box allowing you to customise the maths box. You can hide or show input or output, turn off calculation for the box, insert symbols, change display and angle settings, and allow or disallow the wrapping of expressions and the display of warning indicator after they have been dismissed. You can change the attributes of multiple selected maths boxes at the same time.
	2: Show Warning Info	Displays a warning indicator after the warning has been dismissed.

Menu Name	Menu Option	Function
	3: Show Error	Displays an error after the error has been dismissed.

Entering an Expression

- 1. In the Notes work area, position the cursor where you want the expression.
- 2. From the Insert menu, select Maths Box.

—or— Press **Ctrl + M** (Mac®: Press **光+ M**).

An empty maths expression box is displayed.



- 3. Type the expression in the box. You can use the Catalogue, if necessary, to insert a function, command, symbol or expression template.
- 4. To exit the maths box, click anywhere outside it.

Evaluating and Approximating Maths Expressions

You can evaluate or approximate one or more expressions and display the results. You can also convert selected text and multiple maths expression boxes into a single maths expression box. Notes automatically updates expressions and any variables used.

Menu Name	Menu Option	Function
★ 1: Actions		
	1+1= 1: Evaluate - enter	Evaluates the expression.
	≈ 2: Approximate ctrl enter	Approximates the expression.
	3: Evaluate and replace	Replaces the selected part of the expression with the result.
	4: Deactivate	Deactivates the current or selected item (box or boxes)
	5: Deactivate All	Deactivates all boxes in the current Notes application.

Menu Name	Menu Option	Function
	■+□ 6: Activate	Activates the current or selected previously deactivated item.
	7: Activate All	Activates all boxes in the current Notes application.

Evaluating or Approximating an Expression

To evaluate or approximate an expression, place the cursor anywhere in the maths expression box and then do the following:

- Windows®: On the Actions menu, click Evaluate or Approximate. You can also use Enter to evaluate or Ctrl + Enter to approximate.
- Mac[®]: Press \mathcal{H} + Enter to approximate.
- Handheld: Press menu to display the Notes menu. On the Actions menu, select Evaluate.

The result replaces the expression.

Evaluating Part of an Expression

To evaluate part of an expression, select the text or part of the maths expression. Then do the following:

On the Actions menu, click Evaluate and Replace.

Handheld: Press menu to open the Notes menu. Select Actions, and then select Evaluate Selection.

The result replaces the selected part only.

Breaking Long Calculations

Some calculations may take a long time. Notes indicates that the handheld is performing a long calculation by displaying a busy icon. If a calculation is taking more time than you want to spend, you can end the calculation.

To stop the function or programme in progress, do the following:

- Windows®: Hold down the **F12** key and press **Enter** repeatedly.
- Mac[®]: Hold down the **F5** key and press **Enter** repeatedly.
- Handheld: Hold down the Gion key and press [enter] repeatedly.

Showing Warnings and Errors

If a calculation in Notes results in a warning or error, you can view the warning or error again even after you have dismissed the dialogue box.

To display a warning or error in Notes after you have dismissed the dialogue box, do one of the following:

- Windows®: Right-click and select **Show warning info** or **Show error**.
- Mac[®]: \mathcal{H} + click and select **Show warning info** or **Show error**.

Note: You can change your settings so that warnings do not appear at all. The showing of warning indicators is controlled by the Maths Box Attributes dialogue box. See Changing the Attributes of Maths Expression Boxes.

Converting Selected Items to Maths Expression Boxes

To convert items to maths expression boxes:

- 1. Select the text, or combination of text and existing maths expression box, that you want to evaluate.
- 2. From the Actions menu, click Convert to Maths Expression Box.

Using Maths Actions

Maths Actions are available on Notes, Scratchpad and Calculator pages.


When you display the context menu for a selected expression or equation, the menu may include a Maths Actions submenu that lists the available actions. Each action might prompt you for any needed parameters.

The specific maths actions listed depend on:

- The type of expression or relation.
- The operating system in use (Numeric, Exact Arithmetic, or CAS).
- Any restrictions imposed by an active Press-to-Test session.

Example of Maths Actions in Notes

Insert a maths box, and type the equation $x^2+3x+1=0$, but don't press **Enter** yet.





2. Display the context menu of the equation, and select Maths Actions.

Windows®: Right-click the equation.

Mac[®]: Hold \mathcal{H} , and click the equation.

Handheld: Point to the equation, and press ctrl menu.






Numeric and Exact Arithmetic OS


CAS OS

- 3. Select the action to perform:
 - Solve Numerically for Numeric and Exact Arithmetic OS.
 - Solve for CAS OS.

You are prompted to enter parameters. For example, Numeric Solve prompts for the variable of interest, initial guess, lower bound and upper bound.

4. Type a value for each parameter. When options are available, you can click an arrow to make a selection.





Numeric and Fxact Arithmetic OS

CAS OS

5. Click **OK** to construct the completed expression and place it in the maths box.

$$nSolve(x^2+3x+1=0,x=-2) \mid -5 \le x \le -1$$

Numeric and Exact Arithmetic OS CAS OS

6. Press Enter to complete the action.

nSolve
$$(x^2+3\cdot x+1=0,x=-2)|-5 \le x \le -1$$

• -2.61803

Numeric and Exact Arithmetic OS

solve
$$(x^2+3\cdot x+1=0,x)$$

 $x=\frac{-(\sqrt{5}+3)}{2}$ or $x=\frac{\sqrt{5}-3}{2}$

 2 +3x+1=0,x

CAS OS

7. As a further exploration, drag through the maths box to select $x^2+3\cdot x+1$. Do not include the "=0" portion.

Numeric and Exact Arithmetic OS

solve
$$(x^2+3; x+1]=0, x$$

 $x=\frac{-(\sqrt{5})^2}{2}$ or $x=\frac{\sqrt{5}-3}{2}$

CAS OS

Display the context menu for the selected text, select Maths Actions > Find Roots of Polynomial, and press Enter to complete the action.

The action and its result are shown in a new maths box.

polyRoots
$$(x^2+3\cdot x+1,x)$$

 $\cdot \{-2.61803, -0.381966\}$

Numeric OS

$$polyRoots(x^2+3\cdot x+1,x)$$

$$\left\{\frac{-(\sqrt{5}+3)}{2}, \frac{\sqrt{5}-3}{2}\right\}$$

Exact Arithmetic and CAS OS

Tips for Using Maths Actions in Notes

 For a previously evaluated expression, click in the expression and then display its context menu.


When you select an action, it replaces the expression.

- ► For a displayed result, click in the result and then display its context menu.
 - When you select an action, it appears in a new maths box.
- For a portion of an expression or result, select the portion and then display the context menu.

When you select an action, it appears in a new maths box.

Graphing from Notes and Calculator

You can graph a function or relation directly from its context menu. This feature is available for many functions and relations on Notes, Scratchpad and Calculator pages.

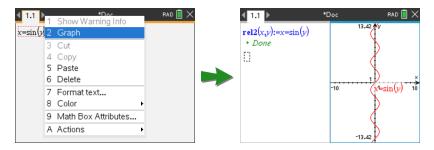

If page layout options allow, the graph appears on the same page as the function or relation. Otherwise, the graph appears on a separate Graphs page.

The type of graph created depends on:


- The type of function or relation.
- Any restrictions imposed by an active Press-to-Test session.

Example of Graphing from Notes

This example uses a Notes page to explore a quadratic function interactively.

Insert a maths box on a new Notes page, and enter the following function definition:

Define
$$f1(x)=x^2-1 \cdot x-4$$




2. Display the context menu of the Define statement.

Windows®: Right-click the statement.


Mac[®]: Hold \mathcal{H} , and click the statement.

Handheld: Point to the statement, and press ctrl menul.




3. Select **Graph** from the context menu.

The graph appears. The graph and the maths box are linked so that any adjustment to one affects the other.



- 4. Explore the relationship between the defined function and its graph:
 - Drag the ends or centre of the graph to manipulate it, and observe the changes to the function definition.

 Edit the defined function in the maths box, and observe the changes to the graph.



Inserting Chemical Equations in Notes

Chemical equation boxes (chem boxes) make it easy to type chemical formulas and equations, such as $CH_4+2O_2 \rightarrow CO_2+2H_2O$.

As you type in a chem box, most of the formatting work is handled automatically:

- Correct capitalisation of most element symbols, such as Ag and Cl, is automatic.
- Leading digits are treated as coefficients and are shown at full size. Numbers that follow an element or a closed parenthesis are converted to subscripts.
- The equals "=" symbol is converted to a yields "→" symbol.

Notes:

Equations in a chem box cannot be evaluated or balanced.

Element capitalisation may not work in every situation. For example, to enter carbon dioxide, CO₂, you must manually capitalise the O. Otherwise, typing "co" would result in "Co", the symbol for cobalt.

Entering a chemical equation

- In the Notes work area, position the cursor where you want the equation.
- 2. From the Insert menu, select Chem Box.

Press Ctrl + E (Mac[®]: Press \mathcal{H} + E).

An empty chemical equation box is displayed.



3. Type the equation in the box. For example, to represent sulphuric acid, type h2sO4, capitalising the O manually.

The chem box automatically formats the text as you type:

4. If you need superscripts for ionic equations, type a caret symbol (^) and then the text.

5. Use parentheses to indicate whether a compound is solid (s), liquid (l), gas (g), or aqueous (aq).

6. To exit the chem box, click anywhere outside it.

Deactivating Maths Expression Boxes

Calculations are by default activated, which means that results automatically update when you evaluate or approximate an expression. If you don't want results to automatically update, you can deactivate a maths expression box, group of boxes or the entire application.

Deactivating a Box or a Group of Boxes

To deactivate a box or a group of boxes:

- 1. Select the box or boxes that you want to deactivate.
- 2. Deactivate the selected box or boxes:
 - Windows®: Click Actions > Deactivate (or right-click and then click Actions > Deactivate).
 - Mac®: Click Actions > Deactivate (or \mathcal{H} + click and then click Actions > Deactivate).

Handheld: Press menu to open the Notes menu. From the Actions menu, select
Deactivate.

Note: You can manually update a deactivated box or boxes by selecting the box or boxes and using the process described in *Evaluating and Approximating Maths Expressions*.

Deactivating All Boxes in the Notes Application

To deactivate all boxes in the Notes application:

- With a document open, place your cursor in the Notes application that you want to deactivate and select Deactivate All.
 - Windows®: Click Actions > Deactivate All or right-click and click Actions > Deactivate All.
 - Mac[®]: Click Actions > Deactivate or \mathcal{H} + click and click Actions > Deactivate.
 - Handheld: Press menu to display the Notes menu. On the Actions menu, click
 Deactivate.

Note: When you use this option in Q&A and Proof templates, Deactivate All deactivates only the maths boxes in the current work area.

Changing the Attributes of Maths Expression Boxes

You can change attributes in one or more maths expression boxes at the same time. Controlling the attributes in maths expression boxes allows you to do the following:

- Show or hide the input or output or prevent calculation in the box.
- Select a symbol separator using Insert Symbol.
- Choose the number of digits to display in the output of a maths expression.
- Select angle settings so you can use both radian/degree and gradian angle measures in the same Notes application.
- Select whether to allow maths expressions to wrap.
- Select whether to show or hide warning indicators.

To change the attributes of one or more boxes, do the following:

- 1. Select the box or boxes that you want to change.
- 2. On the Maths Box Options menu, click Maths Box Attributes.
- 3. Use the menus or selection boxes to make your selections.
- 4. Click **OK** to save or **Cancel** to abandon the change.

Note: Maths expression boxes recalculate automatically after you have made attribute changes and saved the changes.

Undoing Changes to Maths Expression Boxes

To undo changes you have made to a maths expression box, click ctrl **Z**.

Using Calculations in Notes

In the Notes application, the options on the Calculations menu enable you to perform calculations. The calculations are described in the following table.

Important Information to Know

- Notes does not support editing programmes. Use Programme Editor instead.
- Notes does not support executing Lock or Unlock commands. Use Calculator instead.
- Notes does not display intermediate results obtained via "Disp" command. Use Calculator instead.
- Notes does not support user-defined dialogue boxes obtained via "Request," "RequestStr," or "Text" commands. Use Calculator instead.
- Notes does not support the execution of multiple statistics commands that produce stat. variables.

Menu Name	Menu Option	Function
∫∑ 6: Calculations		
	1: Define Variables	Define a variable in a Note using the Calculator application.
	¹ ⁄ ₂ *.5 2: Number	Use tools from the Calculator Number menu, including Convert to Decimal, Approximate to Fraction, Factorise, Least Common Multiple, Highest Common Factor, Remainder, Fraction Tools, Number Tools and Complex-Number Tools.
	X= 3: Algebra	Use tools from the Calculator Algebra menu, including Numerical Solve, Solve System of Linear Equations, Polynomial Tools.
	∫⊿ 4: Calculus	Use tools from the Calculus menu including Numerical Derivative at a Point, Numerical Definite Integral, Sum, Product, Numerical Function Minimum and Numerical Function Maximum.
	X= 3 (CAS): Algebra	Use tools from the Calculator Algebra menu, including Solve, Factorise, Expand, Zeroes, Numerical Solve, Solve System of Equations, Polynomial Tools, Fraction Tools, Convert Expressions, Trigonometry, Complex and Extract.
	∫d 4	Use tools from the Calculus menu including Derivative, Derivative at a Point, Integral, Limit, Sum, Product, Function

Menu Name	Menu Option	Function
	(CAS): Calculus	Minimum, Function Maximum, Tangent Line, Normal Line, Arc Length, Series, Differential Equation Solver, Implicit Differentiation and Numerical Calculations
	5: Probability	Use tools from the Calculator Probability menu, including Factorial, Permutations, Combinations, Random and Distributions.
	$\overline{\mathbf{X}}_{6:}$ Statistics	Use tools from the Calculator Statistics menu, including Stats Calculations, Stats Results, List Maths, List Operations and others.
	7: Matrix & Vector	Use tools from the Calculator Matrix & Vector menu, including Create, Transpose, Determinant, Row-Echelon Form, Reduced Row-Echelon Form, Simultaneous, and others.
	^{\$} € 8: Finance	Use tools from the Calculator Finance menu, including Finance Solver, TVM Functions, Amortization, Cash Flows, Interest Conversions and Days between Dates.


Note: For more information, see the *Calculator* documentation.

Exploring Notes with Examples

This section shows you how the Notes application works with other applications to automatically update results.


Example #1: Using Notes to Explore Roots of a Quadratic Function

- 1. Open a new document and start the Notes application.
- 2. Define a function in a maths box, evaluate, and hide the output using the Maths Box attributes.

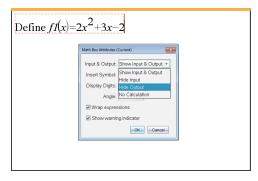


- 3. Type some more text; for example: "Real Roots of f1(x) are:"
- 4. In a new maths box, type: polyRoots(f1(x),x).

- 5. Press enter and hide the input of this maths box by using the Maths Box attributes dialogue box.
- 6. Use the Page Layout toolbar icon to select the split layout.

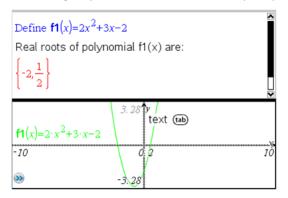

7. Add the Graph application and plot f1(x).

See how the roots of f1 change when the function is modified in Graph.

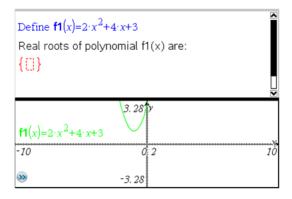

Example #2: Using Notes to Explore Data Sampling


In this example, we create a sampling distribution of sample means drawn from a given population. We will be able to watch the sampling distribution take shape for a given sample size and describe its characteristics. You can change the population and the sample size.

- 1. Set up the population and the sample size.
 - a) Type "Create sample data:"
 - b) Insert a maths expression box and define the population. For example, type "population:=seq(n,n,1,50)".


- c) Press enter and hide the output using the Maths Expression Box Attributes dialogue box.
- d) Insert a maths expression box and define the sample size. For example, type "size:=5".
- e) Press enter and hide the output using the Maths Expression Box Attributes dialogue box.

2. Set up the initialization.

- a) Type "Start taking samples:"
- b) Insert a maths expression box and set the initial values for the number of samples (num) and the list of sample means (sampmeans). Type:
 - "num:=0:sampmeans:={}"
- c) Press enter and hide the output using the Maths Expression Box Attributes dialogue box.
- d) Deactivate the maths expression box using Actions > Deactivate. The deactivation will prevent the content of that maths box from being overwritten when the values for num and sampmeans change. The deactivated maths box will be shown with the light colour background.
- 3. Set up Data & Statistics for the sampling.
 - a) Change the page layout and insert Data & Statistics.
 - b) Click on the horizontal axis and add sampmeans list.
 - c) Change the window setting: XMins=1 and XMax = 50.
 - d) You can also set up the plot of the mean of sample means using Analyse > Plot Value.

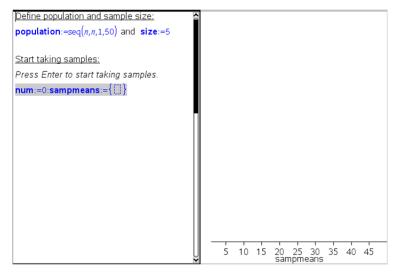


- 4. Enter the instructions to add data.
 - a) Type "Create new samples:"
 - b) Insert a maths expression to define the sample (sample) and update the number of samples and the list of sample means. Type:
 - "num:=num+1:sample:=randsamp(population,size): sampmeans:=augment(sampmeans,{mean(sample)})"
 - c) Press [enter], hide the output, and turn off the expression wrapping using the Maths Expression Box Attributes dialogue box.
 - d) Deactivate the maths expression box using Actions > Deactivate to prevent the content of the maths box to be overwritten when num and sampmeans values are reinitialized.
 - e) Create maths expression boxes that display the current number of experiments (num), sample (sample) and the list of sample means (sampmeans).

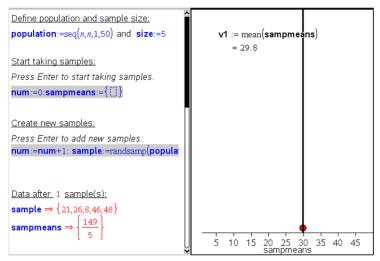


Now you are ready to explore. Add more samples by simply pressing enter when you are in the maths expression box in the "Create new samples" section.

Note: You can also automate the sampling process by using a For ... EndFor loop.

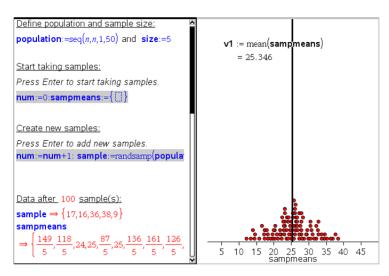

You can also change the sample size and restart the sampling.

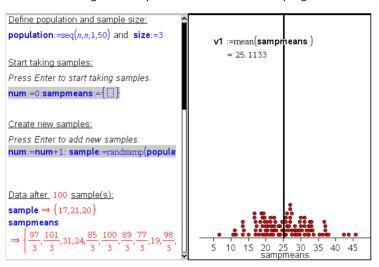

Data Collection

The Vernier DataQuest™ application is built into the TI-Nspire™ software and the operating system (OS) for handhelds. The application lets you:

- Capture, view, and analyse real-world data using a TI-Nspire™ CX II handheld, a Windows® computer, or a Mac® computer.
- Collect data from up to five connected sensors (three analogue and two digital) using the TI-Nspire™ Lab Cradle.

Important: The TI-Nspire™ CM-C Handheld is not compatible with the Lab Cradle and only supports the use of a single sensor at a time.

- Collect data either in the classroom or at remote locations using collection modes such as time-based or event-based.
- Collect several data runs for comparison.
- Create a graphical hypothesis using the Draw Prediction feature.
- Play back the data set to compare the outcome to the hypothesis.
- Analyse data using functions such as interpolation, tangential rate or modelling.
- Send collected data to other TI-Nspire[™] applications.
- Access sensor data from all connected sensor probes through your TI-Basic program.

Adding a Vernier DataQuest™ Page

Note: The application is launched automatically when you connect a sensor.

Starting a new document or problem for each new experiment ensures that the Vernier DataQuest™ application is set to its default values.

To start a new document containing a data collection page:


From the main File menu, click New Document, and then click Add Vernier DataQuest™.

Handheld: Press 🗗 on, and select Vernier DataQuest™ 🔠.

To insert a new problem with a data collection page into an existing document:

From the toolbar, click Insert > Problem>Vernier DataQuest™.

Handheld: Press doc and select Insert > Problem > Vernier DataQuest™.

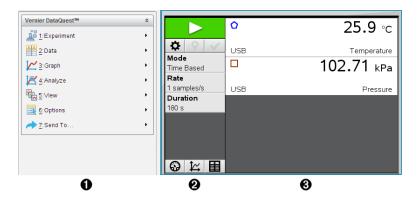

- Vernier DataQuest™ Menu. Contains menu items for set-up, collection and analysis of sensor data.
- ② Details view. Contains buttons for starting data collection ► , changing collection settings ♣, marking collected data ♀, storing data sets ✔, and tabs for managing multiple data runs.

View selection buttons let you choose from Meter view

☐, Graph view
☐, or Table view ☐.

Data work area. The information displayed here depends on the view.

Meter. Displays a list of sensors that are currently connected or set up in advance.

Graph. Displays collected data in a graphical representation, or displays the prediction before a data collection run.

Table. Displays collected data in columns and rows.

What You Must Know

Basic Steps in Performing an Experiment

These basic steps are the same no matter which type of experiment you perform.

- 1. Start the Vernier DataQuest™ Application.
- 2. Connect sensors.
- Modify sensor settings.
- 4. Select the collection mode and collection parameters.
- Collect data.
- 6. Stop collecting data.
- 7. Store the data set.
- 8. Save the document to save all data sets in the experiment.
- 9. Analyse the data.

Sending Collected Data to Other TI-Nspire™ Applications

You can send collected data to the Graphs, Lists & Spreadsheet, and Data & Statistics applications.

From the **Send To** menu, click the name of the application.

A new page showing the data is added to the current problem.

About Collection Devices

You can select from a variety of sensors and interfaces to collect data while running the Vernier DataQuest™ application with TI-Nspire™ software.

Multi-Channel Sensor Interfaces

Multi-channel sensor interfaces let you connect more than one sensor at a time.

Sensor Interface

Description



This sensor can be used with a handheld, a computer, or as a stand-alone sensor.

The sensor interface allows you to connect and use one to five sensors at the same time. It can be used in the lab or at a remote collection location.

The Lab Cradle supports two digital sensors and three analogue sensors.

The Lab Cradle also supports high-sample data collection sensors, such as a hand-grip heart rate or a blood pressure monitor.

After using the Lab Cradle as a remote sensor, you can download data to either a handheld or computer.

Texas Instruments TI-Nspire™ Lab Cradle

Single-Channel Sensor Interfaces

Single-channel sensor interfaces can only connect to one sensor at a time. These sensors have either a mini-USB connector for a handheld or a standard USB connector for a computer. For a complete list of compatible sensors, see Compatible Sensors.

Sensor Interface

Vernier EasyLink®

Description



This sensor interface is used with handhelds. It has a mini-USB connector so it can be plugged directly into the handheld.

Connect sensors to Vernier EasyLink® to:

- Measure barometric pressure.
- Measure the salinity of a solution.
- Investigate the relationship between pressure and volume (Boyles' Law).



This sensor interface is used with computers. It has a standard connector so it can be plugged into a Windows® or Mac® computer.

Connect sensors to Vernier GoLink® to:

- Measure the acidity or alkalinity of a solution.
- Monitor greenhouse gases.
- Measure sound level in decibels.

Vernier Go!Link®

Types of Sensors

- Analogue sensors. Temperature, light, pH and voltage sensors are analogue sensors and require a sensor interface.
- Digital sensors. Photogates, radiation monitors and drop counters are digital sensors. These sensors can only be used with the TI-Nspire™ Lab Cradle.
- Direct-connect USB sensors. These sensors connect directly to a handheld or computer and do not require a sensor interface.

Sensors for Handhelds

The following lists some sensors you can use with a handheld.

Sensor

Texas Instruments

Description

This analogue sensor connects directly to TI-Nspire™ CX II handhelds through the mini-USB port. It is used to explore and graph motion.

This sensor automatically launches the Vernier DataQuest™ application when you connect it to a handheld. Data collection begins when you select the Motion Match function.

This sensor collects up to 200 samples per second.

Use this sensor to:

- Measure position and speed of a person or object.
- Measure the acceleration of an object.

CBR 2™



This analogue sensor connects directly to TI-Nspire™ CX II handhelds through the mini-USB port and is used to collect temperature ranges. You can design experiments to:

- Collect weather data.
- Record temperature changes due to chemical reactions.
- Perform heat fusion studies.

Vernier EasyTemp® temperature sensor

Sensors for Computers

The following table lists some sensors you can use with a computer.

Sensor




Vernier Go!Temp® temperature sensor

Description

This analogue sensor connects to the computer's USB port and is used to collect temperature ranges.

You can use this sensor to:

- Collect weather data.
- Record temperature changes due to chemical reactions.
- Perform heat fusion studies.



Use this sensor to:

- Measure position and speed of a person or object.
- Measure the acceleration of an object.



Vernier Go!Motion® motion detector

Compatible Sensors

The following sensors can be used with the Vernier DataQuest™ application.

- 25-g Accelerometer
- 30-Volt Voltage Probe

- 3-Axis Accelerometer
- Low-g Accelerometer
- CBR 2[™] Connects directly to handheld USB port
- Go!Motion® Connects directly to computer USB port
- Extra Long Temperature Probe
- Stainless Steel Temperature Probe
- Surface Temperature Sensor
- Ammonium Ion-Selective Electrode
- Anemometer
- Barometer
- **Blood Pressure Sensor**
- CO2 Gas Sensor
- Calcium Ion-Selective Electrode
- Charge Sensor
- Chloride Ion-Selective Electrode
- Colorimeter
- Conductivity Probe
- High Current Sensor
- **Current Probe**
- Differential Voltage Probe
- Digital Radiation Monitor
- Dissolved Oxygen Sensor
- Dual-Range Force Sensor
- EasyTemp® Connects directly to handheld USB port
- **EKG Sensor**
- Electrode Amplifier
- Flow Rate Sensor
- Force Plate
- Gas Pressure Sensor
- Go!Temp® Connects directly to computer USB port
- Hand Dynamometer
- Hand-Grip Heart Rate Monitor
- Instrumentation Amplifier
- **Light Sensor**
- Magnetic Field Sensor

- Melt Station
- Microphone
- Nitrate Ion-Selective Electrode
- O2 Gas Sensor
- **ORP Sensor**
- pH Sensor
- Relative Humidity Sensor
- Respiration Monitor Belt (Requires Gas Pressure Sensor)
- Rotary Motion Sensor
- Salinity Sensor
- Soil Moisture Sensor
- Sound Level Meter
- Spirometer
- **Thermocouple**
- TI-Light Sold only with the CBL 2™
- TI-Temp Sold only with the CBL 2™
- TI-Voltage Sold only with the CBL 2™
- Tris-Compatible Flat pH Sensor
- **Turbidity Sensor**
- **UVA Sensor**
- **UVB Sensor**
- Vernier Constant Current System
- Vernier Drop Counter
- Vernier Infrared Thermometer
- Vernier Motion Detector
- Vernier Photogate
- Voltage Probe
- Wide-Range Temperature Probe

Connecting Sensors

Direct-connect USB sensors, such as the Vernier Go!Temp® temperature sensor (for computers) or the Vernier EasyLink® temperature sensor (for handhelds), connect directly to the computer or handheld and do not need a sensor interface.

Other sensors require a sensor interface such as the TI-Nspire™ Lab Cradle.

Connecting Directly

Attach the cable on the sensor directly to the computer's USB port or to an appropriate port on the handheld.

Connecting through a Sensor Interface

- Attach the sensor to the sensor interface using either the mini-USB. USB or BT. connector and the appropriate cable.
- 2. Attach the interface to a computer or handheld using the appropriate connector and cable.

Note: To attach a handheld to a TI-Nspire™ Lab Cradle, slide the handheld into the connector at the bottom of the Lab Cradle.


Setting Up an Offline Sensor

You can pre-define meter settings for a sensor that is not currently attached to a computer or handheld.

You cannot use the sensor offline, but you can prepare the experiment for it and then attach it when ready to collect the data. This option makes it faster to share a sensor during a lesson or lab in which there are not enough sensors for everyone.

1. From the Experiment menu, select Advanced Set Up > Configure Sensor > Add Offline Sensor.

The Select Sensor dialogue box opens.

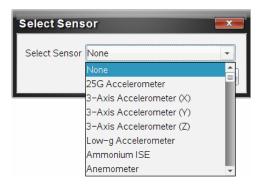

- 2. Select a sensor from the list.
- 3. Click the Meter View tab 🔞.
- 4. Click the sensor you have added, and modify its settings.

The settings will be applied when you attach the sensor.

Removing an offline sensor

- 1. From the Experiment menu, select Advanced Setup > Configure Sensor.
- 2. Select the name of the offline sensor to remove.

3. Click Remove.

Modifying Sensor Settings


You can modify how the sensor values are displayed and stored. For example, when using a temperature sensor, you can change the unit of measure from Centigrade to Fahrenheit.

Changing Sensor Measurement Units

Measurement units depend on the selected sensor. For example, units for the Vernier Go!Temp® Temperature sensor are Fahrenheit, Celsius and Kelvin. Units for the Vernier Hand Dynamometer (a specialised force sensor) are Newton, Pound and Kilogramme.

You can change the units before or after you collect data. The collected data reflects the new measurement unit.

- 1. Click Meter view to display the connected and offline sensors.
- Click the sensor whose units you want to change.
- In the Meter Settings dialogue box, select the unit type from the Measurement Units menu.

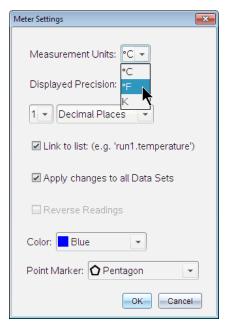

Calibrating a Sensor

When the software or handheld detects a sensor, the calibration for that sensor automatically loads. You can calibrate some sensors manually. Other sensors, such as the Colorimeter and the Dissolved Oxygen Sensor, must be calibrated to provide useful data.

There are three options for calibrating a sensor:

- Manual Entry
- Two Point
- Single Point

Refer to the sensor's documentation for specific calibration values and procedures.

Setting a Sensor to Zero

You can set the standing value of some sensors to zero. You cannot set sensors in which relative measurements such as force, motion and pressure are common to zero. Sensors designed to measure specific environmental conditions, such as Temperature, pH and CO₂ also cannot be set to zero.

- 1. Click Meter view to display the connected and offline sensors.
- Click the sensor that you want to set to zero.
- 3. In the Meter Settings dialogue box, click **Zero**.

Reversing a Sensor's Readings

By default, pulling with a force sensor produces a positive force and pushing produces a negative force. Reversing the sensor allows you to display pushing as a positive force.

- 1. Click Meter view (to display the connected and offline sensors.
- Click the sensor that you want to reverse.
- In the Meter Settings dialogue box, click Reverse Readings.

The sensor display is now reversed. In Meter View, the reverse indicator appears after the sensor name.



Collecting Data

Collecting Time-Based Data

The Time Based collection mode captures sensor data automatically at regular time intervals.

Connect the sensor or sensors.

Sensor names are added to the sensor list automatically.

From the Experiment menu, select New Experiment.

This removes all data and restores all meter settings to their defaults.

- From the Experiment menu, select Collection Mode > Time Based.
 - a) Select Rate or Interval from the drop-down list, and then type the Rate (samples/second) or Interval (seconds/sample).
 - b) Type the **Duration** of the collection.

The Number of points is calculated and displayed, based on rate and duration. Note that collecting too many data points can slow system performance.

- c) Select Strip Chart if you want to collect samples continuously, retaining only the last n samples. (where "n" is the number shown in the Number of points field.)
- Modify sensor settings as necessary.
- Click Start Collection 5.
- After the data has been collected, click **Stop Collection** .

The data set run is complete.

Collecting Selected Events

Use the Selected Events collection mode to capture samples manually. In this mode, each sample is automatically assigned an event number.

1. Connect the sensor or sensors.

Sensor names are added to the sensor list automatically.

2. From the Experiment menu, select New Experiment.

This removes all data and restores all meter settings to their defaults.

From the Experiment menu, select Collection Mode > Selected Events.

The Selected Events Set-up dialogue box opens.

- Name. This text is visible in the Meter View. Its first letter is displayed as the independent variable in the Graph view.
- **Units**. This text is displayed in Graph view alongside the Name.
- Average over 10 s. This option averages ten seconds of data for each point.
- Modify sensor settings as necessary.
- 5. Click Start Collection .

The Keep Current Reading icon **o** becomes active. The current sensor value appears in the centre of the graph.

6. Click **Keep Current Reading** to capture each sample.

The data point is plotted, and the current sensor value appears in the centre of the graph.

Note: If you selected the Averaging option, a countdown timer appears. When the counter reaches zero, the system plots the average.

- 7. Continue capturing until you collect all of the desired data points.
- 8. Click Stop Collection

The data set run is complete.

Collecting Events with Entry

Use the Events with Entry collection mode to capture samples manually. In this mode, you define the independent value for each point you collect.

Connect the sensor or sensors.

Sensor names are added to the sensor list automatically.

2. From the Experiment menu, select New Experiment.

This removes all data and restores all meter settings to their defaults.

From the Experiment menu, select Collection Mode > Events with Entry.

The Events with Entry Set-up dialogue box opens.

- Name. This text is visible in the Meter View. Its first letter is displayed as the independent variable in the Graph view.
- Units. This text is displayed in Graph view alongside the Name.
- Average over 10 s. This option averages ten seconds of data for each point.
- 4. Modify sensor settings as necessary.
- 5. Click Start Collection .

The Keep Current Reading icon **o** becomes active. The current sensor value appears in the centre of the graph.

Click **Keep Current Reading** to capture a sample.

The Events with Entry dialogue box opens.



- 7. Type a value for the independent variable.
- Click OK. 8.

The data point is plotted, and the current sensor value appears in the centre of the graph.

Note: If you selected the Averaging option, a countdown timer appears. When the counter reaches zero, the system plots the average.

- 9. Repeat steps 6 to 8 until you collect all of the desired data points.

The data set run is complete.

Collecting Photogate Timing Data

The Photogate Timing collection mode is available only when using the Vernier Photogate sensor. This sensor can time objects that pass through the gates or objects that pass outside of the gates.

1. Connect the Photogate sensor or sensors.

Sensor names are added to the sensor list automatically.

2. From the Experiment menu, select New Experiment.

This removes all data and restores all meter settings to their defaults.

- From the Experiment menu, select Collection Mode > Photogate Timing.
- 4. Set the collection options.
- 5. Modify sensor settings as necessary.
- 6. Click Start Collection

The data set run is complete.

Collecting Drop Counter Data

The Drop Counting collection mode is available only when using the Vernier Drop Counter optical sensor. This sensor can count the number of drops or record the amount of liquid added during an experiment.

1. Connect the Drop Counter sensor or sensors.

Sensor names are added to the sensor list automatically.

2. From the Experiment menu, select New Experiment.


This removes all data and restores all meter settings to their defaults.

- From the Experiment menu, select Collection Mode > Drop Counting.
- Set the collection options.
- 5. Modify sensor settings as necessary.
- Click Start Collection

The data set run is complete.

Using Data Markers to Annotate Data

Data markers give you a way to emphasise specific data points, such as when you change a condition. For example, you might mark a point at which a chemical is added to a solution or when heat is applied or removed. You can add a marker with or without a comment, and you can hide a comment.

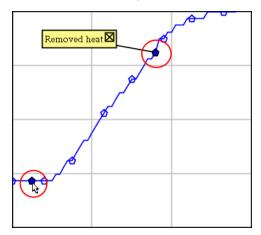

Two data markers, one with a comment displayed

100	1.0	20.4
5	2.0	28.4
6	2.5	28.4
7	30	38.4
8	Appn	ed heat
9	4.0	28.4
10	4.5	28.4
11	5.0	28.4
12	5.5	28.5

Marker shown as red triangle in Table view

Adding a Marker During Data Collection

Click **Add Data Marker** • to place a marker at the current data point.

Adding a Marker After Collecting Data

- 1. In Graph or Table view, click the point at which you want a marker.
- 2. Click Add Data Marker Q.




3. Complete the items in the dialogue box.

Adding a Comment to an Existing Marker

1. In the Detail view, click to expand the list of markers for the data set.



2. Click the entry for the marker that you want to change, and complete the items in the dialogue box.



Repositioning a Data Marker

1. Click to expand the list of markers in the Detail view.



- 2. Click the entry for the marker that you want to change.
- In the dialogue box, type a new value for Mark Value at.

Moving a Data Marker's Comment in the Graph View

Drag the comment to move it. The connecting line remains attached to the data point.

Hiding/Showing a Data Marker's Comment

- Hide a comment by clicking the **X** at the end of the comment.
- To restore a hidden comment:
 - a) Click to expand the list of markers in the Detail view.



b) Click the entry for the marker that you want to change, and tick Show Comment on Graph.

Removing a Data Marker

1. Click to expand the list of markers in the Detail view.



2. In the dialogue box, click Remove.

Collecting Data Using a Remote Collection Unit


To collect information from a sensor while it is disconnected, you can set it up as a remote sensor. Only the TI-Nspire™ Lab Cradle, TI CBR 2™, and Vernier Go!Motion® support remote data collection.

You can set up a remote collection unit to start collecting:

- When you press a manual trigger on the unit, as on the TI-Nspire™ Lab Cradle
- When a delay countdown expires on a unit that supports a delayed start

Setting Up for Remote Collection

- Save and close any open documents, and start with a new document.
- 2. Connect the remote collection unit to the computer or handheld.
- 3. Modify the sensor settings.
- 4. Click the Collection Setup button .
- On the Collection Setup screen, click **Enable Remote Collection**. 5.
- Select the remote collection unit from the **Devices** list.
- 7. Specify the method for starting the collection:
 - To start automatically after a specified delay (on supported units), type the delay value.
 - To start when you press the manual trigger (on supported units), type a delay value of **0**. When you use a delay, the manual trigger button on the TI-Nspire™ Lab Cradle has no effect on the start of the collection.

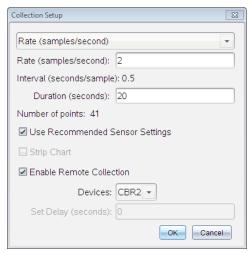

8. Click OK.

A message confirms that the unit is ready.



Disconnect the unit.

Depending on the device, LED lights may indicate its status.

Red. The system is not ready.

Amber. The system is ready but not collecting data.

Green. The system is collecting data.

10. If you are starting collection manually, press the trigger when ready. If you are starting based on a delay, the collection will start automatically when the countdown is complete.

Retrieving the Remote Data

After collecting data remotely, you transfer it to the computer or handheld for analysis.

- Open the Vernier DataQuest™ application.
- 2. Attach the TI-Nspire™ Lab Cradle to the handheld or computer.

The Remote Data Detected dialogue box opens.



3. Click Import.

The data transfers to the Vernier DataQuest™ application.


Setting Up the Sensor for Triggering

To start data collection based on a specific sensor reading, the TI-Nspire™ Lab Cradle and sensor must be connected.

Connect the sensor.

2. Click Experiment > Advanced Set up > Triggering > Set Up.

The Configure Trigger dialogue box opens.

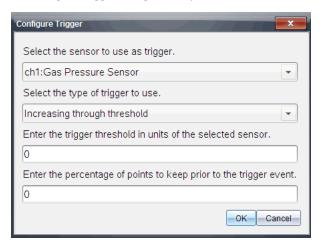

3. Select the sensor from the Select the sensor to use as trigger drop-down list.

Note: The menu displays the sensors connected to the TI-Nspire[™] Lab Cradle.

- 4. Select one of the following from the Select the type of trigger to use drop-down list.
 - **Increasing through threshold.** Use to trigger on increasing values.
 - Decreasing through threshold. Use to trigger on decreasing values.
- 5. Type the appropriate value in the Enter the trigger threshold in units of the selected sensor field.

When entering the trigger value, enter a value within the range of the sensor.


If you change the unit type after setting the threshold, the value automatically updates.

For example, if you use the Vernier Gas Pressure sensor with the units set as atm and you later change the units to kPa, the settings are updated.

- 6. Type the number of data points to keep before the trigger value occurs.
- 7. Click OK.

The trigger is now set and enabled if values were entered.

8. (Optional) Select Experiment > Advanced Set up > Triggering to verify the active indicator is set to Enabled.

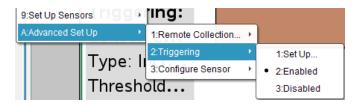

Important: When the trigger is enabled, it stays active until it is disabled or you start a new experiment.

Enabling a Disabled Trigger

If you set the trigger values in the current experiment, and then disable them, you can enable the triggers again.

To enable a trigger:

Click Experiment > Advanced Set Up > Triggering > Enable.

Disabling an Enabled Trigger

To disable the active trigger.

Click Experiment > Advanced Set Up > Triggering > Disable.

Collecting and Managing Data Sets

By default, the Start Collection button overwrites collected data with data from the next run. To preserve each run, you can store it as a data set. After collecting multiple data sets, you can superimpose any combination of them on the Graph View.

Important: Stored data sets are lost if you close the document without saving it. If you want stored data to be available later, make sure to save the document.

Storing Data as Sets

- 1. Collect the data from the first run. (See Collecting Data.)
- 2. Click the Store Data Set button <




The data is stored as run1. A new data set, run2, is created for collecting the next run.

3. Click Start Collection to collect data for run2.


Comparing Data Sets

- 1. Click the **Graph View** icon to show the graph.
- Click the Data Set Selector (near the top of the Detail View) to expand the list of data sets.

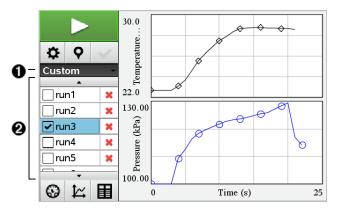

- Data Set Selector lets you expand or collapse the list.
- Expanded list shows available data sets. Scroll buttons appear as necessary to let you scroll the list.
- 3. Choose which data sets to view by selecting or clearing the tickboxes.

The graph is rescaled as necessary to show all selected data.

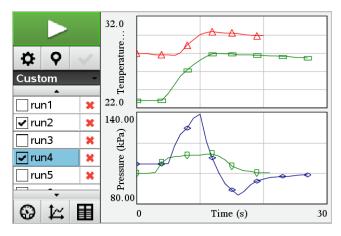

Tip: To quickly select a single data set, hold down Shift while clicking its name in the list. The graph shows only the selected set, and the list is collapsed automatically to help you view details of the data.

Renaming a Data Set

By default, data sets are named run1, run2 and so on. The name of each data set is displayed in the Table view.

- 1. Click the **Table View** icon to show the table.
- 2. Display the context menu for the table view, and select Data Set Options > [current name].




3. Type the new Name.

Note: The maximum character limit is 30. The name cannot contain commas.

4. (Optional) Type Notes about the data.

Deleting a Data Set


- Click the **Graph View** icon to show the graph.
- 2. Click the Data Set Selector (near the top of the Detail View) to expand the list of data sets.
- 3. Scroll the list as necessary, and then click the Delete symbol (X) next to the name of the data set.



4. Click **OK** on the confirmation message.

Expanding the View Details Area

Drag the boundary at the right edge of the Details area to increase or decrease its width.



Using Sensor Data in Programmes

You can access sensor data from all connected sensor probes through your TI-Basic programme by using this command:

RefreshProbeVars statusVar

You must first launch the Vernier DataQuest™ application, or you will receive an error.

Note: The Vernier DataQuest[™] application will auto-launch when you connect a sensor or a lab cradle to the TI-Nspire™ software or handheld.

- The RefreshProbeVars command will be valid only when Vernier DataQuest™ is in 'meter' mode.
- status Var is an optional parameter that indicates the status of the command. These are the status Var values:

StatusVar Value	Status
statusVar=0	Normal (continue with the programme)
statusVar=1	The Vernier DataQuest™ application is in data collection mode. Note: The Vernier DataQuest™ application must be in meter mode for this command to work.
statusVar=2	The Vernier DataQuest™ application is not launched.

StatusVar Value	Status
statusVar=3	The Vernier DataQuest™ application is launched, but you have not connected any probes.
	Note: The RefreshProbeVars command will almost always return <i>statusVar</i> =3 in the iOS, even if you have already launched the Vernier DataQuest™ application

- Your TI-Basic programme will read directly from Vernier DataQuest™ variables in the symbol table.
- The meter time variable shows the last value of the variable; it does not update automatically. If no data collection has occurred, meter.time will be 0 (zero).
- Use of variable names without corresponding probes being physically attached will result in a "Variable not defined" error.
- The RefreshProbeVars command will be a NOP (null command) on iOS.

Collecting Sensor Data using RefreshProbeVars

- 1. Launch the Vernier DataQuest™ application.
- 2. Connect the sensor(s) you need to collect the data.
- Run the programme you wish to use to collect data in the calculator application.
- Manipulate the sensors and collect the data.

Note: You may create a programme to interact with the TI-Innovator™ Hub using menu> Hub > Send. (See Example 2, below.) This is optional.

Example 1

```
Define temp()=
Pram
© Check if system is ready
RefreshProbeVars status
If status=0 Then
Disp "ready"
For n, 1, 50
RefreshProbeVars status
temperature:=meter.temperature
Disp "Temperature: ", temperature
If temperature>30 Then
Disp "Too hot"
EndIf
© Wait for 1 second between samples
Wait 1
EndFor
Else
Disp "Not ready. Try again later"
EndIf
EndPram
```

Example 2- with TI-Innovator™ Hub

```
Define tempwithhub() =
Pram
© Check if system is ready
RefreshProbeVars status
If status=0 Then
Disp "ready"
For n, 1, 50
RefreshProbeVars status
temperature:=meter.temperature
Disp "Temperature: ", temperature
If temperature>30 Then
Disp "Too hot"
© Play a tone on the Hub
Send "SET SOUND 440 TIME 2"
EndIf
© Wait for 1 second between samples
Wait 1
EndFor
Else
Disp "Not ready. Try again later"
EndIf
EndPrgm
```

Analysing Collected Data

In the Vernier DataQuest™ application, use Graph View to analyse data. Start by setting up graphs, and then use analysis tools such as integral, statistics and curve fit to investigate the mathematical nature of the data.

Important: The Graph menu and Analyse menu items are only available when working in Graph View.

Finding the Area Under a Data Plot

Use Integral to determine the area under a data plot. You can find the area under all of the data or a selected region of the data.

To find the area under a data plot:

- Leave the graph unselected to examine all the data, or select a range to examine a specific area.
- 2. Click Analyse > Integral.
- 3. Select the plotted column name if you have more than a single column.

The data plot area is displayed in the View Details area.

Finding the Slope

Tangent displays a measure of the rate at which the data is changing at the point you are examining. The value is labelled "Slope".

To find the slope:

1. Click Analyse > Tangent.

A check mark appears in the menu next to the option.

2. Click the graph.

The examine indicator is drawn to the nearest data point.

The values of the plotted data are shown in the View details area and the All Details for Graph dialogue box.

You can move the examine line by dragging, clicking another point or using the arrow keys.

Interpolating the Value Between Two Data Points

Use Interpolate to estimate the value between two data points and to determine the value of a Curve Fit between and beyond these data points.

The examine line moves from data point to data point. When Interpolate is on, the examine line moves between and beyond data points.

To use Interpolate:

1. Click Analyse > Interpolate.

A check mark appears in the menu next to the option.

2. Click the graph.

The examine indicator is drawn to the nearest data point.

The values of the plotted data are shown in the View Details area.

You can shift the examine line by moving the cursor with the arrow keys or by clicking on another data point.

Generating Statistics

You can generate statistics (minimum, maximum, mean, standard deviation and number of samples) for all the collected data or for a selected region. You can also generate a curve fit based on one of several standard models or on a model that you define.

- 1. Leave the graph unselected to examine all the data, or select a range to examine a specific area.
- 2. Click Analyse > Statistics.
- 3. Select the plotted column name if you have more than a single column. For example, run1.Pressure.

The Stats dialogue box opens.



- Review the data.
- 5. Click OK.

For information on clearing the Statistics analysis, see Removing Analysis Options.


Generating a Curve Fit

Use Curve Fit to find the best curve fit to match the data. Select all of the data or a selected region of data. The curve is drawn on the graph.

- 1. Leave the graph unselected to examine all the data, or select a range to examine a specific area.
- 2. Click Analyse > Curve Fit.
- 3. Select a curve fit option.

Curve Fit option	Calculated in the form:
Linear	y = m*x + b
Quadratic	$y = a*x^2 + b*x + c$
Cubic	$y = a*x^3 + b*x^2 + c*x + d$
Quartic	$y = a*x^4 + b*x^3 + c*x^2 + d*x + e$
Power (ax^b)	y = a*x^b
Exponential (ab^x)	y = a*b^x
Logarithmic	y = a + b*In(x)
Sinusoidal	y = a*sin(b*x + c) + d
Logistic (d ≠ 0)	$y = c/(1 + a*e^{-(-bx)}) + d$
Natural Exponential	y = a*e^(-c*x)
Proportional	y = a*x

The Fit Linear dialogue box opens.



- 4. Click OK.
- 5. Review the data.

For information on clearing the Curve Fit analysis, see *Removing Analysis Options*.

Plotting a Standard or User-Defined Model


This option provides a manual method for plotting a function to fit data. Use one of the predefined models or enter your own.

You can also set the spin increment to use in the View Details dialogue box. Spin increment is the value by which the coefficient changes when you click the spin buttons in the View Details dialogue box.

For example, if you set m1=1 as the spin increment, when you click the up spin button the value changes to 1.1, 1.2, 1.3 and so on. If you click the down spin button, the value changes to 0.9, 0.8, 0.7 and so on.

1. Click Analyse > Model.

The Model dialogue box opens.




2. Type your own function.

-or-

Click to select a value from the drop-down list.

3. Click OK.

The Set Coefficient Values dialogue box opens.

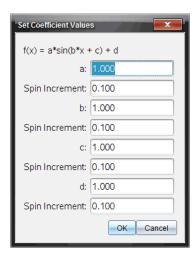

- 4. Type the value for the variables.
- 5. Type the change in value in the Spin Increment fields.
- 6. Click OK.

Note: These values are the initial values. You can also adjust these values in the View Details area.

The model is shown on the graph with adjustment options in the View Details area and in the All Details for Graph dialogue box.

7. (Optional) Adjust the window setting for minimum and maximum axis values. For more information, see Setting the Axis for One Graph.

For information on clearing the Model analysis, see *Removing Analysis Options*.

8. Click to make any desired adjustments to the coefficients.

-or-

Click the value in the View Details area.

This graphic is an example of a model with adjusted values.

Removing Analysis Options

- 1. Click Analyse > Remove.
- Select the data display you want to remove.

The display you selected is removed from the graph and the View Details area.

Displaying Collected Data in Graph View

When you collect data, it is written in both the Graph and Table views. Use the Graph view to examine the plotted data.

Important: The Graph menu and Analyse menu items are only active when working in Graph View.

Selecting the Graph View

Click the **Graph View** tab 🔼.

Viewing Multiple Graphs

Use the Show Graph menu to show separate graphs when using:

- A sensor that plots more than one column of data.
- Multiple sensors with different defined units at the same time.

In this example, two sensors (the Gas Pressure sensor and the Hand Dynamometer) were used in the same run. The following image shows the columns Time, Force and Pressure in the Table view to illustrate why two graphs are shown.

Displaying One of Two Graphs

When two graphs are displayed, the top graph is Graph 1 and the bottom graph is Graph 2.

To display only Graph 1:

Select Graph > Show Graph > Graph 1.

Only Graph 1 is displayed.

To display only Graph 2:

Select Graph > Show Graph > Graph 2.

Only Graph 2 is displayed.

Displaying Both Graphs

To display both Graph 1 and Graph 2 together:

Select Graph > Show Graph > Both.

Graph 1 and Graph 2 are displayed.

Displaying Graphs in the Page Layout View

Use the Page layout view when Show Graph is not the appropriate solution for showing more than one graph.

The Show Graph option is not applicable for:

- Multiple runs using a single sensor.
- Two or more of the same sensors.
- Multiple sensors that use the same column(s) of data.

To use Page Layout:

- Open the original data set you want to see in two graph windows.
- Click Edit > Page Layout > Select Layout.
- Select the type of page layout you want to use. 3.
- 4. Click Click here to add an application.
- 5. Select Add Vernier DataQuest™.

The Vernier DataQuest™ application is added to the second view.

6. To see separate views, click the view you want to change, and then select View > Table.

The new view is displayed.

- 7. To show the same view, click the view to change.
- Click View > Graph.

The new view is displayed.

Displaying Collected Data in Table View

Table view provides another way to sort and view collected data.

Selecting the Table View

Click the **Table View** tab

Defining Column Options


You can name columns and define the decimal points and the precision you want to use.

1. from the Data menu, select Column Options.

Note: You can be in the Meter, Graph or Table view and still click these menu options. The results will still be visible.

2. Click the name of the column you want to define.

The Column Options dialogue box opens.

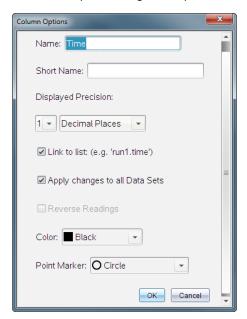

- 3. Type the long name for the column in the Name field.
- 4. Type the abbreviated name in the **Short Name** field.

Note: This name is displayed if the column cannot expand to display the full name.

- 5. Type the number of units in the Units field.
- From the **Displayed Precision** drop-down list, select the precision value.

Note: The default precision is related to the precision of the sensor.

7. Select Link to list to link to the symbol table and make this information available to other TI-Nspire™ applications.

Note: Linking is the default for most sensors.

Important: Heart rate and blood pressure sensors require a tremendous amount of data to be useful, and the default for these sensors is to be unlinked to improve system performance.

- 8. Select **Apply changes to all Data Sets** to apply these settings to all data sets.
- 9. Click OK.


The column settings are now defined with the new values.

Creating a Column of Manually Entered Values

To enter data manually, add a new column. Sensor columns cannot be modified, but data entered manually can be edited.

1. Click Data > New Manual Column.

The Column Options dialogue box opens.

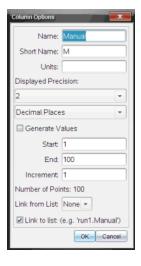

- 2. Type the long name for the column in the Name field.
- 3. Type the abbreviated name in the **Short Name** field.

Note: This name is displayed if the column cannot expand to display the full name.

- 4. Type the units to be used.
- 5. From the Displayed Precision drop-down list, select the precision value.

Note: The default precision is related to the precision of the sensor.

- 6. (Optional) Select Apply changes to all Data Sets to apply these settings to all data sets.
- 7. (Optional) Select Generate Values to automatically populate the rows.

If you select this option, complete these steps:

- a) Type a starting value in the Start field.
- b) Type an ending value in the **End** field.
- c) Type the increase in value in the Increment field.

The number of points is calculated and shown in the Number of Points field.

Select Link from list to link to data in another TI-Nspire[™] application.

Note: This list only populates when data exists in the other application and includes a column label.

9. Select Link to list to link to the symbol table and make this information available to other TI-Nspire[™] applications.

Note: Linking is the default for most sensors.

Important: Heart rate and blood pressure sensors require a tremendous amount of data to be useful, and the default for these sensors is to be unlinked to improve system performance.

10. Click **OK**.

A new column is added to the table. This column can be edited.


Creating a Column of Calculated Values

You can add an additional column to the data set in which the values are calculated from an expression using at least one of the existing columns.

Use a calculated column when finding the derivative for pH data. For more information, see Adjusting Derivative Settings.

1. Click Data > New Calculated Column.

The Column Options dialogue box opens.

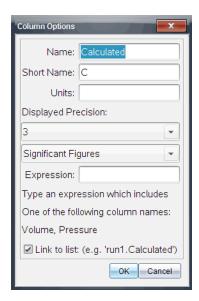

- 2. Type the long name for the column in the Name field.
- 3. Type the abbreviated name in the **Short Name** field.

Note: This name is displayed if the column cannot expand to display the full name.

- 4. Type the units to be used.
- From the **Displayed Precision** drop-down list, select the precision value.

Note: The default precision is related to the precision of the sensor.

6. Type a calculation including one of the column names in the Expression field.

Note: The system-provided column names are dependent on the sensor(s) selected and any changes made to the name field in Column Options.

Important: The Expression field is case-sensitive. (Example: "Pressure" is not the same as "pressure".)

7. Select Link to list to link to the symbol table and make this information available to other TI-Nspire[™] applications.

Note: Linking is the default for most sensors.

Important: Heart rate and blood pressure sensors require a tremendous amount of data to be useful, and the default for these sensors is to be unlinked to improve system performance.

8. Click OK.

The new calculated column is created.

Customising the Graph of Collected Data

You can customise the Graph view by adding a title, changing colours and setting ranges for the axis.

Adding a Title

When you add a title to a graph, the title is displayed in the View Details area. When you print the graph, the title prints on the graph.

1. Click Graph > Graph Title.

The Graph Title dialogue box opens.



If there are two graphs in the work area, the dialogue box has two title options.



2. Type the name of the graph in the Title field.

-or-

- a) Type the name of the first graph in the Graph 1 field.
- b) Type the name of the second graph in the Graph 2 field.
- Select **Enable** to show the title.

Note: Use the Enable option to hide or show the graph title as needed.

4. Click OK.

The title is shown.


Setting Axis Ranges

Setting Axis Ranges for One Graph

To modify the minimum and maximum range for the x and y axis:

1. Click Graph > Window Settings.

The Window Settings dialogue box opens.



- 2. Type the new values in one or more of these fields:
 - X Min
 - X Max
 - Y Min
 - Y Max

3. Click OK.

The application uses the new values for the graph visual range until you modify the range or change data sets.

Setting Axis Ranges for Two Graphs

When working with two graphs, enter two y axis minimum and maximum values, but only one set of minimum and maximum values for the x axis.

1. Click Graph > Window Setting.

The Window Setting dialogue box opens.




- 2. Type the new values in one or more of these fields:
 - X Min
 - X Max
 - Graph 1: Y Min
 - Y Max
 - Graph 2: Y Min
 - Y Max
- 3. Click OK.

The application uses the new values for the graph visual range until you modify the range or change data sets.

Setting the Axis Range on the Graph Screen

You can modify the minimum and maximum range for the x and y axes directly on the graph screen.


Select the axis value that you want to change, and type a new value.




The graph is redrawn to reflect the change.

Selecting which Data Sets to Plot

1. In the Detail view on the left, click the tab immediately below the view selection buttons.

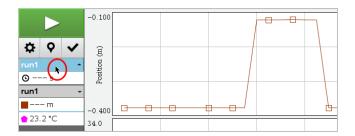

- 2. The Detail view shows a list of available data sets.
- Use the tick boxes to select the data sets to plot.

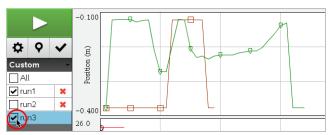

Autoscaling a Graph

Use the autoscale option to show all the points plotted. Autoscale Now is useful after you change the x and y axis range or zoom in or out of a graph. You can also define the automatic autoscale setting to use during and after a collection.

Autoscale Now Using the Application Menu

Click Graph > Autoscale Now.

The graph now displays all the points plotted.

Autoscale Now Using the Context Menu

- 1. Open the context menu in the graph area.
- 2. Click Window/Zoom > Autoscale Now.


The graph now displays all the points plotted.

Defining Autoscale During a Collection

There are two options for using the automatic autoscaling that occurs during a collection. To choose an option:

1. Click Options > Autoscale Settings.

The Autoscale Settings dialogue box opens.

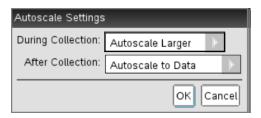

- Click ► to open the During Collection drop-down list.
- 3. Select one of these options:
 - Autoscale Larger Expands the graph as needed to show all points as you collect them.
 - Do Not Autoscale The graph is not changed during a collection.
- 4. Click **OK** to save the setting.

Defining Autoscale After a Collection

You have three options for setting the automatic autoscaling that occurs after a collection. To set your choice:

1. Click Options > Autoscale Settings.

The Autoscale Settings dialogue box opens.

- Click ► to open the After Collection drop-down list.
- 3. Select one of these options:
 - Autoscale to Data. Expands the graph to show all data points. This option is the
 default mode.
 - Autoscale From Zero. Modifies the graph so all data points including the origin point are displayed.
 - Do Not Autoscale. The graph settings are not changed.

4. Click **OK** to save the setting.

Selecting a Range of Data

Selecting a range of data on the graph is useful in several situations, such as when zooming in or out, striking and un-striking data and examining settings.

To select a range:

1. Drag across the graph.

The selected area is indicated by grey shading.

- 2. Perform one of these actions.
 - Zoom in or out
 - Strike or un-strike data
 - **Examine settings**

To deselect a range:

Press the Esc key as necessary to remove the shading and the vertical trace line.

Zooming In on a Graph

You can zoom in on a subset of the collected points. You can also zoom out from a previous zoom or expand the graph window beyond the data points collected.

To zoom in on a graph:

- 1. Select the area you want to zoom into, or use the current view.
- 2. Click Graph > Zoom In.

The graph adjusts to display only the area you selected.

The x range selected is used as the new x range. The y range autoscales to show all graphed data points in the selected range.

Zooming Out of a Graph

Select Graph > Zoom Out.

The graph is now expanded.

If a Zoom In precedes a Zoom Out, the graph displays the original settings prior to the Zoom In.

For example, if you Zoomed In twice, the first Zoom Out would display the window of the first Zoom In. To display the full graph with all data points from multiple zoom ins, use Autoscale Now.

Setting Point Options

To indicate how often marks show on the graph and whether to use a connecting line:

1. Click Options > Point Options.

The Point Options dialogue box opens.




- 2. Select a Mark option from the drop-down list.
 - None. No point protectors.
 - Regional. Periodic point protectors.
 - All. Every data point as a point protector.
- 3. Select Connect Data Points to display a line between points.

-or-


Clear Connect Data Points to remove the line between points.

The following graphics show examples of some of the Point Mark options.

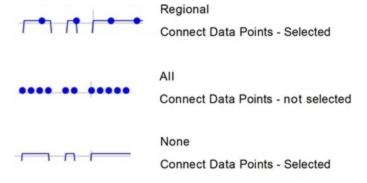

Changing a Graph's Colour

1. Click the point indicator for the graph whose colour you want to change.



In the Column Options dialogue box, select the new Colour.

Selecting Point Markers

- Right-click in the graph to open the menu.
- 2. Click Point Marker.

Note: If there is only one dependent variable column, the Point Marker option is preceded by the data set name and column name. Otherwise, the Point Marker option has a menu.

- 3. Select the column variable to change.
- 4. Select the point marker to set.

The Point Marker changes to the option selected.

Selecting an Independent Variable Column

Use the option Select X-axis Column to select the column used as the independent variable when graphing the data. This column is used for all graphs.

- Click Graph > Select X-axis Column.
- 2. Select the variable you want to change.

The x-axis label on the graph changes and the graph is reordered using the new independent variable for graphing the data.


Selecting a Dependent Variable Column

Use the option Select Y-axis Column to select which dependent variable columns to plot on the displayed graph(s).

1. Click Graph > Select Y-axis Column.

2. Select one of the following:

- A variable from the list. The list is a combination of dependent variables and the number of data sets.
- More. Selecting More opens the Select dialogue box. Use this when you want to select a combination of data set variables to graph.



Showing and Hiding Details


You can hide or show the Details view on the left side of the screen.

Click Options > Hide Details or Options > Show Details.

Showing and Hiding Axes Tick Labels

You can hide or show the axes tick labels on a graph.

Click Options > Hide tick labels or Options > Show tick labels.

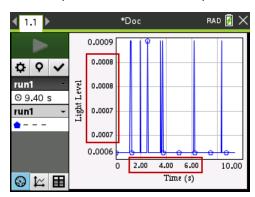

Notes:

- When a Vernier DataQuest™ application is added to a document, the tick labels will default to being displayed.
- Tick labels may not be displayed if there is a lack of available space. Minimum and maximum values will always be displayed.
- Tick labels cannot be edited, but they will recalculate as needed if the minimum or maximum values are edited or the window settings are changed.

Striking and Restoring Data

Striking data omits it temporarily from the Graph view and from the analysis tools.

- 1. Open the data run that contains the data to be struck.
- 2. Click Table View III.
- 3. Select the region by dragging from the starting row to the ending point.

The screen scrolls so you can see the selection.

- 4. Click Data > Strike Data.
- 5. Select one of the following:
 - **In Selected Region**. Strike the data from the area you selected.
 - Outside Selected Region. Strike all data except the area you selected.

The selected data is marked as struck in the table and is removed from the graph view.

Restoring Struck Data

- Select the range of data to restore or if restoring all struck data, start at step two.
- Click Data > Restore Data.
- 3. Select one of the following:
 - In Selected Region Restore data in the selected area.
 - Outside Selected Region Restore data outside the selected area.
 - All Data Restore all data. No data selection necessary.

The data is restored.

Replaying the Data Collection

Use the Replay option to playback the data collection. This option lets you:

- Select the data set you want to replay.
- Pause the playback.
- Advance the playback by one point at a time.
- Adjust the playback rate.

Repeat the playback.

Selecting the Data Set to Replay


You can replay one data set at a time. By default, the latest data set plays using the first column as the base column (example: time reference).

If you have multiple data sets, and want a different data set or base column than the default, you can select the data set to replay and the base column.

To select the data set to replay:

1. Click Experiment > Replay > Advanced Settings.

The Advanced Replay Settings dialogue box opens.



2. Select the data set to replay from the Data Set drop-down list.

Note: Changing the run in the Data Set selection tool does not affect the playback choice. You must specify which data set in **Experiment > Replay > Advance Settings**.

3. (Optional) Select a new value from the Base Column drop-down list.

The selected column acts as the "Time" column for the replay.

Note: The base column should be a strictly increasing list of numbers.

4. Click **Start** to start the playback and save the settings.

Note: Data Set and Base Column options are based on the number of stored runs and the sensor type used.

Starting and Controlling the Playback

Select Experiment > Replay > Start Playback.

Playback begins, and the Data Collection Control buttons change to:

Ш

Pause

Resume Stop ▶

Advance by One Point (enabled only during pause)

Adjusting the Playback Rate

To adjust the playback rate:

1. Select Experiment > Replay > Playback Rate.

The Playback Rate dialogue box opens.



- In the Playback Rate field, click ▼ to open the drop-down list.
- 3. Select the rate at which the playback will play.

Normal speed is 1.00. A higher value is faster and a lower value is slower.

- 4. Select one of the following options:
 - Click **Start** to start the playback and save the settings.
 - Click **OK** to save the settings for use on the next playback.

Repeating the Playback

- 1. Select Experiment > Replay > Start Playback.
- 2. Click Start to start the playback and save the settings.

Adjusting Derivative Settings

Use this option to select the number of points to use in derivative calculations. This value affects the tangent tool, velocity and acceleration values.

Find pH derivative settings using a calculated column.

The Vernier DataQuest™ application can determine a numeric derivative from a list of data with respect to another list of data. The data can be collected using sensors, input manually, or linked with other applications. The numerical derivative is found using a calculated column.

To determine the numerical 1st derivative of List B with respect to List A, enter the following expression in the Column Options dialogue:

```
derivative (B,A,1,0) or derivative (B,A,1,1)
```

To determine the numerical 2nd derivative of List B with respect to List A, enter the following expression:

```
derivative (B,A,2,0) or derivative (B,A,2,1)
```


The last parameter is either 0 or 1 depending on the method you are using. When it is 0, a weighted average is used. When it is 1, a time shifted derivative method is used.

Note: The first derivative calculation (weighted average) is what the Tangent tool uses to display the slope at a data point when examining data. (Analyse > Tangent).

Note: The derivative calculation is completely row based. It is recommended that your List A data be sorted in ascending order.

1. Click Options > Derivative Settings.

The Settings dialogue box opens.




- 2. Select the number of points from the drop-down list.
- 3. Click OK.

Drawing a Predictive Plot

Use this option to add points to the graph to predict the outcome of an experiment.

- 1. Click the **Graph View** tab 🔼.
- 2. From the Analyse menu, select Draw Prediction > Draw.
- 3. Click each area in which you want to place a point.
- 4. Press Esc to release the drawing tool.

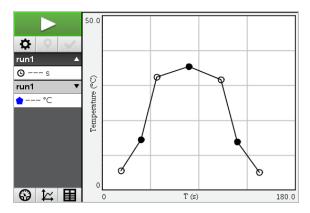

5. To clear the drawn prediction, click Analyse > Draw Prediction > Clear.

Using Motion Match

Use this option to create a randomly generated plot when creating position-versus-time or velocity-versus-time graphs.

This feature is only available when using a motion detector such as the CBR 2[™] sensor or the Go!Motion® sensor.

Generating a Motion Match Plot

To generate a plot:

- Attach the motion detector.
- 2. Click View > Graph.
- 3. Click Analyse > Motion Match.
- 4. Select one of the following options:
 - New Position Match. Generates a random position plot.
 - New Velocity Match. Generates a random velocity plot.

Note: Continue selecting a new position or a new velocity match to generate a new random plot without removing the existing plot.

Removing a Motion Match Plot

To remove the generated plot:

Click Analyse > Motion Match > Remove Match.

Printing Collected Data

You can only print from the computer. You can print any single displayed active view, or with the Print All option:

- One data view.
- All of the data views.

A combination of the data views.


The Print All option has no effect on applications outside of the Vernier DataQuest™ application.

Printing Data Views

To print a data view:

1. On the main menu (top of the window), click File > Print.

The Print dialogue box opens.

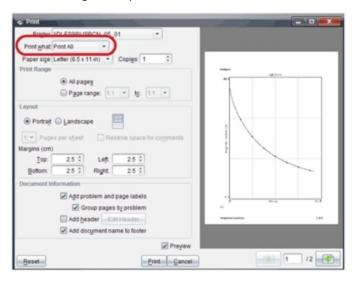

- 2. Select Print All from the Print what drop-down list.
- 3. Select additional options, if needed.
- 4. Click **Print** to send the document to the printer.

Setting Options for the Print All Feature

1. Click Options > Print All Settings.

The Print All Settings dialogue box opens.



- 2. Select the views you want to print.
 - Print Current View. The current view is sent to the printer.
 - Print All Views. All three views (Meter, Graph and Table) are sent to the printer.
 - More. Only the views you select are sent to the printer.
- 3. Click OK.

The Print All Settings are now complete and can be used when printing.

Widgets

All work that you create and save using TI-Nspire™ applications is stored as a document, which you can share with others using TI-Nspire™ software, a TI-Nspire™ CX II handheld, or the TI-Nspire™ App for iPad®. You save these TI-Nspire™ documents as .tns files.

A Widget is a .tns document that is stored in your MyWidgets folder.

You can use Widgets to:

- Easily access text files
- Insert and run scripts (such as the pre-loaded widget example: Stopwatch.tns)
- Quickly insert a saved problem into a document

When you add a Widget, TI-Inspire™ CX extracts only the first page of the selected .tns file, and inserts it into your open document.

Creating a Widget

A document is regarded as a Widget when it is saved or copied to the designated MyWidgets folder. The default location is:

- Windows®: My Documents\TI-Nspire\MyWidgets.
- Mac[®]: Documents/TI-Nspire/MyWidgets.
- Handheld: MyWidgets
- TI-Nspire[™] App for iPad[®] and TI-Nspire[™] CAS App for iPad[®]: MyWidgets

If the MyWidget folder has been inadvertently deleted, you must create it before attempting to use a Widget.


Note: When you add a Widget, TI-Inspire™ CX extracts only the first page of the selected .tns file, and inserts it into your open document.

Adding a Widget

Adding a Widget to a New Document

1. Open a new document.

2. Click Add Widget.



- Scroll to select a .tns file from the box.
- 4. Click Add.




Note: Stopwatch is a preloaded .tns file. Any saved .tns file will show up in this list.




Adding a Widget to an Existing Document

1. Click **Doc** > **Insert** > **Widget**.

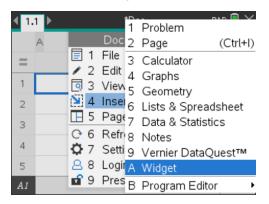

2. Click Add.

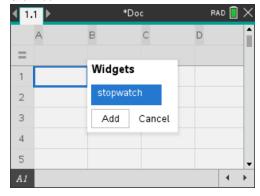




Note: You can also add a Widget to a new or existing document using the Insert menu.

Saving a Widget

- 1. Click
- 2. Navigate to MyDocuments > MyWidgets.
- 3. Type in a name for your Widget.



4. Click Save.

Libraries

What is a Library?

A library is a TI-Nspire[™] document that contains a collection of variables, functions and/or programmes that have been defined as library objects.

Unlike ordinary variables, functions and programmes, which can be used only within a single problem (the problem in which they are defined), library objects are accessible from any document. You can even create public library objects that appear in the TI-Nspire™ Catalogue.

For example, suppose you have created library document matrix containing public library function diagwithtrace() and a private library function errmsg().

Function diagwithtrace() displays the diagonal of a square matrix and calculates the trace of the matrix. If its input is not a square matrix, the function calls errmsg(), which should then return an appropriate error string.

```
Define LibPub diagwithtrace(m)=
Func

© diagwithtrace(mat): diagonal with trace
If rowDim(m)≠colDim(m) Then
Return errmsg("not_square")
Else
Disp diag(m)
Return trace(m)
EndIf

Define LibPriv errmsg(msgcode)=
Func
© Private library function errmsg(msgcode)
...
If msgcode="not_square" Then
Return "Error: matrix is not square"
EndIf
...
EndFunc
```

You could then use the following syntax to display the diagonal and calculate the trace of matrix m defined in the current problem:

matrix\diagwithtrace(m)

Creating Libraries and Library Objects

A document is regarded as a library when it is saved or copied to the designated library folder. The default location is:

- Windows®: My Documents\TI-Nspire\MyLib.
- Mac[®]: Documents/TI-Nspire/MyLib.
- Handheld: MyLib

If the folder has been inadvertently deleted, you must create it before attempting to use libraries.

You can define library objects using either the Programme Editor or the Calculator application. Library objects must be defined with a **Define** command and must reside in the first problem of a library document.

Note: If you use the Programme Editor to define a library function or programme, you must store the object and also save the document. Saving the document does not automatically store the object. For more information, see *Programming*.

Naming restrictions apply to library documents and library objects.

- A library document name must be a valid variable name between 1 and 16 characters long, and it must not contain a period or begin with an underscore.
- A library object name must be a valid variable name between 1 and 15 characters long. It must not contain a period and must not begin with an underscore.

Private and Public Library Objects

When you define a library object, you designate it as private (LibPriv) or public (LibPub).

Define a=5

a is not a library object.

Define LibPriv b={1,2,3}

b is a private library object.

Define LibPub func1(x)=x^2 - 1
func1 is a public library object.

A **Private** library object does not appear in the Catalogue, but you can access it by typing its name. Private objects serve well as building blocks that perform basic, low-level tasks. Typically, private library objects are called upon by the public functions and programmes.

A **Public** library object appears in the Catalogue's library tab after you refresh the libraries. You can access a public library object through the Catalogue or by typing its name.

Mac® only: In version 1.4 of the software, a library document name cannot contain extended characters, such as Ö, á or ñ.

Note: In library programmes and functions defined as public, a comment line (©) immediately following the **Prgm** or **Func** line is automatically displayed as help in the Catalogue. You could, for example, show a syntax reminder there.

Using Short and Long Names

Anytime you are in the same problem where an object is defined, you can access it by entering its short name (the name given in the object's **Define** command). This is the case for all defined objects, including private, public and non-library objects.

You can access a library object from any document by typing the object's long name. A long name consists of the name of the object's library document followed by a backslash "\" followed by the name of the object. For example, the long name of the object defined as **func1** in the library document **lib1** is **lib1\func1**. To type the "\" character on the handheld, press (saift) :

Note: If you cannot remember the exact name or the order of arguments required for a private library object, you can open the library document or use the Programme Editor to view the object. You also can use **getVarInfo** to view a list of objects in a library.

Using Library Objects

Before using a library variable, function or programme, make sure that these steps have been followed:

- The object has been defined with the **Define** command, and the command specifies either the LibPriv or LibPub attribute.
- The object resides in the first problem of a library document. The document must reside in the designated library folder and must meet the naming requirements.
- If you defined the object using the Programme Editor, it has been stored using Check Syntax & Store from the Programme Editor menu.
- The libraries have been refreshed.

Refreshing the Libraries

- ▶ Refresh libraries to make the library objects available to your documents.
 - From the Tools menu, click Refresh Libraries.

Handheld: Press ctrl menu and click Refresh Libraries.

Using a Public Library Object

- 1. Refresh the libraries.
- Open the TI-Nspire[™] application in which you want to use the variable, function or programme.

Note: All applications can evaluate functions, but only the Calculator and Notes applications can run programmes.

- 3. Open the Catalogue and use the library tab to find and insert the object.
- 4. If arguments are required, type them inside the parentheses.

Using a Private Library Object

Refresh the libraries.

 Open the TI-Nspire[™] application in which you want to use the variable, function or programme.

Note: All applications can evaluate functions, but only the Calculator and Notes applications can run programmes.

3. Type the name of the object, such as lib1\func1().

In case of a function or programme, always follow the name with parentheses. To type the "\" character on the handheld, press $\frac{1}{2}$ shift $\frac{1}{2}$.

4. If arguments are required, type them inside the parentheses.

Creating Shortcuts to Library Objects

You can make the objects in a library more easily accessible by using **libShortcut()** to create shortcuts to them. This creates a variable group in the current problem that contains references to all the objects in the specified library document. You can choose to include or exclude the private library objects.

For example, suppose the library document linalg contains functions named clearmat, cofactor, gausstep, help, inversestep, kernelbasis, rank and simultstep. Executing libShortcut("linalg", "la") would create a variable group containing the following members:

la.clearmat la.cofactor la.gausstep la.help la.inversestep la.kernelbasis la.rank la.simultstep

You can refer to those library objects from within the current problem by typing their variable names or by selecting them from the Variables menu.

For more details about using libShortcut(), see the Reference Guide.

Included Libraries

To help you get started with libraries, the TI-Nspire™ Software installation includes a library document with useful Linear Algebra functions. The library is named **linalg** or **linalgCAS** and is installed in the designated library folder.

Note: Updating the handheld's operating system or reinstalling the computer software places all included libraries in the default folder. If you have edited an object in an included library or replaced an included library with your own document of the same name, updating or reinstalling will overwrite your changes. This could also happen after batteries are replaced or the handheld system is reset.

Restoring an Included Library

If you inadvertently delete or overwrite an included library, you can restore it from the installation DVD.

- 1. Open the DVD, and navigate to the libs folder.
- Identify the library file to restore, such as linalg.tns or linalgCAS.tns for the linear algebra library.
- 3. Copy the file.
 - Windows®: Copy the file to your designated library folder. The default location is My Documents\TI-Nspire\MyLib.
 - Mac®: Copy the file to your designated library folder. The default location is Documents/TI-Nspire/MyLib.
 - Handheld: Connect the handheld to your computer, open the TI-Nspire™ software, and copy the library file to the handheld's MyLib folder.
- 4. Activate the new library objects.
 - From the TI-Nspire™ Software **Tools** menu, click **Refresh Libraries**.

Handheld: Press ctrl menu, and click Refresh Libraries.

Using Press-to-Test

The guidelines for many international, national and state assessments allow or require students to use TI-Nspire™ handhelds when taking an exam. Press-to-Test enables vou to quickly prepare student handhelds for exams where use of applications. programmes, and other files is restricted. When a handheld is in Press-to-Test mode, students cannot access pre-existing folders, documents and Scratchpad data. Students using the TI-Nspire™ CX-C handhelds cannot access the Chinese-English dictionary.

Press-to-Test temporarily disables documents and some features of handheld applications. After the exam, these documents and features can be easily restored for classroom use.

The Press-to-Test feature is available on the following TI-Nspire™ handhelds:

- TI-Nspire[™] and TI-Nspire[™] CAS handhelds with OS version 1.3 or higher
- TI-Nspire[™] CX and TI-Nspire[™] CX CAS handhelds with OS version 3.0 or higher
- TI-Nspire™ CX-C and TI-Nspire™ CX-C CAS handhelds with OS version 3.1 or higher
- TI-Nspire™ CM-C and TI-Nspire™ CM-C CAS handhelds with OS version 3.1 or higher
- TI-Nspire™ CX II and TI-Nspire™ CX II CAS handhelds with OS version 5.0 or higher
- TI-Nspire™ CX II-T and TI-Nspire™ CX II-T CAS handhelds with OS version 5.0 or higher.

Press-to-Test is also available in TI-84 Plus Mode when using a TI-Nspire™ handheld that lets you switch between the TI-Nspire™ keypad and a TI-84 Plus keypad. For details, see Press-to-Test for TI-84 Plus Mode.

Note: Some states only permit the use of the TI-Nspire™ in TI-84 mode. To find out if your state allows TI-Nspire™ technology, see the State/Province Information website at education.ti.com/go/testprep.

Entering Press-to-Test Mode by Choosing Restrictions

Note: This applies to TI-Nspire™ CX and TI-Nspire™ CX II handhelds except where noted.

Start the Handheld

- Ensure that the handheld is turned off.
- 2. Press and **hold** down the [esc] Gi on keys.

Do not release the keys until the Press-to-Test screen is displayed.

Select an Angle Setting

- Press tab as necessary to highlight the Angle Setting menu.
- 2. Press ▶ to display the list of angle units. Available units are degree and radian.
- 3. Press ▲ or ▼ to highlight the angle unit you wish to use, and then press |enter | to select it.

Select a CAS Mode (TI-Nspire™ CX II CAS only)

- 1. Press tab as necessary to highlight the CAS Mode menu.
- 2. Press ► to display the list of CAS modes. Available modes are: On, Exact Arithmetic, and Off.

Note: Selecting On enables CAS functions and symbol manipulation. Selecting Exact Arithmetic enables exact results in terms of stacked fractions, π , and radicals $\sqrt{}$. Selecting Off disables CAS and exact results.

Press ▲ or ▼ to highlight the mode you wish to use, and then press enter to select

Select an Exact Arithmetic Mode (TI-Nspire™ CX II-T only)

- 1. Press tab as necessary to highlight the Exact Arithmetic Mode menu.
- Press ► to display the list of Exact Arithmetic modes. Available modes are: On and Off.

Note: Selecting On enables exact results in terms of stacked fractions, π , and radicals $\sqrt{\ }$. Selecting Off disables exact results.

 Press ▲ or ▼ to highlight the mode you wish to use, and then press enter to select it.

Select or Clear Restrictions

Note: Depending on the handheld OS version, all restrictions may or may not be selected by default. Please make sure that the handhelds have the latest OS and carefully review the restriction to make sure that the appropriate functionality is disabled.

You can set each restriction individually, or you can quickly select or clear all restrictions by pressing etri **A**.

- Selecting a restriction disables or limits specific features during the Press-to-Test session.
- Clearing a restriction allows its associated features to be used during the session.

Note: For a detailed list of restrictions, refer to <u>Understanding Press-to-Test</u> Restrictions.

- Press tab or press ▼ to move through the list of restrictions. To quickly access the last item in the list, press ▲. Continue to press ▲ to move up through the list of restrictions.
- 2. When a restriction is highlighted, press 👰 to clear or select it.


Enter Press-to-Test Mode

Note: You cannot change the restrictions after entering Press-to-Test mode. You must exit Press-to-Test and then enter it with new settings. To cancel now without entering Press-to-Test mode, press [esc], or press [tab] to select **Cancel**, and then press [enter].


1. To proceed and enter Press-To-Test using the current settings, press [tab] to select Enter Press-to-Test, and then press enter.

The handheld saves the settings and then restarts. When the restart has completed, the following dialogue box is displayed to confirm the handheld is in Press-to-Test mode. On the TI-Nspire™ CX II, the Test Code and CAS Mode are also displayed.

TI-Nspire™ CX CAS OS Default Restrictions (no option to turn CAS off)



TI-Nspire™ CX II CAS OS Default Restrictions with CAS off




Note: Your handheld display may be different, depending on whether you modified the settings. You cannot change settings after the handheld restarts.

2. Press or enter to select OK.

The Home screen opens. A Lock icon in the title bar indicates the handheld is in Press-to-Test mode. Hovering the cursor over the icon displays the OS version as well as the Test Code on TI-Nspire™ CX II.

TI-Nspire™ CX CAS OS (no option to turn CAS off) TI-Nspire™ CX II CAS OS with CAS Off





- Pre-existing Scratchpad data is temporarily deleted.
- Pre-existing documents and folders within the My Documents folder are temporarily deleted.

Note: Pre-existing documents, folders, and Scratchpad data will be restored when you exit Press-to-Test mode.


- A "Press-to-Test" folder is created within the My Documents folder.
- TI-Nspire™ CX II-T: Depending on which Exact Arithmetic functionality you have selected, either "Exact Arithmetic", or " Exact Arithmetic Off" will display on the Home and Press-to-Test screens.
- TI-Nspire™ CX II CAS: Depending on which CAS functionality you have selected, either "CAS"/"CAS On", "Exact Arithmetic", or "CAS Off" will display on the Home and Press-to-Test screens.
- The Chinese-English dictionary, if installed, is temporarily disabled on TI-Nspire™ CX-C handhelds.

Entering Press-to-Test Mode with a Test Code

Note: This applies to TI-Nspire™ CX II handhelds only. You can obtain a test code by using the Choose Restrictions method or preparing the handheld in the TI-Nspire™ Premium Teacher software (see the Preparing Handhelds Remotely section in that guidebook).

- Ensure that the handheld is turned off.
- 2. Press and **hold** down the tab Ghon keys.


Do not release the keys until the Enter Press-to-Test Code screen is displayed.



Note: This also displays after restoring factory defaults or rebooting the handheld.

3. Enter your eight-digit test code.


If the code is valid, a green tickmark will display.



Note: This example uses the TI Factory Default Code 0001-6382.

Press Next.

The Summary screen displays.



Scroll to review the restrictions or press **Back** to enter a different code.

5. Press Start to enter Press-to-Test mode.

After rebooting, the Summary screen displays.



6. Press **OK** to start the test.

Notes

When the code is validated, it is stored and will be displayed when the Enter Pressto-Test Code dialogue is invoked again.


The same test codes are used for all TI-Nspire™ CX II CAS, TI-Nspire™ CX II and TI-Nspire™ CX II-T handhelds. The CAS and Exact Arithmetic Mode settings are ignored when appropriate.

Test Code Examples

TI Factory Default Restrictions

- Default Angle = Degree
- CAS Mode = Off
- Numerical Solver enabled

Press-to-Test Setup




Press-to-Test Summary Screen



Minimum Restrictions

- Default Angle = Degree
- CAS Mode = On
- All restrictions off

Press-to-Test Setup




Press-to-Test Summary Screen



Maximum Restrictions

- Default Angle = Degree
- CAS Mode = Off
- All restrictions on

Press-to-Test Setup



Press-to-Test Summary Screen



Note: Maximum restrictions Test Code will change if additional restrictions are added in the future.


Accessing Press-to-Test Help

Use one of the following methods to get help for using Press-to-Test:


- From the Press-to-Test window, click the Help button 2 located in the lower left corner.
- From an open document: Press docv, and then select Press-to-Test > Help.

The Help window opens:

TI-Nspire™ CX Help



TI-Nspire™ CX II Help



Clearing Data in Press-to-Test Mode

You can clear documents, Scratchpad data, and libraries added in a Press-to-Test session without exiting Press-to-Test mode. Clearing data does not change the Pressto-Test restrictions, so you can use this method to start a new test that requires the same restrictions.


Note: To change restrictions, you must exit Press-to-Test and then enter Press-to-Test mode with new settings.

To clear Press-to-Test data without changing restrictions:


- Ensure the handheld is turned off.
- 2. Turn on the handheld by pressing and holding down the [esc] (on keys.

The Press-to-Test window is displayed with an option to **Reset**.

TI-Nspire™ CX CAS OS



TI-Nspire™ CX II CAS OS with CAS Off



- 3. Select Reset Press-to-Test to clear the data.
 - or -

Select Cancel to close the window without clearing the data.

Note for TI-Nspire™ handhelds with removable keypad: Clearing Press-to-Test data while using the TI-Nspire™ keypad does not affect data created with the TI-84 Plus keypad. Your TI-84 Plus data remains intact, although it is not accessible while the TI-Nspire™ kevpad is in place.

Reviewing Press-to-Test Mode Restrictions

You can review the Angle Setting and restrictions in effect on a handheld that is in Press-to-Test mode. You cannot change the restrictions while in the testing session. You must exit Press-to-Test mode and re-enter it with new restrictions.


To review the current restrictions:

1. Turn the handheld off, and then turn it back on.

A dialogue box opens, showing the selected Press-to-Test settings. On the TI-Nspire[™] CX II, the Test Code and CAS Mode are also displayed.

TI-Nspire™ CX CAS OS Default Restrictions (no option to turn CAS off)

TI-Nspire™ CX II CAS OS Default Restrictions with CAS off





2. Press ▲ or ▼ to scroll through the restrictions.

TI-Nspire™ CX: Restrictions that are currently in effect are shown with a tick mark.

Operating the Handheld in Press-to-Test Mode

When a handheld is in Press-to-Test mode, the LED indicator on top of the handheld flashes (on the TI-Nspire™ CX II). The LED lets you quickly see that the handheld is in Press-to-Test mode—even when the handheld is off.

- (Numeric) If the LED indicator flashes green-green, all restrictions are selected.
- (Exact Arithmetic) If the LED indicator flashes green-green, all restrictions are selected and Exact Arithmetic is off.
- (CAS) If the LED indicator flashes green-green, all restrictions are selected and CAS is off.
- If the LED indicator flashes yellow-yellow, one or more restrictions have been

Notes:

- Older TI-Nspire™ CAS handhelds do not have an LED indicator on the top of the handheld.
- The LED on the TI-Nspire™ CM-C handheld indicates battery status only. It does not flash when the handheld is in Press-to-Test mode.

System Settings

The system settings in effect prior to entering Press-to-Test mode are not passed to the Press-to-Test session. Instead, when you first enter Press-to-Test mode, the system settings are set to their defaults. You can change the settings while in Press-to-Test mode. When you exit Press-to-Test mode, system settings are restored to those in effect before you entered Press-to-Test.

Freeing Storage for Press-to-Test Mode

If your handheld has insufficient storage available to enter Press-to-Test mode, a message appears suggesting that you remove some documents.

Your options include:


- Backing up documents to a computer or another handheld and then deleting them from your handheld. You can restore the documents after you exit Press-to-Test mode.
- Deleting unnecessary documents from your handheld.

For detailed instructions on freeing storage, refer to the "File Management" section of the Getting Started guide for your handheld.

Turning the Handheld Off and On in Press-to-Test Mode

If you turn the handheld off, or if it goes into Automatic Power Down™ (APD™) while in the Press-to-Test mode, it remains in testing mode when powered on again. A message reminds you that the handheld is in Press-to-Test mode, and the selected restrictions are shown.

TI-Nspire™ CX CAS OS Default Restrictions (no option to turn CAS off)



TI-Nspire™ CX II CAS OS Default Restrictions with CAS off



Note: If a dialogue box is open when the handheld powers down while in Press-to-Test mode, that dialogue box is displayed when you turn the handheld on again.

Auto-Save

If the handheld restarts while in Press-to-Test mode, the handheld remains in testing mode and returns to the last active document.

Managing Battery Power

If using a TI-Nspire™ or TI-Nspire™ CAS handheld, you can remove and replace batteries while in Press-to-Test mode. If you change the batteries, the handheld remains in testing mode. When you turn it on again, the reminder dialogue box is displayed.

Before entering Press-to-Test mode or before beginning an exam, you should ensure the rechargeable battery is fully charged on any handheld that uses a rechargeable battery.

Working with Documents in Press-to-Test Mode


When the handheld is in Press-to-Test mode, all folders and documents present on the handheld before you entered Press-to-Test mode are disabled. While in Press-to-Test mode, you will only see the Press-to-Test folder listed in My Documents.

Teachers can send and collect documents when handhelds are in Press-to-Test mode. However, if you want to collect a document that students have created or edited while in Press-to-Test mode, you must collect the document before the students exit Pressto-Test mode.


Accessing the Press-to-Test Folder

- 1. Press 面 n to access the Home screen.
- 2. Select **Browse** to open the file manager.

TI-Nspire™ CX OS



TI-Nspire™ CX II OS



You can create, save, or delete folders and documents within the Press-to-Test folder.


Creating a New Document


- 1. Press 面 n to access the Home screen.
- 2. Select **New** or press ctrl **N** to open a new document.
- 3. Use ▼ and ▲ to highlight the application you want to add to the page, and then press enter.

A lock icon in the title bar indicates that the handheld is in Press-to-Test mode. Hovering the cursor over the icon displays the OS version as well as the Test Code on TI-Nspire™ CX II.

TI-Nspire™ CX OS

TI-Nspire™ CX II OS





Transferring Press-to-Test Restrictions


Use the Transfer Press-to-Test feature to quickly distribute a specific set of Press-to-Test restrictions to multiple student handhelds without requiring a computer.

Requirements

- If you send Press-to-Test settings to a handheld that is already in Press-to-Test mode, the restriction settings on the receiving handheld are overwritten and all data created during that Press-to-Test session is lost.
- The operating system version on the sending handheld must be equal to or higher than the OS on the receiving TI-Nspire™ handheld.
- The transfer will fail if the receiving handheld does not have enough storage.

Transferring the Settings

- 1. Enter Press-to-Test mode on the "sending" handheld. Be sure to select the specific set of restrictions required for the exam.
- 2. Connect the sending handheld to a "receiving" handheld using a mini-to-mini USB cable.

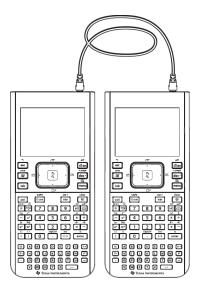

Make sure both handhelds are turned on and the Press-to-Test window is visible on the sending handheld. If necessary, turn the handheld off, and then turn it on again.



4. Select Transfer Press-to-Test.

The Press-to-Test Angle Setting and Restrictions are copied to the receiving handheld.

When the transfer is complete, the receiving handheld restarts in Press-to-Test mode, and the sending handheld displays a confirmation message.



Note: Both handhelds can now be used as sending handhelds.

5. Connect the next receiving handheld, and repeat from Step 3 until all handhelds are configured.

Exiting Press-to-Test Mode

When you exit Press-to-Test mode on a handheld:


- All documents created during the Press-to-Test session are deleted. If you re-enter Press-to-Test mode, the Press-to-Test folder is empty.
- All files and system settings are restored to what they were before you entered Press-to-Test mode.
- If a document was open before you entered Press-to-Test mode, that document is restored to the same view (Browse, Page sorter, or page view) as before. If the document contained unsaved changes, the changes remain unsaved.
- If no document was open, the handheld displays the My Documents folder.

Using Another Handheld to Exit Press-to-Test Mode

You can exit Press-to-Test mode on your hand-held by connecting it to another handheld and using the Exit Press-To-Test menu command. The two handhelds can be mixed. For example, you can connect a TI-Nspire™ CX II hand-held to a TI-Nspire™ hand-held or connect a TI-Nspire™ CAS hand-held to a hand-held that does not have CAS.

Important: If the other handheld is in Press-to-Test mode, it will also exit Press-to-Test.

- 1. Connect your handheld to the other handheld using the unit-to-unit connection cable.
- 2. Make sure both handhelds are turned on.
- 3. On your hand-held, press @ to display the Home screen.
- 4. Select **Browse**, and then press docv to display the Documents menu.
- 5. On the Documents menu, select Press-to-Test > Exit Press-To-Test. This menu item is enabled only in Press-to-Test mode.



- Your handheld exits Press-to-Test mode and restarts in normal mode. If the other handheld is in Press-to-Test mode, it also exits Press-to-Test mode and restarts.
- If the handheld is not connected properly, it displays the following message.



The handheld does not exit Press-to-Test mode until it restarts. If you disconnect the cable before the restart begins, the handheld remains in Pressto-Test mode.

Note: You can also exit Press-to-Test mode by successfully receiving an OS upgrade (from another handheld or through computer software). Receiving the same OS version will not cause the handheld to exit Press-to-Test.

Cancelling Press-To-Test on Multiple Handhelds

Teachers running TI-Nspire™ CX Premium Teacher Software can cancel Press-to-Test mode remotely on multiple CX and CX II handhelds. The handhelds must be turned on and connected to the teacher's computer by one of these means:

- TI-Nspire[™] Docking Station or TI-Nspire[™] CX Docking Station
- TI-Nspire™ Navigator™ Cradle
- TI-Nspire™ CX Wireless Network Adapter
- A direct connection through a standard USB cable

Cancelling by Using TI-Nspire™ CX Premium Teacher Software

Make sure the handhelds are turned on and connected to the teacher's computer by one of the means mentioned above.

2. On the Tools menu, select Prepare Handhelds > Exit Press-to-Test.

Cancelling by Using TI-Nspire™ Student Software

- 1. Connect the handheld to your computer.
- 2. In the Documents Toolbox, open the Content Explorer.
- 3. In the Connected Handhelds pane, select the handheld.
- 4. On the Options menu , select Exit Press-to-Test.

Cancelling by Using Send to Class

When a class is in session and students are logged in, you can cancel Press-to-Test by sending the "Exit Test Mode.tns" file to the class. Students not logged in will receive the file when they log in.

 Create an empty .tns file named "Exit Test Mode.tns" and save it in your default TI-Nspire™ folder.


Note: The file name is case sensitive and must be named as described.

2. Click Tools > Send to Class.

The Select file(s) to send dialogue box opens.

- 3. Ensure the Files tab is open.
- 4. Navigate to the folder where the "Exit Test Mode.tns" file is located and select it.
- 5. Click Next.

The Select individual(s) dialogue box opens.

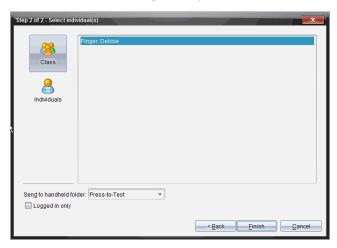

Click Class storm to send the file to the whole class. To send the file to only those
class members who are currently logged in, select the Logged in only tick box.

Note: To send the file to an individual student, click Individuals A, and then click the student name.

- 7. Type Press-to-Test in the Send to handheld folder field.
- 8. Click Finish.

For students who are logged in, the "Exit Test Mode.tns" file is sent, and the connected handhelds exit Press-to-Test mode. The handhelds restart and the operating system loads.

Cancelling by Using the Transfer Tool

1. Create an empty .tns file named "Exit Test Mode.tns" and save it in your default TI-Nspire™ folder.


Note: The file name is case sensitive and must be named as described.

2. In the Content Workspace, select Tools > Transfer Tool.

The Transfer Tool opens.

- 3. Click Add to Transfer List.
- 4. Navigate to the folder where the "Exit Test Mode.tns" file is located, and select it to add it to the transfer list.
- 5. In the Transfer Tool, select the Exit Test Mode.tns file.

The Edit Destination Folder field becomes active when you select the file name.

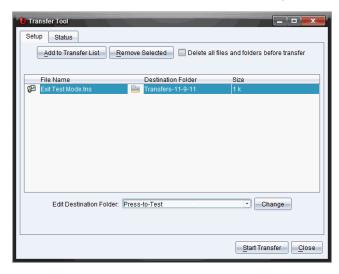

6. Type Press-to-Test in the Edit Destination Folder field, and click Change.

Note: You must type the folder name manually. You cannot select it by navigating to the handheld's Press-to-Test folder.

7. Click Start Transfer.

The "Exit Test Mode.tns" file is sent to the connected handhelds, and Press-to-Test is cancelled. The handhelds restart, and the operating system loads.

To cancel Press-to-Test mode on additional handhelds, disconnect the restarted handhelds and connect the other handhelds. The transfer process continues until you stop the transfer.

- 8. To stop the transfer, click Stop Transfer.
- 9. Click Close when all transfers are complete.

Understanding Press-to-Test Restrictions

By default, all restrictions are selected when you enter Press-to-Test mode, with the exception of Numerical Solver.

- Selecting a restriction disables or limits its associated features during the Press-to-Test session.
- Clearing a restriction allows its associated features to be used during the session.

Restricting Geometry Functions

When you choose to limit geometry functions, all items on the Measurement, Construction and Transformation menus are disabled.

Restricting Graphs Functions

On the Graphs menu, the following items are disabled:

- Actions > Coordinates and Equations
- Geometry > Measurement, Construction, and Transformation

Disabling Function and Conic Grab and Move

- You cannot move any function or conic in Graphs, Geometry, or Scratchpad. For example, if you have graphed $y=x^3$, you can select the function but you cannot move or manipulate it by dragging.
- You cannot access the attribute that toggles the displayed form of a conic equation between Standard and Expanded.
- Disabling function and conic grab and move does not apply to lines and functions in Data & Statistics.
- Disabling function grab and move does not restrict sliders in the Graphs and Geometry applications.
- You can still grab the coordinate plane and move it around.

Disabling Vector Functions

When vector functions are disabled, students cannot calculate the following functions:

- Unit vector [unitV(]
- Cross product [crossP(]
- Dot product [dotP(]
- Eigenvector [eigVc(]
- Eigenvalue [eigVI(]

Disabling the "isPrime" Function

The isPrime(function determines if a number is a prime number (a whole number greater than two that is evenly divisible only by itself and one). Disabling this function prevents students from selecting the isPrime(command in the Catalogue and from selecting Test > IsPrime in Maths Operators. If a student manually enters the isPrime(function, submitting the expression results in an error message.

Disabling Differential Equation Functionality

The Differential Equation graph type is disabled in the Graphs and Geometry applications. Users cannot manually type and graph a differential equation.

Related maths functions rk23(, euler(, and deSolve(are also disabled.

Disabling Inequality Graphing

When inequality graphing is disabled, students cannot graph inequalities with <, >, \leq and \geq or grab and drag inequalities to a graph in the Graphs, Geometry and Scratchpad applications.

Disabling 3D Graphing

When this feature is disabled, students cannot use the 3D Graphing view.

Disabling Implicit Graphing, Conic Templates, Conic Analysis, and Geometric Conics

When these features are disabled, students cannot graph equations in terms of x = ay + c or ax + by = c. Conic templates are not available, and students cannot analyse conics or graph the geometric conic of an ellipse, parabola, hyperbola or conic by five points.

Disabling Trigonometric Functions

Disabling trigonometric functions prevents students from using the following functions in calculations and graphing.

csc	sec	cot
csc ⁻¹ , arccsc	sec ⁻¹ , arcsec	cot ⁻¹ , arccot
csch	sech	coth
csch ⁻¹ , arccsch	sech ⁻¹ , arcsech	coth ⁻¹ , arccoth

- Attempting to evaluate any of these functions results in an error message.
- Students cannot select the csc, sec, cot, csc-1, sec-1, and cot-1 functions by pressing trig on the handheld.
- Students cannot select the disabled functions from the Catalog.

Disabling the log_hx Template

Students cannot use the log_bx (convert to logbase) and log(a, b) commands and templates, including log_bx templates.

- When a students presses [log] on the handheld, only calculations in log10 format are accepted.
- If a student manually enters log(a,b) or >logbase(into an expression, attempting to evaluate the expression results in an error message.
- Students are allowed to enter log(a), log(a,10) and log(a,10.).

Disabling Summation Functions and Templates

Students are prevented from using summation functions and templates. The \(\)(and sumSeq(functions are disabled.

Disabling Polynomial Root Finder

The polyRoots(, cPolyRoots(, solve(, simult(, zeros(, and cZeros(functions are disabled. Attempting to evaluate any of these functions results in an error message.

Note: When the polynomial tools are disabled, students cannot use Find Roots of Polynomial, Real Roots of Polynomial or Complex Roots of Polynomial.

Disabling Simultaneous Equation Solver

The linSolve(and simult(functions are disabled in menus and in the Catalogue. Attempting to evaluate either of these functions results in an error message.

Disabling Numerical Solver

The nSolve(is disabled in menus and in the Catalogue. Attempting to evaluate either of

these functions results in an error message.

Disabling Sliders

When this feature is disabled, students cannot insert or create sliders in the Graphs, Geometry, Data & Statistics, and Notes applications.

Disabled Chinese-English Dictionary


In Press-to-Test mode, the Chinese-English Dictionary is automatically disabled if installed on TI-Nspire™ CX-C handhelds. You cannot use the dictionary while in Pressto-Test mode.

Press-to-Test for TI-84 Plus Mode

The information in this section applies only to TI-Nspire[™] handhelds that let you switch between the TI-Nspire™ keypad and a TI-84 Plus keypad. To use Press-to-Test in TI-84 Plus mode, the handheld must be started with the TI-84 Plus keypad in place.

Note: Using Press-to-Test in TI-84 Plus mode does not affect documents created with the TI-Nspire[™] keypad in place.

Be sure to exit Press-to-Test mode before attempting to switch to a different keypad. If you switch keypads while in Press-to-Test mode, the handheld displays the following message:



Enabling Press-to-Test Mode in TI-84 Plus Mode

- Turn the handheld off.
- 2. Press and hold (1,) and (0N) until the **Reset Options** screen opens.




By default, the angle mode is set to DEGREE, Stat Diagnostics are ON, and the functions logBASE and summation (Σ) are disabled.

- 3. To change the default settings, move the cursor over the desired setting and press ENTER].
- 4. Press ZOOM (beneath OK on the screen) to select **OK**.

The options you selected are displayed on the Reset Complete screen.



- 5. Press any key to continue.
- 6. To verify that Apps, Programmes and functions are disabled:

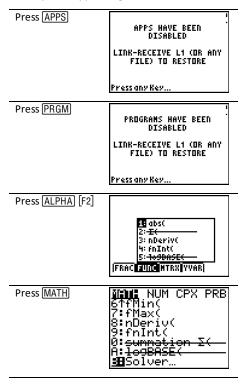

Other variables stored in RAM and in archived memory (including AppVars) are deleted.

Verifying that Functions are Disabled in TI-84 Plus Mode

When students try to access disabled functions, the following informational screens are displayed:

109BASEC HAS BEEN summation X(HAS BEEN DISABLED DISABLED LINK-RECEIVE L1 (OR ANY LINK-RECEIVE L1 (OR ANY FILE) TO RESTORE FILE) TO RESTORE Press any Key... Press any Key...

Note: If a handheld is already in Press-to-Test mode, applications and programmes are disabled. If you try to enter Press-to-Test on a TI-Nspire™ handheld using the TI-84 keypad while already in Press-to-Test mode, the Reset Complete screen is displayed. Current settings are shown and RAM is reset. The handheld is ready to be used by another student in a clean testing state as needed.



Exiting Press-to-Test Mode in TI-84 Plus Mode


When you re-enable TI-Nspire[™] handhelds using the TI-84 keypad and TI-84 Plus handhelds, Apps and Programmes are restored.

To restore a TI-Nspire[™] handheld in TI-84 Plus mode to full functionality:

- Link your handheld to another TI-Nspire™ handheld in TI-84 Plus mode or a TI-84 Plus handheld.
- Transfer any file to or from the handheld that is in testing mode.
- Alternatively, you can use TI Connect™ to download a file from your computer to vour handheld.

To transfer a file from another TI-84 Plus handheld:

- 1. On the receiving unit, press [2nd] [LINK] and then highlight **RECEIVE**. Do not press ENTER yet.
- 2. On the sending calculator, Press [2nd] [LINK].
- 3. Select a file to send by selecting a category, and then selecting a file to send.



4. Highlight **TRANSMIT** to send the file, but do not press ENTER yet.



- 5. Press ENTER on the receiving calculator.
- 6. Press ENTER on the transmitting calculator.

Note: You may need to rename or overwrite your variable for the file transfer to be successful.

Note: TI TestGuard™ App for the TI-83 Plus and TI-84 Plus is not designed to run and transfer testing set-ups when loaded on a TI-Nspire™ handheld in TI-84 mode, including the Re-Enable feature. Also, the blinking LEDs that indicate you are in Pressto-Test mode do not blink when in TI-84 mode.

Using the TI-SmartView™ Emulator

With three layout options to choose from, teachers will find that the emulator facilitates classroom presentations. In the teacher software, layout options are:

- Handheld Only
- Kevpad + SideScreen
- Handheld + SideScreen


In the student software, the TI-SmartView™ emulates the keypad, which along with the handheld view, gives students the ability to drive the software as if using a handheld.

Opening the TI-SmartView™ Emulator


The TI-SmartView™ emulator is located in the Documents Workspace. To open the emulator view:

- 1. Open the Documents Workspace.
- 2. Click, which is located in the Documents Toolbox.

In the teacher software, the handheld is displayed with Handheld and SideScreen panels open in computer mode as shown in the following illustration. You can use the keypad on the emulated handheld, but the document won't appear on the emulated handheld screen until you switch to Handheld mode.

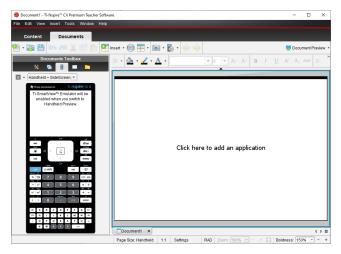

In the student software, the TI-Nspire[™] CX II keypad is displayed with the side screen open in computer mode. You can use the keypad on the emulated handheld to work with the document in the side screen in either computer mode or handheld mode.

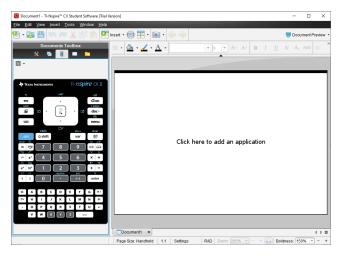

Click View > Handheld.

-or-

Click in the status bar to switch to handheld mode.

Choosing Display Options

In the teacher software, use this option to choose how to display the emulator in the software window.

1. In the emulator panel, click Handheld + SideScreen .

Click File > Settings > TI-SmartView™ Options.

- 2. Select one of the following options:
 - Handheld Only. Displays the emulated handheld and hides the workspace and other panels.

Note: To keep the Handheld Only display in front of other application windows, click **Always in Front** at the top right of the TI-SmartView[™] panel.

- Keypad + SideScreen. Opens a larger view of the keypad along with the side screen.
- Handheld + SideScreen. Opens the entire emulated handheld along with the side screen.

Changing the Faceplate

To select a faceplate option:

 In the emulator panel, click to open the menu.

Click File > Settings > TI-SmartView™ Options.

- 2. Select one of the following options:
 - Dark
 - Light
 - Outline

Changing the Width of the TI-SmartView™ Panel

To change the width of the TI-SmartView[™] emulator panel:

Click the right edge of the panel and drag it until it is the width you want.

Changing the Size of the Screen in the Workspace

When in handheld mode, use the Scale to change the size of the screen.

Drag the slider to the appropriate scale percentage. The scale slider is located on the far right side of the status bar, at the bottom of the TI-Nspire™ window. Scale percentages range from 100% to 200%. The default scale is 150%.



Note: If computer mode is selected, you cannot change the size of the workspace.

Working with the Emulated Handheld

To input data and work with files on the emulator, you can use the computer keyboard, TI-SmartView[™] keypad, TI-Nspire[™] menus and icons or any combination of these.

Note: Within one command, you cannot use a combination of both the keypad and the keyboard. For example, you cannot press Ctrl on the keyboard and click menul on the emulator to open a context menu.

For the most part, you can perform any function in the TI-SmartView™ emulator that you can perform on the handheld. Keys and applications operate the same way.

Note: If you switch to Computer mode, you can still use most of the keys on the emulated handheld or keypad and all keystrokes are reflected in the workspace. However, some key combinations may only work in Handheld mode.


As you click keys on the emulator or press keys on the keyboard that activate keys on the emulator, those keys change colour, making it easy for your audience to follow along. The last key selected stays highlighted.

In the teacher software, the emulator screen and the side screen are both interactive. You can click on icons and menu items on both screens. You can also right-click to display menus on both screens.

All handheld shortcuts and arrow functionality work from the computer keyboard. For example, to save a document, you can click ctrl S on the emulator keypad or you can press Ctrl + S on the computer keyboard. When using a Mac[®], press \mathcal{H} + S.

Using the Touchpad

You can operate the Touchpad on the TI-Nspire™ Touchpad keypad using either the touchpad on a laptop or by using the mouse to click the Touchpad. Areas of the Touchpad are highlighted as you click the arrow zones.

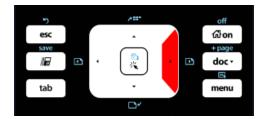

An arrow is highlighted when you press or tap it.

- Clicking the ∢, ▶, ▲, or ▼ keys on the Touchpad moves through menus one item at a time.
- Clicking and holding down an arrow on the Touchpad causes continual movement in the selected direction.
- Clicking and sliding the mouse across the Touchpad area enables you to move the mouse pointer.
- Clicking the middle of the Touchpad selects the highlighted menu option.

Using Settings and Status

When working with the TI-SmartView™ emulator, you can change General Settings and Document Settings. For more information, see Using the Documents Workspace.

You can view all other settings, but you cannot change them in the TI-SmartView™ emulator. However, the ability to view these options provides teachers with an instructional tool when they need to show students how to set up a handheld.

To view settings and status:

- 1. Click **G** on to access the Home screen.
- 2. Click Settings.

Setting or Settings	Description
Language	You can open the languages menu and select a language, but you cannot save changes. To change the language, use the TI-Nspire™ menu File > Settings > Change Language option.
Handheld Setup	You can open the menus and select items to demonstrate which items to choose, but you cannot save any changes.
Handheld	You can access the screen. The # symbol replaces any numeric values


Setting or Settings	Description
Status	that would be displayed on the handheld.
About	You can open the About screen and view the software version. Other information that pertains only to the handheld hardware is marked as "Not Applicable".
Login	You can display the Login to Class screen and type in the User Name and Password fields. Login is not available.

Changing TI-SmartView™ Options

You can change the emulator options, even when the emulator panel is closed.


1. In the teacher software, click File > Settings > TI-SmartView™ Options.

The TI-SmartView™ Options dialogue box opens.

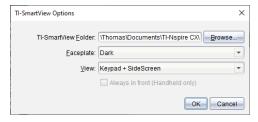

In the student software, click File > Settings > Keypad Options.

The Keypad Options dialogue box opens.



2. Click Browse to change the folder where documents are saved and accessed in the My Documents folder when using the emulator.

Important: If you change the TI-SmartView™ location, you must also copy or move the MyLib folder and paste it to the new location to see library objects.

The default location of MyLib is:

- Windows®: Documents\TI-Nspire\MyLib.
- Mac®: Documents/TI-Nspire/MyLib.

Note: Close and reopen the TI-Nspire[™] application for the libraries to reflect the change.

- 3. Click **▼** to open the menu and select a faceplate.
- Handheld Only, select Always in Front to keep this window on top of all other open applications.
- 5. Click **OK** to save the settings.

Working with Documents

You can open multiple documents in the workspace by selecting File > Open Document from the menu or using keyboard shortcuts. When you switch between these documents, the emulated handheld shows only the current document. You can insert pages and problems using either the TI-Nspire™ menus or icons, keyboard shortcuts or TI-SmartView™ menus or shortcuts.

Opening a Document

You can open a document by navigating to it on the emulator, the same way you open a document on the handheld, or you click File > Open Document.

When you open a document using the emulator, you can only open documents that are in the folder displayed on the emulator (usually the My Documents folder, unless you specified a different folder in your TI-SmartView™ settings). When you open a document using the menu path, you can browse to find any TI-Nspire™ document on your computer or network. If you open a document using the emulated handheld, it replaces the document that was previously open.

Note: If the number of characters in the document's file path name exceeds 256 characters, the document cannot be opened and an error message is displayed. To avoid this error, keep file and folder names short or move files up in the file path.

Saving a Document

When you save a document using the File > Save Document menu or icon, keyboard shortcuts, keypad shortcuts or emulator menus, the document is saved in the same location where the file was opened. To save the file in another location or with a different name, click File > Save As.

Using Screen Capture

To capture the current page, press Ctrl + J (Mac[®]: \mathcal{H} + J) on your keyboard or on the emulated handheld. The image is automatically placed in the Clipboard and in the TI-Nspire™ Screen Capture window. You can paste the image into another application without having to take additional steps. This feature is only available when the TI-SmartView[™] panel is active and the workspace is in Handheld mode.

All other screen capture features work the same way they do in other areas of TI-Nspire[™] software. For more information, see *Capturing Screens*.

Using the Help Menu


Use the Help menu to find useful information to help you use the software more productively. You can:

- Open the PDF help file (press F1 or click Help).
- Open the web-based help file (press F2 or click Online Help).
- Activate your software license.
- Register your TI product.
- Explore TI resources such as Activities Exchange, where you can find lessons. quizzes and other instructive activities shared by teachers.
- Explore online troubleshooting.
- Check for updates to the software or updates to operating systems for TI-Nspire™ handhelds and the TI-Nspire™ Lab Cradle.
- Check to see which version of the software you are using.

Activating Your Software Licence


- Ensure that your computer is connected to the Internet.
- From the Help menu, select Activate to open the Texas Instruments Activation Wizard.
- 3. Click Activate your Licence, and then click Next.

The Complete Software Activation dialogue box opens.

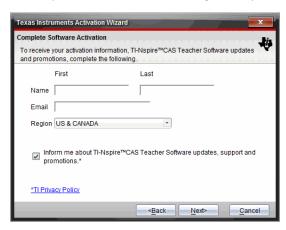


- 4. Complete the name and email fields, and then select the region where you live if different from the default entry. If you want to receive emails from TI about updates, support and promotions, ensure the tick box is selected.
- 5. Click Next.

The Activate your software dialogue box opens.

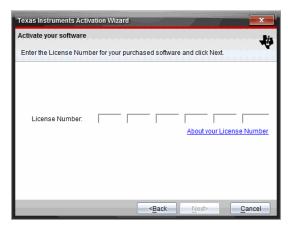


- 6. Type the licence number.
- Click Next.

The Licence Agreement dialogue box opens.

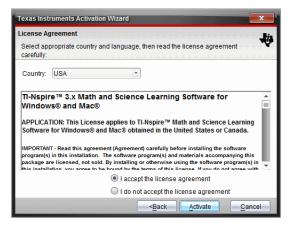

- 8. In the Country field, select your country from the drop-down list if it is different from the default entry.
- 9. Review the licence agreement, and then select to accept the agreement.
- 10. Click Activate. The licence number is validated against the TI database to ensure it is valid.

If the licence number is valid, the Successful Activation dialogue box opens. If the licence number is not valid, check to make sure the numbers are entered correctly. If the problem persists, contact TI Support.

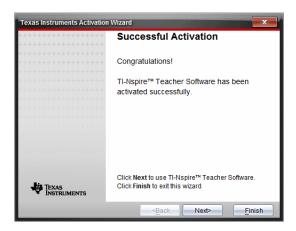

- 11. Click Next to continue, or select Finish to complete the installation with default settings.
- 12. When prompted, click **OK** to accept the default location for your TI-Nspire™ folder. If needed, navigate to the location on your computer where you want to store your TI-Nspire™ documents and files.
- 13. Select whether or not to replace any documents that have the same name.

The software launches and the Welcome Screen opens.

Registering Your Product

- Ensure that your computer is connected to the Internet.
- From the Help menu, select Register to access the TI Product Registration site.
- 3. Follow the instructions on the website.

Downloading the Latest Guidebook

- Ensure that your computer is connected to the Internet.
- 2. From the Help menu, select Download latest Guidebook.

The Education Technology website opens with the Guidebooks tab active.

3. Click the title of the Guidebook that you want to download.

A PDF version of the Guidebook opens on your desktop.

Exploring TI Resources

The Help menu also provides links to TI resources and websites.

Select Help > Visit education.ti.com to access the Texas Instruments Education Technology website.

 Select Help > Visit Activities Exchange to access the Texas Instruments Activities Exchange, site, a forum where you can browse by subject to find ready-to-use maths and science learning activities appropriate for secondary school to college.

Note: Activities available for download may vary depending on your geographical region.

Select Help > Explore Online Troubleshooting to access the TI Knowledge Base where you can find general information, troubleshooting help, product usage tips and information specific to TI products.

Updating the TI-Nspire™ Software

Update the Software

- 1. Ensure that your computer is connected to the Internet.
- 2. Close any open documents.
- 3. From the Help menu, select Check for Upgrades and Notifications.
 - If your software is current, a confirmation message appears.
 - If your software is not current, you are prompted to update.
- 4. Click **Update** to download and install the update, or click **Close** to cancel.

A progress indicator shows the download progress. If you receive a connection error, check your Internet connection and try again.

Note for users updating TI-Nspire™ Navigator™ Teacher Software: Your portfolio and class records reside on your computer as a database. Because the new software might have features that are not supported in the old database structure, the old data might need to be converted. When conversion is necessary, a Database Update tool helps you make a backup of the old database. The tool appears during the first startup of the updated software.

Manage Automatic Checking

Automatic checking uses the Internet to check for upgrades each time you open the TI-Nspire™ software. If your system is not up-to-date, you receive a notification. You can turn automatic checking on or off.


- 1. From the Help menu, select Check for Upgrades and Notifications.
- 2. Tick or clear the Automatically check for updates tickbox.
- Click Close.

Updating the OS on a Connected Handheld

Note: To avoid losing unsaved data, close all documents on the handheld before updating its operating system.

- 1. Ensure that your computer is connected to the Internet.
- 2. In the Documents Toolbox, click the Content Explorer tab to show connected handhelds.
- 3. Select the handheld that you are updating.

- 4. From the Help menu, select Check for OS Updates.
 - If the operating system is current, a confirmation message appears.

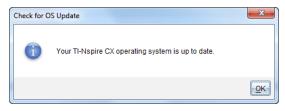

If the operating system is not current, the TI-Nspire™ software prompts you to install the latest OS now. If the updated OS file is not already available on your computer, you can choose a location for it.




5. Click Continue and follow the prompts to install the OS on the handheld, or click Close to cancel.

When the update is complete, the handheld restarts automatically.

Viewing Software Version and Legal Information

1. From the Help menu, select **About TI-Nspire™** < Product Name > **Software**.

Note: You do not need an Internet connection to open this screen.

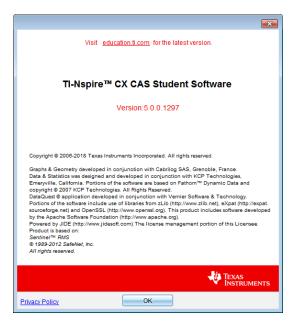

2. Click **OK** to close the window.

Helping Improve the Product

This product includes a feature that can help TI improve the product by automatically collecting anonymous information about product usage and reliability.

Note: Depending on how your software was installed, you might see the following screen the first time you start the software. You also can access the feature manually.

- From the **Help** menu, select **Product Improvements**.
- Read the information on the screen, and click one of the buttons:
 - To allow information to be collected, click Yes, I want to help.
 - To prevent collection, click **No thanks**.

Enabling the TI-Nspire™ CX Navigator™ System

To enable the TI-Nspire™ CX Navigator™ System, select Window > Enable TI-Nspire CX Navigator.

Visit education.ti.com/eguide for information about the TI-Nspire™ CX Navigator™ System including:

- Collaborative Activity
- **Document Transfer**
- Quick Poll
- Screen Capture
- Portfolio and Auto-grading

Appendix A: Conversion Categories and Units

The following table lists categories and their respective units that are available in the Unit Conversion Assistant. When the units are pasted to the entry line, underscores (_) are added before the name of each unit to differentiate them from other variables. For example:

- _cm ▶_m
- _km/_hr▶_m/ s
- °C▶ °F

Category	Units
Length	Å (Angstrom)
	au (astronomical unit)
	cm (centimetre)
	dm (decimetre)
	fath (fathom)
	fm (fermi)
	ft (foot)
	in (inch)
	km (kilometre)
	ltyr (light-year)
	m (metre)
	μm (micron)
	mi (mile)
	mil (1/1000 inch)
	mm (millimetre)
	nm (nanometre)
	Nmi (nautical mile)
	pc (parsec)
	rod (rod)
	yd (yard)
Area	acre (acre)
	cm ²
	dm^2
	ft ²
	ha (hectare) in ²
	km ²

Category	Units
	m ²
	mi ²
	mm ²
	yd^2
Volume	cm ³
	cup (cup) dm ³
	ft ³
	floz (US fluid ounce) flozUK (British fluid ounce) gal (US gallon) galUK (British gallon) in ³
	l (litre) m ³
	ml (millilitre) pt (pint) qt (quart) tbsp (tablespoon) tsp (teaspoon) yd ³
Time	day (day) hr (hour) min (minute) ms (millisecond)
Velocity	ft/min ft/s knot (knot) km/h

Category	Units
	km/min
	km/s
	m/s
	mi/h
	mi/min
	mi/s
Temperature	°C (Celsius)
	°F (Fahrenheit)
	K (kelvin)
	°R (Rankine)
Mass	amu (atomic mass unit)
	gm (gram)
	kg (kilogram)
	lb (pound)
	mg (milligram)
	mton (metric ton)
	oz (ounce)
	slug (slug)
	ton (ton)
	tonUK (long ton)
Force	dyne (dyne)
	kgf (kilogram force)
	lbf (pound force)
	N (newton)
	tonf (ton force)
Energy	BTU (British thermal unit)
	cal (calorie)
	erg (erg)
	eV (electron volt)
	ftlb (foot-pound)
	J (joule)
	kcal (kilocalorie)
	kJ (kilojoule)
	kgf*m
	kWh (kilowatt-hour)
	latm (liter-atmosphere)
Power	hp (horsepower)

Category	Units
	kW (kilowatt)
	PS (metric horsepower)
	W (watt)
Pressure	atm (atmosphere) bar (bar)
	inH ₂ O (inches of water)
	inHg (inches of mercury) kPa (kilopascal) kgf/cm ²
	lbf/in ²
	mbar (millibar) mmH ₂ O (millimetres of water)
	mmHg (millimetres of mercury) N/m ²
	Pa (pascal) psi (pounds per square inch) torr (millimetres of mercury)

General Information

Online Help

education.ti.com/eguide

Select your country for more product information.

Contact TI Support

education.ti.com/ti-cares

Select your country for technical and other support resources.

Service and Warranty Information

education.ti.com/warranty

Select your country for information about the length and terms of the warranty or about product service.

Limited Warranty. This warranty does not affect your statutory rights.

Texas Instruments Incorporated

12500 TI Blvd.

Dallas, TX 75243

Index		copyrights to documents (.tns)	80
		drop points questions	168
		equation questions	162
•		files to transfer list	45
.tilb file	130	images to questions	158
	130	links	21
3		lists questions	169
		open response questions	161
3D aspect ratio, changing	298	pages	77
3D functions		problems	77
graphing	292	questions158,	160
3D graph	200	shortcuts	20
changing appearance	296	text (PublishView™ documents)	109
3D graphing	545		502
3D Graphing view292	, 294	Adding files to a lesson bundle	124
3D graphs animating with sliders	300		151
editing expressions	295		395
plot colors		analysing data	555
	296		490
range settings	298		494
rotating	294		491
setting background colours	297	analysis options	
showing/hiding	297	removing	494
shrinking/magnifying	297	angle bisector construction282,	334
3D parametric equations graphing	202	angles	
3D projection type	293	measuring275,	327
3D projection type	297	animating	
Α		points285,	341
•		animations	
activating software licences	557	changing points direction286,	342
activities		pausing285,	-
copying	26	resetting286,	342
filtering	24	resuming285,	342
keyword searches	25	answer	
opening	25	using last answer	211
saving	25	appearance	
add files to lesson bundle	124		296
adding		application	
(x,y) numerical input questions	166	tools menu	4
applications	73	applications	70
applications (PublishView™		adding	73
documents)	97	Calculator	177
colours	68		398
copyrights	155	deleting	77

Geometry	302	bounded area	249
Graphs & Geometry	214	box plots	405
grouping	76	breaking long calculations	451
images	151		
Lists & Spreadsheet	347	С	
Notes	443	Calculate output option	377
Question	154	calculating distributions (Lists &	3//
swapping	74	Spreadsheet)	384
approximate or exact results	360	calculations	
arcs, drawing 260,	312	arithmetic290,	344
area, bounded	249	breaking	451
area, measuring274,	326	derivative settings	513
arithmetic calculations290,	344	types available	381
arranging		Calculator	
captured screens	144	menus	177
aspect ratio, changing in 3D graphing	298	Calculator application	177
attributes		Calculator history	
changing for objects 271,	323	copying197	-198
auto-save	536	deleting	199
automatic		reusing	198
sliders in Graphs application	208	viewing	196
Automatically creating variables in	204	captions, viewing variable names	399
Lists & Spreadsheet	204	Capture Class	
adjusting	430	printing screens	149
changing attributes in Graphing	430	saving screens	148
view	245	view options	143
dilating	425	capture class tool	140
moving (translation)	425	capture page option	134
scaling	425	Capture Selected Handheld option	135
setting values (Data & Statistics)	430	captured screens	
axis ranges		rearranging	144
setting in graphs	503	refreshing	145
_		active pages in documents	134
В		data (Lists & Spreadsheet)	372
backup		handheld current screens	133
of class data	560	images in hand-held mode	133
bar charts		pages in active documents	133
creating415-416,	418	screen stacks	146
battery power	536	student handhelds	140
bisect a segment280,		capturing images	170
bisecting an angle282,	334	DragScreen	138
borders (PublishView™ documents),		caseplots (default)	399
hiding/showing	104		-

Catalogue		closing documents (.tns)	66
converting measurement units	185	collected data	
inserting items from .179, 182, 355,	377	deleting	487
cell references		viewing details	488
absolute and relative	354	collecting and managing data sets	485
using in formulas	355	colors	
cells		changing271, 296,	323
body	350	colour	
copying in tables	356	setting grid colour in Graphs	244
deleting contents	355	colours	
entering text	351	3D graph background	297
exact or approximate results	360	applying to backgrounds	446
formulas	350	changing 354, 436-437,	446
inserting ranges in formulas	351	changing for points	509
linking to a variable	205	colours, adding	68
linking to variables	357	columns	
navigating in tables	353	based on other columns	363
repeating formulas	356	copying	359
selecting a block of	356	defining options	497
selecting a range	351	deleting	359
sharing table cells	357	deleting data from	361
changing	337	generating data in tables	362
General Settings	59	inserting182,	359
Graphs & Geometry settings	61	linking to list variables	349
language	1, 4	moving	360
links	22	resizing	358
Changing language	4	selecting358,	509
changing screen size	553	sharing table columns as lists	348
character strings		commands	
storing as variables	201	cSimult(546
charts		inSolve(546
bar	415	sumult(546
dot	414	comments	
pie	417	inserting in Notes	448
scatter	402	comparing	
chemical equation boxes	456	data sets	486
Chinese-English dictionary	547	screens	148
circle arcs, creating 260,	312	comparing collected data sets	485
circles, drawing261,		compass construction 284,	336
class data		confidence intervals available	390
backup	560	conic analysis	545
clearing Press-to-Test	533	conic by five points 265,	317
closing		conic templates	545
Transfer Tool	51	conics, graphing	226

connected handhelds		creating	
opening documents	30	bar charts415-416	, 418
saving files	31	histograms	409
constructions		lists from table columns	348
angle bisector282	2, 334	matrices	181
compass284	,	new documents	537
locus270, 283, 322	2, 335	pie charts	417
midpoint280), 332	plots	404
parallel line281		probability plots	411
perpendicular bisector 282	2, 334	PublishView™ documents	82
perpendicular line281	L, 333	scatter plots	412
content		shapes with MathDraw266	, 318
viewing on handhelds	27	summary plots	367
Content Explorer	56	system of equations	184
content workspace		user-defined units	186
exploring	15	variables	200
Content workspace	2	Creating a new lesson bundle	123
Content Workspace	15	Creating a variable from a Graphs &	123
context menu		Geometry value	202
graphing from	455	Creating a variable from a Lists &	
context menu in Lists & Spreadsheet	359	Spreadsheet cell value	204
converting		creating documents (.tns)	63
.tns files to .tnsp files	121	curve fit options	493
.tnsp files to .tns files	119	curves, bounded area	249
measurement units	185	customising	
page size; page size, converting;		Graphs work area	244
preview, setting		_	
document; setting		D	
document preview 68		data	
text to hyperlinks	115	backup of class data	560
copying	26	capturing (Lists & Spreadsheet)	372
activities	26	capturing object data (Graphs &	3,2
Calculator history197		Geometry)	372
cells from Excel® spreadsheets .	371	copying to other applications	369
handheld images	133	deleting from columns	361
images	134	displaying values401	. 404
images in hand-held mode	133	exact or approximate results	360
screens	138	generating columns of	362
table cells	356	graphing table data	365
table data	369	raw and summary overview	403
table rows or columns	359	retrieving remote	483
copyrights		selecting ranges	507
adding	155	sorting in tables	361
adding to documents (.tns)	80	55. ting in tubics	301

sorting plotted categories	422	problems	76. 78
Data & Statistics		PublishView™ objects	96
getting started with	398	shortcuts	20
images	151	table rows and columns	359
settings	399	variables	212
data analysis		deleting images	153
interpolation	491	derivative settings	
data collections		adjusting	513
remote sensors	481	Destination folder	
scaling graphs	506	editing	48
setting sensor parameters	472	diagnostics, regression	399
thresholds	483	differential equation graphing	545
data plots		differential equations, graphing	236
finding curve fit	492	dilating axes	425
data sets		disabling functions	
comparing	486	"isPrime"	545
deleting collected	487	3D graphing	545
renaming	487	Chinese-English dictionary	547
selecting for replays	512	conic analysis	545
selecting to plot	504	conic templates	545
storing	485	differential equation graphing	545
data sets, collecting and managing	485	function and conic grab and	
data types		move	544
variables	200	geometry functions	544
defined functions, recalling	194	implicit graphing	545
defining	00 101	inequality graphing	545
functions184, 1		logbx template	546
settings	1, 4	numeric solver	546
unitsdeleting	186	polynomial root finder	546
applications	77	simultaneous equation solver	546
Calculator history	199	sliders	547
collected data sets	199 487	summation functions and	
contents of table cells	355	templates	546
data from columns	361	trigonometric functions	545
documents (.tns)	66	vector functions	545
elements from lists	350	displaying	
files	350 49	data values4	•
hyperlinks (PublishView™	49	Graph 1	496
documents)	115	graphs	496
images (PublishView™	113	graphs in Page Layout view	497
documents)	118	grid in Graphs	244
pages	76, 78	teacher handhelds	142
part of an expression	195	TI-SmartView™ emulator in	FF2
•		teacher software	552

two graphs simultaneously	496	E	
distribution, calculating	384	oditing	240
document settings		editing Destination folder	240
managing on connected	24	functions	48
handheldsdocuments	34	math expressions	240
creating .tnsp files	537	-	194
	82	table settings	397
printing .tnsp files	121	values in lists	349
saving .tnsp files	86	elements, deleting from lists	350
documents (.tns) changing General Settings	59	ellipse as geometric shape26	2 21 E
closing		Emailing a lesson bundle	
creating	66 63	emulator, See TI-SmartView™	131
deleting	63	emulator	54
<u> </u>	66	enabling	54
opening opening with TI-SmartView™	64	Press-to-Test 527, 53	0. 532
emulator	556	Press-to-Test for TI-84 Plus	547
printing	79	entry line	0.,
properties	80	multiple statements	185
protecting	81	equation questions	
read-only	81	adding	162
saving	65-66	equations	
saving in emulator	556	differential	237
switching between	556 70	graphing	225
viewing		graphing parametric	232
documents (.tns, .tnsp)	70	graphing polar	232
opening (Content Workspace)	25	Lotka-Volterra	236
documents workspace	3	of geometric objects	289
Documents Workspace	52	ordinary differential equations	
domain restrictions	221	(ODE)	236
dot charts	414	errors	
DragScreen feature		showing (Notes)	452
drawing	55, 156	estimating	404
arcs26	sn 312	values between data points	491
rectangles	, -	evaluating expressions	180
statistics plots	441	exact input, for window settings	242
triangles	–	exact or approximate results	360
drawing geometric shapes 26		Excel® spreadsheets, copying from	371
drawing shapes	30, 312	exiting Proce to Tost	F 40
ellipse26	53 315	Press to Test from multiple	540
drop points questions	,	Press-to-Test from multiple handhelds	541
adding	168	Press-to-Test in TI-84 Plus mode	549
-		Press-to-Test on one handheld	549
		Press-to-Test using Transfer Tool	540 543
		1 1 C33-10-1E31 d3ilig Hall3lei 1001	543

expanding view details area	488	finance functions	196
experiments		finance solver	195
basic steps	466	finding	
exploring		area under collected data	490
content workspace	15	slope of collected data	491
resources pane	15	software version number	561
Exploring the Content workspace	2	folders	
Exploring the Documents workspace	3	storing PublishView™ objects	96
expressions	240	footers in PublishView™ documents	103
changing functions in tables	397	formatting	
copying from Calculator history 197	-198	results (Calculator)	178
deleting part of	195	text (PublishView™ documents)	110
editing 194	. 295	formatting text	67
entering from templates 179		formatting toolbar	
entering in tables	351	hiding	68
entering with wizards182		showing	68
evaluating 178		frequency plots	367
selecting (Notes)	447	function and conic grab and move .	544
selecting in Calculator	194	functions	
variables	201	changing expressions in tables .	397
variables ::::::::::::::::::::::::::::::::::::	201	defining184, 190	-191
F		displaying history241,	295
		displaying list of in tables	397
features		domain restrictions	221
refreshing screen captures	145	editing	240
File transfers		graphing217, 224,	431
stopping	51	hiding table of	240
files adding to lesson bundles	420	hiding/showing	247
-	128	recalling definitions	194
adding to transfer list	45	renaming	241
copying/pasting from lesson bundles	128	rotating	219
deleting from lesson bundles	128	showing values in tables	396
opening in lesson bundles	128	storing as variables	201
pasting from lesson bundles	128	stretching	219
refreshing list in lesson bundles .		supported distributions	385
=	128	translating	219
removing from Transfer List	47	trunsiating	215
renaming in lesson bundles	128	G	
working with files on connected	29		
handhelds	29	Gallery view	143
deleting	49	generating	
filtering activities	24	columns of data	363
finance		geometric objects	
munec	195	equations of	289

geometric shapes	Graphs
conic by five points265, 31	rescaling work area 242
hyperbola 265, 31	
parabola264, 31	
Geometry	variables, creating 202
hiding objects	g Graphs & Geometry application 214
Geometry application 30)2 Graphs & Geometry settings 61
Geometry application settings215, 30)2 grid
geometry functions 54	annanana in Caraba
gestures, to create shapes	displaying 244
(MathDraw)266, 31	l8 grouping applications 76
graph	guidebooks, downloading 559
changing appearance 29	96
graphing	Н
3D functions	92 handhalds
3D parametric equations 29	handhelds capturing current screens 133
3D view 29	92
conic sections	26
equations 22	capturing student screens 140
from context menu 45	changing settings on connected 34
functions 217, 224, 43	checking for OS updates 37
parametric equations 23	copying images
path plot 21	installing OS update
polar equations	locating using Identify Selected . 41
relations 22	managing from teacher's
scatter plots	computer 34
sequences	pasting inages
table data	41
time plots	24
web plots	viewing content on connected . 27
Graphing view	working with mes on connected 29
changing axes attributes 24	headers in PublishView™ documents 103
graphs	Help, accessing 557
adding titles 50	help, Press-to-Test mode 533
displaying49	helping improve the product 562
displaying Graph 1	hiding 96
displaying in Page Layout view . 49	3D grapns 297
displaying two simultaneously . 49	tunctions in work areas 247
position versus time 51	objects in Geometry
rescaling	student names
scaling 50	table of functions
setting axis range	niding format toolbar
	nistograms
	aujusting scale 409
velocity versus time 51	15

creating	409	input descriptions table	377
exploring data in bins	408	pooled option	396
modifying bins	410	inserting	
scale formats	409	background images216, 304,	, 340
history		cell ranges in formulas	351
relation241	L, 295	chemical equations	447
history, See Calculator history	196	comments in Notes	447
hyperbola		elements in lists (Lists &	
as geometric shape265	5, 317	Spreadsheet)	350
hyperlinks (PublishView™		hyperlinks (PublishView™	
documents)		documents)	111
converting text to	115	images	447
editing	115	images (PublishView™	
linking to files	111	documents)	116
linking to websites	114	images in questions	158
		maths expressions	447
I		PublishView™ objects	92
Identify Colocted	44	rows or columns in tables	359
Identify Selected	41	rows or columns into matrices .	182
images	151	shape symbols	447
adding to questions	158	text	438
Data & Statistics	151	text (PublishView™ documents)	109
deleting	153	inserting images	151
Graphs & Geometry	151	installing	
inserting151		software updates	560
inserting background216, 304	1, 340	installing a handheld OS update	38
moving	152	intercept, changing	427
Notes	151	interfaces	
Question	151	multi-channel sensors	467
Quick Poll	151	single-channel sensors	468
resizing	153	intervals	475
saving133	3-134	isPrime function	545
selecting	152		
TI-Nspire™ applications	151	К	
images (PublishView™ documents) -116	5, 118	kayward carchas	2.5
implicit graphing	545	keyword searches	25
importing		L	
remote data	483	-	
inequality graphing	545	labeling	
inferential statistics		point coordinates	288
calculating test results		language	4
(Calculate)	377	changing	1, 4
drawing plots	441	last answer	
graphing test results	377	using	211

LED indicator	535	lists	
LED lights		deleting elements in tables	350
sensors	483	inserting elements in tables	350
lesson bundle		sharing table columns as	348
add files	124	storing as variables	201
adding files	124	viewing and editing	349
creating	123	Lists & Spreadsheet	
lesson bundles		variables204-	205
adding files	128	Lists & Spreadsheet application	347
copying/pasting files	128	lists questions	
deleting files	128	adding	169
Documents workspace	123	locating software updates	560
opening	126	lock icon	537
opening files	128	locking	
	128	intercept of movable lines at	
renaming files	128		427
to .	522	locus construction \ldots 270, 283, 322,	335
library objects			546
using	524	logbx template	546
lines		Lotka-Volterra equations	236
adding movable to plots	426		
locking intercept at zero	427	М	
rotating movable	427	Make Presenter option	148
			148 536
	427	managing battery power	536
tracing movable	427 428	managing battery power managing collected data sets	536 485
tracing movablelines (geometric)	427 428 309	managing battery power managing collected data sets Managing lesson bundles	536
tracing movable	427 428 309	managing battery power managing collected data sets Managing lesson bundles math expression boxes	536 485 128
tracing movable	427 428 309	managing battery power managing collected data sets Managing lesson bundles math expression boxes attributes	536 485
tracing movable lines (geometric) creating	427 428 309 307	managing battery power	536 485 128
tracing movable lines (geometric) creating	427 428 309 307 497	managing battery power managing collected data sets Managing lesson bundles math expression boxes attributes math expressions editing	536 485 128 458
tracing movable lines (geometric) creating	427 428 309 307 497 205	managing battery power managing collected data sets Managing lesson bundles math expression boxes attributes math expressions editing selecting in Calculator	536 485 128 458
tracing movable lines (geometric) creating	427 428 309 307 497 205 357	managing battery power managing collected data sets Managing lesson bundles math expression boxes attributes math expressions editing	536 485 128 458 194 194
tracing movable lines (geometric) creating	427 428 309 307 497 205 357 349	managing battery power	536 485 128 458 194 194
tracing movable lines (geometric) creating	427 428 309 307 497 205 357 349 111	managing battery power	536 485 128 458 458 194 194 318 452
tracing movable lines (geometric) creating	427 428 309 307 497 205 357 349 111 114	managing battery power	536 485 128 458 458 194 194 318 452
tracing movable lines (geometric) creating	427 428 309 307 497 205 357 349 111 114 200	managing battery power	536 485 128 458 194 194 318 452 457
tracing movable lines (geometric) creating	427 428 309 307 497 205 357 349 111 114 200 205	managing battery power	536 485 128 458 194 194 318 452 457 178
tracing movable lines (geometric) creating	427 428 309 307 497 205 357 349 111 114 200 205 21	managing battery power	536 485 128 458 194 194 318 452 457 178
tracing movable lines (geometric) creating	427 428 309 307 497 205 357 349 111 114 200 205 21 21	managing battery power	536 485 128 458 458 194 194 318 452 457 178 179
tracing movable lines (geometric) creating	427 428 309 307 497 205 357 349 111 114 200 205 21 21 22	managing battery power managing collected data sets Managing lesson bundles math expression boxes attributes math expressions editing selecting in Calculator MathDraw, creating shapes with gestures 266, maths actions maths expression boxes 452, maths expressions, See expressions maths templates matrices creating inserting rows or columns	536 485 128 458 194 194 318 452 457 178 179
tracing movable lines (geometric) creating	427 428 309 307 497 205 357 349 111 114 200 205 21 21 22 23	managing battery power	536 485 128 458 194 194 318 452 457 178 179 181 182
tracing movable lines (geometric) creating	427 428 309 307 497 205 357 349 111 114 200 205 21 21 22 23 22	managing battery power	536 485 128 458 194 194 318 452 457 178 179 181 182

measurements		formatting text	445
storing as variables	201	images	151
measurements, converting units	185	inserting comments	448
measuring		selecting text	445
angles275,	327	using colours	446
circumference or perimeter273,	325	numeric plots, splitting by categories	419
distance between objects273,	325	numeric solver	546
length272,		numerical input questions	540
sides of objects273,		adding	166
slope of object274,		G	100
measuring objects272,		0	
menus	5 2.		
Calculator	177	objects	
midpoint construction280,	332	_	1, 97
models, PDF distribution	384	changing attributes271,	
motion match		changing fill colors 271,	
options	515	dilating279,	
removing plots	515	duplicating278,	
moving		enlarging279,	
images (PublishView™		finding area274,	326
documents)	117	hiding in Geometry	339
links	23	measuring272,	324
points (Data & Statistics)	422	reflecting277,	329
PublishView™ objects	94	rotating279,	331
rows and columns (Lists &		symmetrical images277,	329
Spreadsheet)	360	tracing geometric	337
moving images	152	transformation of277,	329
multiple-line functions190	-191	open response questions	
multiple cells, selecting	356	adding	161
multiple choice questions		opening	
adding	160	activities	25
multiple statements on entry line	185	lesson bundles	126
My Documents	537	My Documents	537
		Transfer Tool	45
N		Opening a lesson bundle	126
naming		opening documents	
table columns	348	connected handhelds	30
variables (name conflicts)	358	opening documents (.tns)	64
naming columns	497	Opening files within a lesson bundle .	126
navigating in tables	353	operating handhelds	535
new documents	537	options	
normal probability, creating plots		capture page	134
Notes	411	Capture Selected Handheld	135
adding shapes	448	Make Presenter	148
adding shapes	440		

randomise screens	142	pausing	512
organizing PublishView™ sheets	103		513
orthogonal 3D view		repeating	
	297	starting	512
orthographic 3D projection	297	plots adding a value on existing plot .	423
OS update installing on a handheld	20	_	
•	38	adding movable lines	426
overlapping PublishView™ objects .	95	caseplots (default)	399
P		changing type	424
r		colors in 3D graphs	296
Page Layout view	497	creating	404
page numbers (PublishView™		customising	235
documents)	103	dot plots	404
Page Sorter	53, 74	graphing233	3-234
pages		path plot	218
adding	77	predictive	514
deleting	76, 78	probability	411
grouping	76	removing motion match	515
rearranging	75	scatter	412
selecting	75	sorting categories	422
ungrouping	77	summary	367
panes		X-Y line	413
resource	15	plotting	
parabola		dot charts	414
creating from focus and		models	494
directrix26		path plot	218
creating from focus and vertex 26		statistical data	377
parallel line construction28	31, 333	table data	365
parametric equations		points	000
graphing	232	animating285	5. 341
pasting		changing colours	509
handheld images	133	changing direction286	
images	134	creating 255-256, 307	
images in hand-held mode	133	identifying intersections 257	
screens	138	labeling coordinates	288
table data	369	moving (Data & Statistics)	422
PDF		of interest	222
save document as 7		selecting (Data & Statistics)	422
perpendicular bisector construction 28	32, 334		
perpendicular line construction 28	31, 333	setting markers	509
perspective 3D view	297	setting options	508
pie charts, creating	417	points and lines, creating 255	, 307
piecewise functions	184	polar equations	222
playbacks		graphing	232
adjusting rate	513	polygons, drawing262	1, 314

polynomial root finder	546	saving	86
pooled variances	396	sheets10	3, 108
pre-defined measurement units	185	text10	8, 110
precision of results	178	video files	118
predictive plots			
drawing and clearing	514	Q	
preparing handhelds remotely	34	O.P. A tomplete	
Press-to-Test		Q & A template	444
managing on connected		Question	454
handhelds	34	images	151
TI-84 Plus	547	navigating the application	173
Press-to-Test folder	537	questions (x,y) numerical input	100
Press-to-Test restrictions	534		166
Press-to-Test, help	533	adding	158
preview, printed document	80	adding images	158
print preview	80	drop points	168
printing		equation	162
captured screens	149	lists	169
PublishView™ documents	121	multiple choice	160
printing documents (.tns)	79	open response	161
probability, creating plots	411	responding	174
problems		Self Check mode	161
adding	77	suggested responses	162
deleting	76, 78	using the Question application .	154
renaming	79	Questions - students	
problems (PublishView™	, ,	accessing toolbar	173
documents)10	01-102	types of	173
product improvements	562	questions (students)	
programmes		checking answers	175
defining	190	toolbar options	173
Proof template	444	Quick Graph, using	365
protecting documents (.tns)	81	Quick Poll	
PublishView™ documents	82	images	151
applications		Quick Poll questions	
converting11		clearing answers	176
creating	82	responding	174
hyperlinks 11	_	types	174
images			
		R	
objects	91, 96	random numbers	
printing	121	generating in tables	363
problems	101	randomise screen option	142
problemsdeleting problems (PublishView™		range of cells, inserting in formulas	
·			351
documents) 102		raw data	403

raw data, adjusting histogram scale	409	resizing	
rays		images (PublishView™	
creating258	3, 310	documents) 11	7
re-entering Press-to-Test	533	PublishView™ objects 9.	4
read-only documents (.tns)	81	table rows and columns 35	8
rearranging		resizing images	3
captured screens	144	resources pane	
reducing view details area	488	exploring 1	.5
refreshing		restoring data 51	.1
captured screens	145	results	
RefreshProbeVars	488	copying from Calculator history 197-19	8
registering products	559	setting decimal approximation . 17	8
regression diagnostics	399	using last answer 21	.1
regression lines, showing	428	reusing	
relations	420	last answer in Calculator 21	1
displaying history24	1 205	reviewing	
graphing	229	restrictions 53	4
showing table of values	239	rotating objects279, 33	1
remote data	239	rows	
retrieving	483	copying 35	9
removing	403	deleting 35	9
documents from memory	535	inserting182, 35	9
hyperlinks from text	115	moving	
links	22	resizing	-
Press-to-Test from multiple	22	selecting	-
handhelds	541	33.	•
	_	S	
Press-to-Test using Transfer Tool	543	-	
Press-to-Test using Transfer Tool variables	543 212	Save	
Press-to-Test using Transfer Tool variablesremoving files from Transfer list	543 212 47	Save document as PDF	1
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images	543 212	Save document as PDF	
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming	543 212 47 153	Save document as PDF	:5
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets	543 212 47 153	Save document as PDF	.5 3
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions	543 212 47 153	Save document as PDF	.5 .3 .6
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions problems (PublishView™	543 212 47 153 487 241	Save document as PDF	5 3 6 6
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions problems (PublishView™ documents)	543 212 47 153 487 241	Save document as PDF	5 3 6 6
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions problems (PublishView™ documents) renaming problems	543 212 47 153 487 241	Save document as PDF	5 3 6 6
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions problems (PublishView™ documents) renaming problems replays	543 212 47 153 487 241 102 79	Save document as PDF	15 13 16 16 16 14
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions problems (PublishView™ documents) renaming problems replays starting	543 212 47 153 487 241	Save document as PDF	15 16 16 16 14 16
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions problems (PublishView™ documents) renaming problems replays starting reponses	543 212 47 153 487 241 102 79 512	Save document as PDF	15 16 16 16 14 16
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions problems (PublishView™ documents) renaming problems replays starting reponses adding suggested	543 212 47 153 487 241 102 79	Save document as PDF	15 16 16 16 16 16 16 16 16 16 16 16 16 16
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions problems (PublishView™ documents) renaming problems replays starting reponses	543 212 47 153 487 241 102 79 512	Save document as PDF	15 13 16 16 16 16 16 11
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions problems (PublishView™ documents) renaming problems replays starting reponses adding suggested rescaling graphs (dilation)	543 212 47 153 487 241 102 79 512 162 425	Save document as PDF	15 16 16 16 16 16 16 16 16 16 16 16 16 16
Press-to-Test using Transfer Tool variables removing files from Transfer list removing images renaming data sets functions problems (PublishView™ documents) renaming problems replays starting reponses adding suggested rescaling	543 212 47 153 487 241 102 79 512	Save document as PDF	15 16 16 16 16 16 16 16 16 16 16 16 16 16

Scratchpad		connected handhelds	
clearing on connected		sending Press-to-Test to handhelds	538
handhelds	34	sensors	
screen capture tool	133	calibrating	474
screen captures		changing measurement units	473
Capture Class	133	connecting	471
comparing screens	148	for computers	469
copying	138	for handhelds	468
Gallery view	143	for remote data collections	481
hiding student names	142	interfaces467	_
Make Presenter option	148	LED lights	483
pasting	138	reversing reading display	474
showing student names	142	setting to zero	474
stacks	146	setting up offline	472
teacher preferences	142	triggering	483
Tiled view	143	types	468
zooming in/out	146	sequences, generating in table	400
screen stacks	146	columns	364
screens	1-10	sets	304
comparing	148	renaming data sets	487
scrolling in tables	353	sets of data, comparing	486
searching for activities	25	sets, storing data as	485
segment	23	settings	100
0			
bisector). 332	changing on connected	
bisector 280 segments), 332	changing on connected handhelds	34
	•		34 399
segments	•	handhelds	_
segments creating258	•	handhelds Data & Statistics application	399 1, 4
segments creating	3, 310	handhelds Data & Statistics application defining	399 1, 4 , 302
segments creating	3, 310 356	handhelds	399 1, 4
segments creating	356 509	handhelds Data & Statistics application defining in Geometry application language	399 1, 4 , 302 1, 4
segments creating	3, 310 356 509 507	handhelds Data & Statistics application defining in Geometry application 215 language TI-SmartView™ emulator	399 1, 4 , 302 1, 4
segments creating	3, 310 356 509 507 512	handhelds Data & Statistics application defining in Geometry application language TI-SmartView™ emulator shapes adding in Notes	399 1, 4 , 302 1, 4 554
segments creating	356 509 507 512 504 194	handhelds Data & Statistics application defining in Geometry application TI-SmartView™ emulator shapes adding in Notes creating with MathDraw266	399 1, 4 , 302 1, 4 554 448 , 318
segments creating	356 509 507 512 504 194 358	handhelds Data & Statistics application defining in Geometry application language TI-SmartView™ emulator shapes adding in Notes	399 1, 4 , 302 1, 4 554 448 , 318
segments creating	356 509 507 512 504 194 358 444	handhelds Data & Statistics application defining in Geometry application 215 language TI-SmartView™ emulator shapes adding in Notes creating with MathDraw drawing geometric equations of	399 1, 4 , 302 1, 4 554 448 4, 318 1, 312 289
segments creating	356 509 507 512 504 194 358	handhelds Data & Statistics application defining in Geometry application TI-SmartView™ emulator shapes adding in Notes creating with MathDraw drawing geometric 260	399 1, 4 302 1, 4 554 448 3,318 3,312 289 402
segments creating	356 509 507 512 504 194 358 444	handhelds Data & Statistics application defining in Geometry application 215 language TI-SmartView™ emulator shapes adding in Notes creating with MathDraw drawing geometric equations of legends shortcuts	399 1, 4 , 302 1, 4 554 448 4, 318 1, 312 289
segments creating	356 509 507 512 504 194 358 444 445	handhelds Data & Statistics application defining in Geometry application 215 language TI-SmartView™ emulator shapes adding in Notes creating with MathDraw drawing geometric equations of legends	399 1, 4 302 1, 4 554 448 3,318 3,312 289 402
segments creating	356 509 507 512 504 194 358 444 445	handhelds Data & Statistics application defining in Geometry application 215 language TI-SmartView™ emulator shapes adding in Notes creating with MathDraw drawing geometric equations of legends shortcuts showing	399 1, 4 302 1, 4 554 448 3, 318 3, 312 289 402 20
segments creating	356 509 507 512 504 194 358 444 445 96 152	handhelds Data & Statistics application defining in Geometry application language TI-SmartView™ emulator shapes adding in Notes creating with MathDraw drawing geometric equations of legends shortcuts showing 3D graphs	399 1, 4 302 1, 4 554 448 318 312 289 402 20
segments creating	356 509 507 512 504 194 358 444 445 96 152	handhelds Data & Statistics application defining in Geometry application In Geometry application TI-SmartView™ emulator shapes adding in Notes creating with MathDraw drawing geometric equations of legends shortcuts showing 3D graphs functions in work areas student names	399 1, 4 302 1, 4 554 448 318 312 289 402 20 297 247 142
segments creating	356 509 507 512 504 194 358 444 445 96 152 75	handhelds Data & Statistics application defining in Geometry application Z15 language TI-SmartView™ emulator shapes adding in Notes creating with MathDraw drawing geometric equations of legends shortcuts showing 3D graphs functions in work areas student names showing format toolbar	399 1, 4 302 1, 4 554 448 3,318 4312 289 402 20 297 247 142 68
segments creating	356 509 507 512 504 194 358 444 445 96 152 75	handhelds Data & Statistics application defining in Geometry application In Geometry application TI-SmartView™ emulator shapes adding in Notes creating with MathDraw drawing geometric equations of legends shortcuts showing 3D graphs functions in work areas student names	399 1, 4 302 1, 4 554 448 318 312 289 402 20 297 247 142

sliders	547	symbol table	
animating 3D graphs	300	linking columns to	497
sliders, adjusting variable values	208	syntax	
slope	491	using to prevent naming	
measuring274,	-	conflicts	358
software	020	system of equations	184
checking for updates	560	system settings	535
installing updates	560	т	
software licences, activating	557	'	
software version number	561	table data	
solving simple maths expressions	178	graphing	365
sorting		sorting	361
plotted categories	422	using in statistical analysis (Lists	
table data	361	& Spreadsheet)	377
splitting numeric plots by categories	419	table of values	239
spreadsheets		tables	
navigating	353	changing expressions for	
sharing columns as lists	348	functions	397
starting		copying rows or columns	359
transfer	50	deleting contents of cells	355
statistical tests, supported	391	deleting list elements	350
statistics, drawing plots	441	deleting rows and columns	359
status bar	4	displaying list of functions	397
stopping		editing settings	397
file transfers	51	generating column data	362
storage		inserting list elements	350
management	535	inserting rows or columns	359
stored variables		linking columns to lists	349
linking to	205	moving rows or columns	360
storing		navigating in	353
data as sets	485	restoring data	511
striking data	511	selecting rows or columns	358
strings		sharing columns as lists	348
storing as variables	201	showing function values	396
strip charts	475	striking data	511
student handhelds	140	working with cells	354
capturing	140	tangents, creating259,	311
substituting a value for a variable	212	teacher handhelds	
suggested response	156	displaying	142
summary data	403	Teacher Tool Palette	155
summary information, displaying	401	templates	
summary plots		maths179	-180
creating	367	Notes	444
summation functions and templates	546	Proof	444

Q&A	444	variable	
selecting	444	variable	
text		t1 20F	
adding to work areas 217, 244, 304	, 340	tool 205	
changing colours	446	Touchpad, navigating in emulator	554
entering	351	tracing	
formatting in Notes	445	all graphs simultaneously	252
selecting in Notes	445	geometric objects	337
text formatting	67	Transfer	
threshold values		starting	50
increasing/decreasing	483	Transfer List	
TI-84 Plus		removing files	47
enabling Press-to-Test	547	Transfer Press-to-Test restrictions	538
exiting Press-to-Test	549	Transfer Tool	43, 543
transferring files	549	adding files	45
verifying functions are disabled .	549	closing	51
TI-Nspire™ applications		interface	43
images	151	opening	45
TI-Nspire™ Screen Capture Window	135	removing files	47
zooming in/out	136	transferring files to connected	
TI-Nspire™ SmartView Emulator		handhelds	33
capturing images	138	transferring press-to-test to	
TI-SmartView™		handhelds	538
capturing images	133	transformation of objects	277, 329
DragScreen feature	133	triggering	
TI-SmartView™ emulator 54		enabling	485
capturing screens	556	trigonometric functions	545
changing panel width552		troubleshooting information	559
opening	551	turning the handheld on/off	536
opening documents (.tns)	556	U	
options	555	o	
saving documents (.tns)	556	ungrouping	
settings	554	applications	76-77
TI-SmartView™ Emulator	551	pages	76-77
TI websites	559	units	
Tiled view	143	converting measurement	
titles, clicking to see variable names		symbols	185
(Data & Statistics)	399	creating user-defined	186
tool palette	4	Using the Preview Pane	17
toolbar	3	V	
text formatting	67	V	
tools		values	
capture class	140	assigning to variables	200
screen capture	133		

checking in Calculator 202 custom 242 creating 200 windows TI-Nspire™ Screen Capture 135 Graphs & Geometry values 202 wizards wizards wizards wizards tizering expressions (Calculator) 182 entering expressions (Lists & Spreadsheet cells 204 preventing naming conflicts 357 statistics 377 statistics 372 statistics 372<	variables	189	window settings	
Creating from table cells 357	checking in Calculator	202	custom	242
Statistics St	creating	200	windows	
linking 200, 205 linking table columns to lists 349 linking to 205, 357 Lists & Spreadsheet cells 204 preventing naming conflicts 358 removing 212 sharing table columns as lists 348 sharing with other applications 200 substituting a value for 212 types 200 updating in Calculator 211 using 201 using in a calculation 206 vector functions 545 vectors creating 259, 311 version number, locating 561 videos (Publish View™ documents) inserting files 118 video console 119 view 3D Graphing 292 viewing capture class options 143 captured screens 135 documents (.tns) 70 values in lists 349 warnings, showing (Notes) 452 websites, locating troubleshooting	creating from table cells	357		135
linking	Graphs & Geometry values	202		
linking table columns to lists 349 Inking to 205, 357 Lists & Spreadsheet cells 204 preventing naming conflicts 358 customising in Graphs and removing 212 Geometry 244 Geometry 244 Sharing table columns as lists 348 sharing with other applications 200 substituting a value for 212 working with documents 537 Working with Lesson Bundles 123 workspace 200 using in a calculation 206 Variances, pooled 396 vector functions 545 vectors 206 Variances, pooled 396 Vectors 207 Values in lists 349 View 3D Graphing 292 Viewing 294 Graph 466 Page Layout 497 Table 466 Variangs, showing (Notes) 452 Websites, locating troubleshooting 452 Values in Issa 200 Values in Issa 20). 205	= : : : :	182
linking to		•	·	
Lists & Spreadsheet cells 204 preventing naming conflicts 358 removing 212 Geometry 244 sharing table columns as lists 348 sharing with other applications 200 substituting a value for 212 working with documents 537 types 200 updating in Calculator 211 using 200 using in a calculation 206 vector functions 545 vectors 259 vectors 259, 311 vresion number, locating 561 videos (PublishView™ documents) inserting files 118 video console 119 view 230 Graphing 292 viewing 240 Capture class options 143 capture dass options 143 capture dasr cens 135 documents (.tns) 70 values in lists 349 views 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting	linking to			
preventing naming conflicts 358 removing 212 sharing table columns as lists 348 sharing with other applications 200 substituting a value for 212 updating in Calculator 211 using 200 variances, pooled 396 vector functions 545 vectors creating 259, 311 version number, locating 561 videos (Publish View™ documents) inserting files 118 video console 119 view 3D Graphing 292 viewing 290 views 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting veroning time to the removing the large and the properties of the properties				377
removing 212 Geometry 244 sharing table columns as lists 348 sharing with other applications 200 substituting a value for 212 types 200 updating in Calculator 211 using 200 using in a calculation 206 variances, pooled 396 vector functions 545 vectors 259, 311 version number, locating 561 videos (PublishView™ documents) inserting files 118 video console 119 view 3D Graphing 292 viewing 242 capture class options 143 captured screens 135 documents (.tns) 70 values in lists 349 views 3D Graphing 294 Graph 466 Page Layout 497 Table 466 Page Layout 170 warnings, showing (Notes) 452 websites, locating troubleshooting	preventing naming conflicts			
sharing table columns as lists 348 sharing with other applications 200 substituting a value for 212 types 200 Working with documents 537 types 200 Working with documents 537 types 200 Working with Lesson Bundles 123 updating in Calculator 211 workspace 200 Content 2 using 200 Content 2 200 Documents 33 variances, pooled 396 vector functions 545 Content Workspace 52 creating 259, 311 version number, locating 561 videos (PublishView™ documents) inserting files 118 video console 119 view 3D Graphing 292 viewing 292 viewing 292 viewing 292 viewing 292 viewing 294 Graph 466 Page Layout 497 Table 466 Page Layout 497 Table 466 Page Layout (Notes) 452 websites, locating troubleshooting				2//
sharing with other applications 200 adding text to 217, 244, 304, 340 substituting a value for 212 working with documents 537 types	=		,	_++
substituting a value for 212 working with documents 537 types 200 Working with Lesson Bundles 123 updating in Calculator 211 using 200 Content 2 2 200 using in a calculation 206 Variances, pooled 396 vector functions 545 Vectors creating 259, 311 version number, locating 561 videos (PublishView™ documents) inserting files 118 video console 119 view 3D Graphing 292 viewing capture class options 143 captured screens 135 documents (.tns) 70 documents (.tns) 70 values in lists 349 views 3D Graphing 294 Graph 466 Page Layout 497 Table 466 ■ W warnings, showing (Notes) 452 websites, locating troubleshooting	· ·			340
types 200 Working with Lesson Bundles 123 updating in Calculator 211 workspace using 200 Content 2 using in a calculation 206 Documents 3 variances, pooled 396 vector functions 545 Workspaces vectors 545 Content Workspace 15 vectors 656 Vectors 657 Documents Workspace 52 creating 259, 311 version number, locating 561 videos (PublishView™ documents) inserting files 118 video console 119 view 7 3D Graphing 292 viewing 7 capture class options 143 handheld preview 68 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views 7 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting	= ; ;			
updating in Calculator 211 workspace using 200 Content 2 using in a calculation 206 Documents 3 variances, pooled 396 vector functions 545 Content Workspaces vectors 52 Content Workspace 15 vectors 545 Documents Workspace 52 creating 259, 311 version number, locating 561 videos (PublishView™ documents) inserting files 118 video console 119 view 7 3D Graphing 292 viewing 7 capture class options 143 handheld preview 68 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views 7 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting	•		·	
using 200 Content 2 using in a calculation 206 Documents 3 variances, pooled 396 workspaces vector functions 545 Content Workspace 15 vectors 52 Content Workspace 52 creating 259, 311 exploring 15 version number, locating 561 X videos (PublishView™ documents) 118 X-Y line plots 413 video console 119 X-Y line plots 413 view 2 200ming 242 sexploring 15 X Views 20 200ming 242 capture class options 143 handheld preview 68 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views 294 Graph 466 Page Layout 497 Table 466 W 452 websites, locating tro			•	123
using in a calculation 206 Documents 3 variances, pooled 396 vector functions 545 Vectors 545 Content Workspace 552 Creating 259, 311 exploring 15 version number, locating 561 videos (PublishView™ documents) inserting files 118 video console 119 view 2 3D Graphing 292 viewing capture class options 143 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views 7 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting			•	2
variances, pooled 396 vector functions 545 vectors 525 creating 259, 311 version number, locating 561 videos (PublishView™ documents) inserting files 118 video console 119 view 2 3D Graphing 292 viewing 292 viewing 292 viewing 300 capture class options 143 captured screens 135 documents (.tns) 70 views 70 documents (.tns) 70 views 90 Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting	_			
vector functions 545 Content Workspace 15 vectors Documents Workspace 52 creating 259, 311 exploring 15 version number, locating 561 videos (PublishView™ documents) inserting files 118 video console 119 view Z 3D Graphing 292 viewing 200ming 242 capture class options 143 handheld preview 68 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views PublishView™ documents 108 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting			workspaces	Ū
vectors creating	•			15
creating		545	Documents Workspace	52
version number, locating 561 videos (PublishView™ documents) inserting files 118 video console 119 view Z 3D Graphing 292 viewing 200ming 242 capture class options 143 captured screens 135 documents (.tns) 70 documents (.tns) 70 views 108 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting		211		15
videos (PublishView™ documents) inserting files		•		
inserting files 118 video console 119 view Z 3D Graphing 292 viewing zooming 242 capture class options 143 handheld preview 68 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views PublishView™ documents 108 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting		301	Х	
video console 119 view Z 3D Graphing 292 viewing zooming 242 capture class options 143 handheld preview 68 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views PublishView™ documents 108 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting		118	V V line plats	
yiew 292 viewing 292 viewing 200ming 242 capture class options 143 handheld preview 68 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views PublishView™ documents 108 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting		_	X-1 lifte plots	113
3D Graphing 292 viewing zooming 242 capture class options 143 handheld preview 68 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views PublishView™ documents 108 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting		113	7	
viewing zooming 242 capture class options 143 handheld preview 68 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views PublishView™ documents 108 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting	3D Graphing	292	_	
capture class options 143 handheld preview 68 captured screens 135 in 507 documents (.tns) 70 in/out 136, 146 values in lists 349 out 507 views PublishView™ documents 108 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting			zooming	242
documents (.tns) 70 in/out136, 146 values in lists 349 out	capture class options	143	handheld preview	68
values in lists 349 out 507 views PublishView™ documents 108 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting	captured screens	135	in 5	507
views PublishView™ documents 108 3D Graphing 294 Graph 466 Page Layout 497 Table 466 W warnings, showing (Notes) 452 websites, locating troubleshooting	documents (.tns)	70	in/out136, 1	146
3D Graphing	values in lists	349	out	507
Graph	views		PublishView™ documents 1	108
Page Layout	3D Graphing	294		
Table	Graph	466		
warnings, showing (Notes) 452 websites, locating troubleshooting	Page Layout	497		
warnings, showing (Notes) 452 websites, locating troubleshooting	Table	466		
warnings, showing (Notes) 452 websites, locating troubleshooting	W			
websites, locating troubleshooting				
		452		
information 559				
	information	559		